

This file is provided FREE OF CHARGE from the
electromaniacs.com community

You are free to distribute this file to other persons
who needs it , but without of charge

Also on <http://electromaniacs.com> you can find
thousands of service manuals , schematics free of
charge




AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

JVC

SERVICE MANUAL

COLOUR TELEVISION

**AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB**

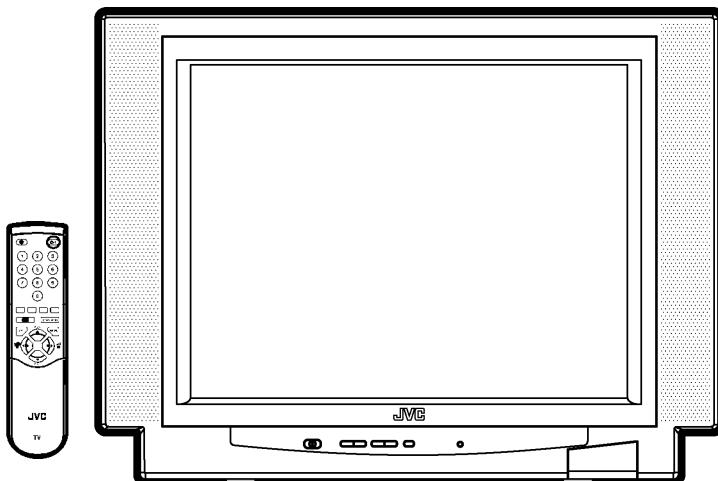

CONTENTS

■ SPECIFICATIONS	2
■ SAFETY PRECAUTIONS	4
■ FEATURES	5
■ MAIN DIFFERENCE LIST	5
■ SPECIFIC SERVICE INSTRUCTIONS	6
■ SERVICE ADJUSTMENTS	9
■ PARTS LIST	21
★ OPERATING INSTRUCTIONS	
★ STANDARD CIRCUIT DIAGRAM	2-1

AV28BH7ENS / AV28BH7ENB
 AV28BH7EPS / AV28BH7EPB
 AV28BH7EES / AV28BH7EEB

SPECIFICATIONS

Item	Content				
	AV28BH7ENS AV28BH7ENB	AV28BH7EPS AV28BH7EPB	AV28BH7EES AV28BH7EEB		
Dimensions (W x H x D)	77cm x 58cm x 48cm				
Mass	33.2 kg				
TV RF System	B/G	B/G, L/L'	B/G, D/K, K1		
Colour System	TV Mode	PAL	PAL / SECAM		
	Video Mode	PAL / NTSC 3.58 / NTSC 4.43	PAL / SECAM / NTSC 3.58 / NTSC 4.43		
Teletext System	FLOF(Fastext) / TOP				
Stereo System	A2 / NICAM				
Tuning System	Frequency Synthesizer Tuning System				
Number of CH Memory Position	200 ch				
Receiving Frequency	VHF (VL)	46.25MHz ~ 168.25MHz			
	VHF (VH)	175.25MHz ~ 463.25MHz			
	UHF	471.25MHz ~ 863.25MHz			
	CATV	S1-S20 & S21-S41 & S75-S79	B/G : S01-S41 / S75-S79 L : S01-S41 / S75-S77 D/K : S01-S41		
Intermediate Frequency	VIF Carrier	38.9MHz			
	SIF Carrier	32.4MHz (6.5MHz)			
		32.9MHz (6.0MHz)			
		33.4MHz (5.5MHz)			
Colour Sub Carrier Frequency	PAL (4.43MHz), SECAM (4.43MHz), NTSC (3.58MHz/4.43MHz)				
Aerial Input Terminal	75 Ohm Unbalanced				
Power Input	AC 220V ~ 240V, 50Hz				
Power Consumption	175W (Max.) / 130W (Avg.)				
Picture Tube	28 inch measured diagonally				
High Voltage	29.5kV (in cut-off service mode)				
Speaker	57 x 160 mm ellipse type x2 + Tweeter x2				
Audio Output	12W + 12W				
Input	Video	1V(p-p), 75 Ohm			
	Audio (L/R)	500mV(rms), High Impedance			
Output	Video	1V(p-p), 75 Ohm			
	Audio (L/R)	500mV(rms), Low Impedance			
Input Terminal	Rear Side	EXT 1 (Video/Audio/RGB)			
		EXT 2 (Video/Audio/S-VHS)			
	Front Side	F AV (Video/Audio)			
Output Terminal	Front Side	Headphone jack (Stereo mini jack, 3.5mmØ)			
		EXT 1 (Video/Audio)			
	Rear Side	EXT 2 (Video/Audio) (Selected TV, AV1 or AV3)			
Remote Control Unit	VE-30015781 (RM-C85), Battery size:AAA/R03 x 2				


Design & specifications are subject to change without notice.

■ 21-pin Euro connector (SCART socket) : EXT 1 / EXT 2

(P-P= Peak to Peak, S-W= Sync tip to white peak, B-W= Blanking to white peak)

Pin No.	Signal Designation	Matching Value	EXT 1	EXT 2
1	AUDIO R output	500mVrms(Nominal),Low impedance	<input type="radio"/> (TV OUT)	<input type="radio"/> (TV/LINE OUT)
2	AUDIO R input	500mVrms(Nominal),High impedance	<input type="radio"/>	<input type="radio"/>
3	AUDIO L output	500mVrms(Nominal),Low impedance	<input type="radio"/> (TV OUT)	<input type="radio"/> (TV/LINE OUT)
4	AUDIO GND		<input type="radio"/>	<input type="radio"/>
5	GND (B)		<input type="radio"/>	<input type="radio"/>
6	AUDIO L input	500mVrms(Nominal), High impedance	<input type="radio"/>	<input type="radio"/>
7	B input	700mVB-W, 75Ω	<input type="radio"/>	NC
8	FUNCTION SW (SLOW SW)	Low : 0-3V, High : 8-12V, High impedance	<input type="radio"/>	NC
9	GND (G)		<input type="radio"/>	<input type="radio"/>
10	-		NC	-
11	G input	700mVB-W, 75Ω	<input type="radio"/>	NC
12	-		NC	-
13	GND (R)		<input type="radio"/>	<input type="radio"/>
14	GND (YS)		<input type="radio"/>	NC
15	R / C input	R : 700mVB-w, 75Ω C : 300mVP-P, 75Ω	<input type="radio"/> (R/C)	<input type="radio"/> (only C)
16	Ys input	Low : 0 – 0.4, High : 1 - 3V, 75 Ω	<input type="radio"/>	NC
17	GND(VIDEO output)		<input type="radio"/>	<input type="radio"/>
18	GND(VIDEO input)		<input type="radio"/>	<input type="radio"/>
19	VIDEO output	1Vsw (Negative going sync), 75Ω	<input type="radio"/> (TV)	<input type="radio"/> (TV/LINE OUT)
20	VIDEO / Y input	1Vsw (Negative going sync), 75Ω	<input type="radio"/>	<input type="radio"/>
21	COMMON GND		<input type="radio"/>	<input type="radio"/>

[Pin assignment]

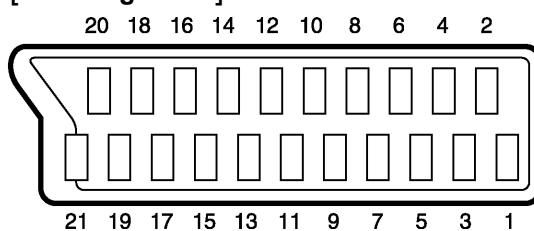

SAFETY PRECAUTIONS

1. The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
2. Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
3. Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (Δ) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
4. **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**
 Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE side GND, the ISOLATED(NEUTRAL) side GND and EARTH side GND. Don't short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND and never measure with a measuring apparatus (oscilloscope etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND at the same time.
 If above note will not be kept, a fuse or any parts will be broken.
5. If any repair has been made to the chassis, it is recommended that the B1 setting should be checked or adjusted (See ADJUSTMENT OF B1 POWER SUPPLY).
6. The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approved by the manufacturer of the complete product.
7. Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a $10k\Omega$ 2W resistor to the anode button.
8. When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

9. Isolation Check

(Safety for Electrical Shock Hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screwheads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

(1) Dielectric Strength Test

The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 3000V AC (r.m.s.) for a period of one second.

(.... Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.)

This method of test requires a test equipment not generally found in the service trade.

(2) Leakage Current Check


Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

● Alternate Check Method

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000 ohms per volt or more sensitivity in the following manner. Connect a 1500Ω 10W resistor paralleled by a $0.15\mu F$ AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).

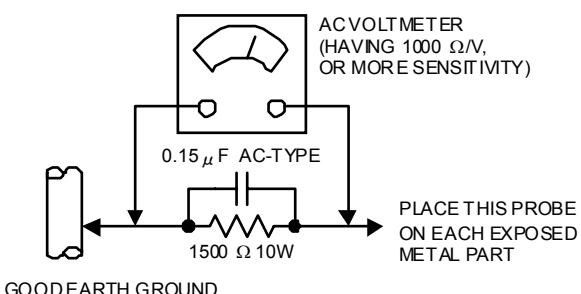

FEATURES

1. It is a remote controlled color television.
2. 200 programs from VHF, UHF bands or cable channels can be preset.
3. It can tune cable channels.
4. Controlling the TV is very easy by its menu driven system.
5. It has two Euro connector sockets for external device (such as video recorder, video games, audio set, etc.)
6. Front AV Input available.
7. Stereo sound systems (A2 + NICAM) are available.
8. Full function Teletext (Fastext, TOP).
9. It is possible to connect headphone.
10. Direct channel access.
11. APS (Automatic Programming System).
12. All programs can be named.
13. Forward or backward automatic tuning.
14. Automatic sound mute when no transmission.
15. 5 minutes after the broadcasting (closedown), the TV switches itself automatically to stand-by mode.

MAIN DIFFERENCE LIST

Parts Name \ MODEL No.	AV28BH7ENS (Silver)	AV28BH7ENB (Black)	AV28BH7EPS (Silver)	AV28BH7EPB (Black)	AV28BH7EES (Silver)	AV28BH7EEB (Black)
MAIN PWB	VE-20084580	←	VE-20084599	←	VE-20084594	←
INST BOOK	VE-50023325	←	VE-50023329	←	VE-50023332	←
FRONT CABINET	VE-20086394	VE-20086395	VE-20086394	VE-20086395	VE-20086394	VE-20086395
FRONT AV DOOR	VE-20069219	VE-20086314	VE-20069219	VE-20086314	VE-20069219	VE-20086314
BACK COVER	VE-20084616	VE-20069018	VE-20084616	VE-20069018	VE-20084616	VE-20069018
BACK DOOR	VE-20087523	VE-20040684	VE-20087523	VE-20040684	VE-20087523	VE-20040684
BUTTON ON/OFF	VE-20083491	VE-20069016	VE-20083491	VE-20069016	VE-20083491	VE-20069016
BUTTON ASS'Y	VE-20083490	VE-20081484	VE-20083490	VE-20081484	VE-20083490	VE-20081484
BASE	VE-20078582	VE-20081578	VE-20078582	VE-20081578	VE-20078582	VE-20081578
SHASSIS FRAME	VE-20004005	VE-20040575	VE-20004005	VE-20040575	VE-20004005	VE-20040575
LOGO JVC	VE-40009154	VE-40009152	VE-40009154	VE-40009152	VE-40009154	VE-40009152

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

SPECIFIC SERVICE INSTRUCTIONS

DISASSEMBLY PROCEDURE

REMOVING THE REAR COVER

1. Remove the **8** screws marked **A**.
2. Remove the **4** screws marked **B**.
3. Withdraw the rear cover toward you.

REMOVING THE MAIN PWB

- After removing the rear cover.
1. Draw out back and remove the MAIN PWB ASS'Y,

NOTES

Be careful enough when developing a main chassis.
The wire of a POWER TRANSFER does not separate and short-circuit with other parts.

REMOVING THE FRONT AV + HEADPHONE JACK PWB

- After removing the rear cover.
1. Remove the **2** screws marked **C**, and remove the FRONT AV + HEADPHONE JACK PWB.


REMOVING THE FRONT CONTROL PWB

- After removing the rear cover.
1. Remove the MAIN PWB ASS'Y.
 2. Remove the **5** screws marked **D**, and remove the FRONT CONTROL PWB.

REMOVING THE SPEAKER

- After removing the rear cover.
1. Remove the **4** screws marked **E**, and remove the SPEAKER.
 2. Remove the **2** screws marked **F**, and remove the TWEETER SPEAKER.
 3. Remove an opposite side similarly.

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

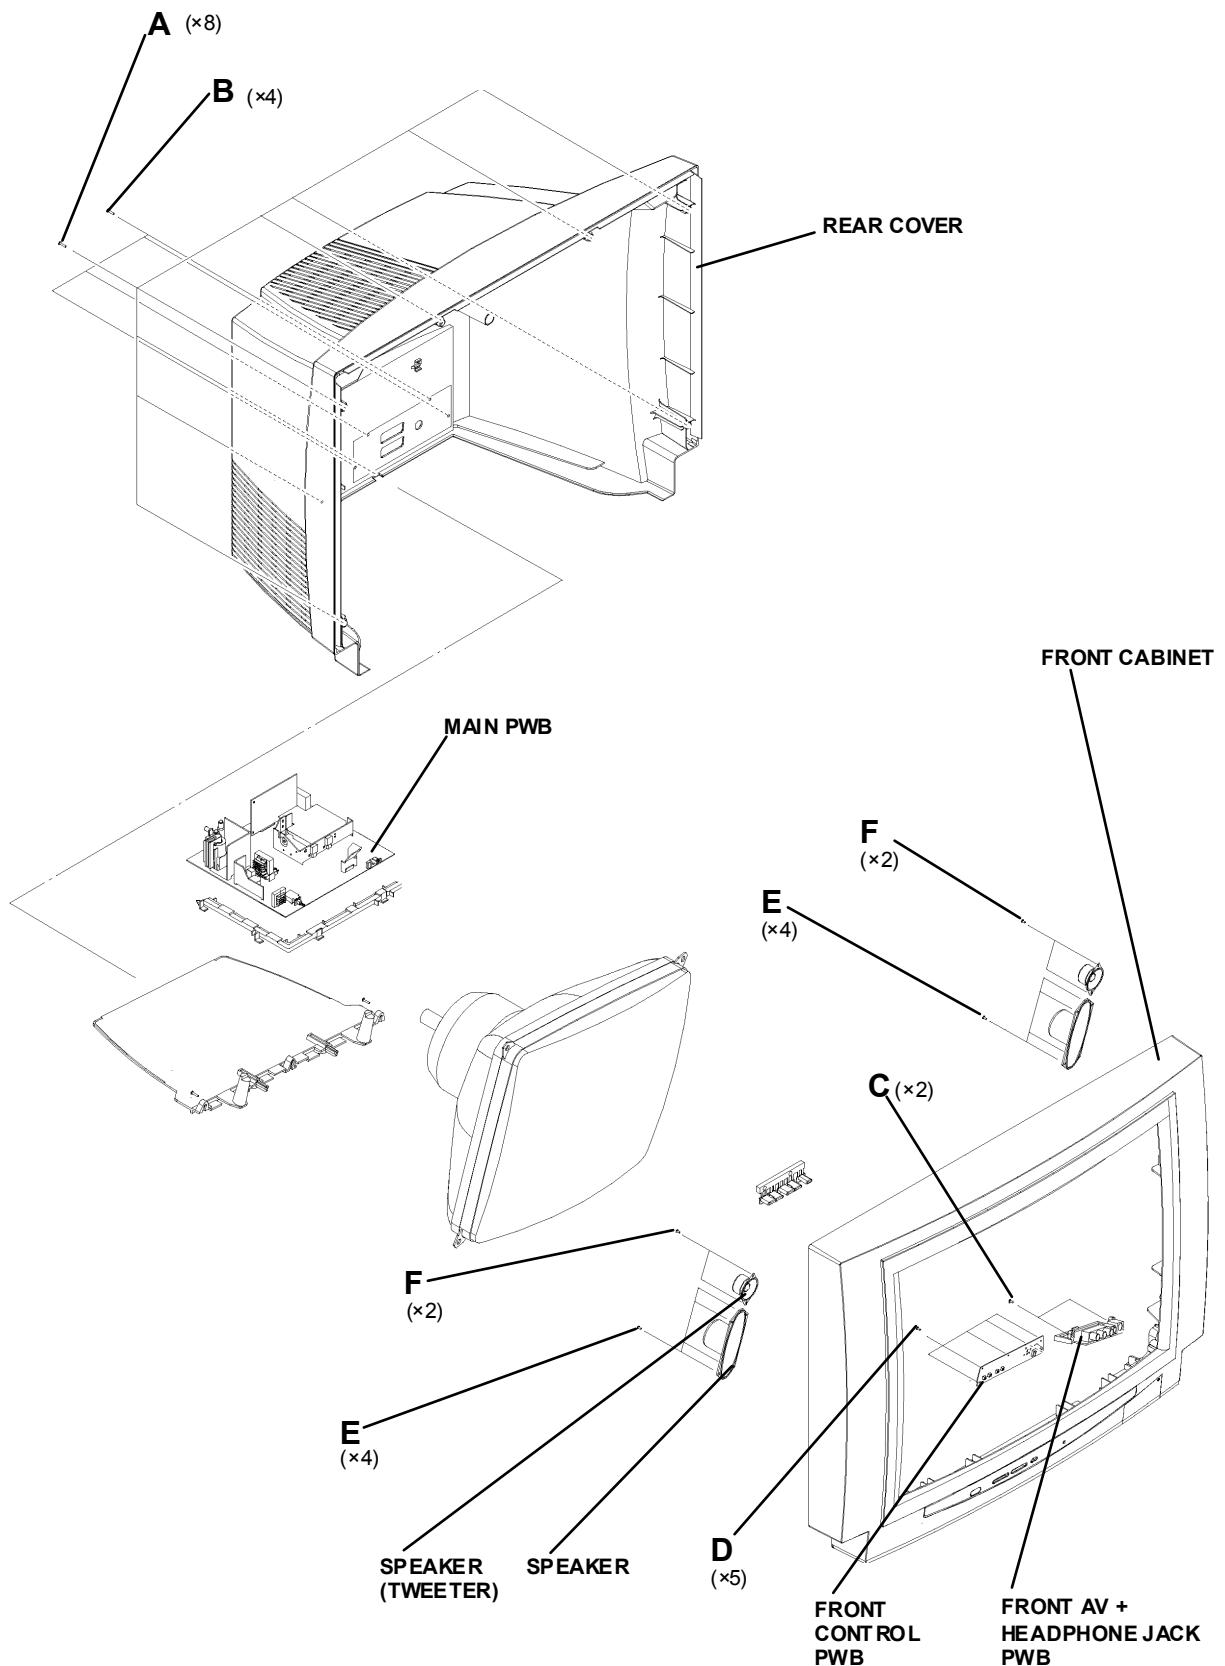

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

SETTING OF THE LAST MEMORY FOR SHIPMENT

■ USER SETTING VALUES

Setting Item	Setting Value	Setting Item	Setting Value
SOUND MENU		FEATURE MENU	
BASS	CENTER	SLEEP TIMER	OFF
TREBLE	↑	CHILD LOCK	OFF
BALANCE	↑	EXT-2 OUTPUT	TV
EFFECT	OFF	PICTURE MENU	
PICTURE MENU		INSTALL → TV CONFIG. MENU	
BRIGHTNESS	These adjust are automatically restored when APS bit in Service menu is set. The procedure for setting APS bit is described below.	LANGUAGE	ENGLISH
COLOUR		COUNTRY	Other
CONTRAST			
SHARPNESS			
HUE (only NTSC)			
PICTURE MODE	AUTO		

■ SETTING APS “ON” IN SERVICE MENU

- 1) Enter service menu in TV mode by pressing “INFO” and “MUTE” keys simultaneously. Service Menu will appear.
- 2) Select VIDEO by pressing “GREEN” key on remote controller.
- 3) Choose APS item by pressing Up/Down keys on remote controller.
- 4) Change the value to “ON” by pressing Left/Right keys on remote controller.
- 5) Store the change by pressing “INFO” button.
- 6) Exit service mode by pressing “STANDARD” key on remote control.

SERVICE ADJUSTMENTS

ADJUSTMENT PREPARATION


1. You can make the necessary adjustments for this unit with either the Remote Control Unit or With the adjustment tools and parts as given below.
2. Adjustment with the Remote Control Unit is made on the basis of the initial setting values, however, the new setting values which set the screen to its optimum condition may differ from the initial settings.
3. Make sure that AC power is turned on correctly.
4. Turn on the power for set and test equipment before use, and start the adjustment procedures after waiting at least 30 minutes.
5. Unless otherwise specified, prepare the most suitable reception or input signal for adjustment.
6. Never touch any adjustment parts which are not specified in the list for this adjustment - variable resistors, transformers, condensers, etc.
7. Presetting before adjustment.
Unless otherwise specified in the adjustment instructions, preset the following functions with the remote control unit:

VIDEO STATUS	STANDARD
TINT / COLOUR	
PICTURE / BRIGHT	CENTER
DETAIL	

ADJUSTMENT EQUIPMENT

1. DC voltmeter (or digital voltmeter)
2. Signal generator (Pattern generator) [PAL/SECAM/NTSC]
3. Remote control unit

MAIN PARTS LOCATIONS

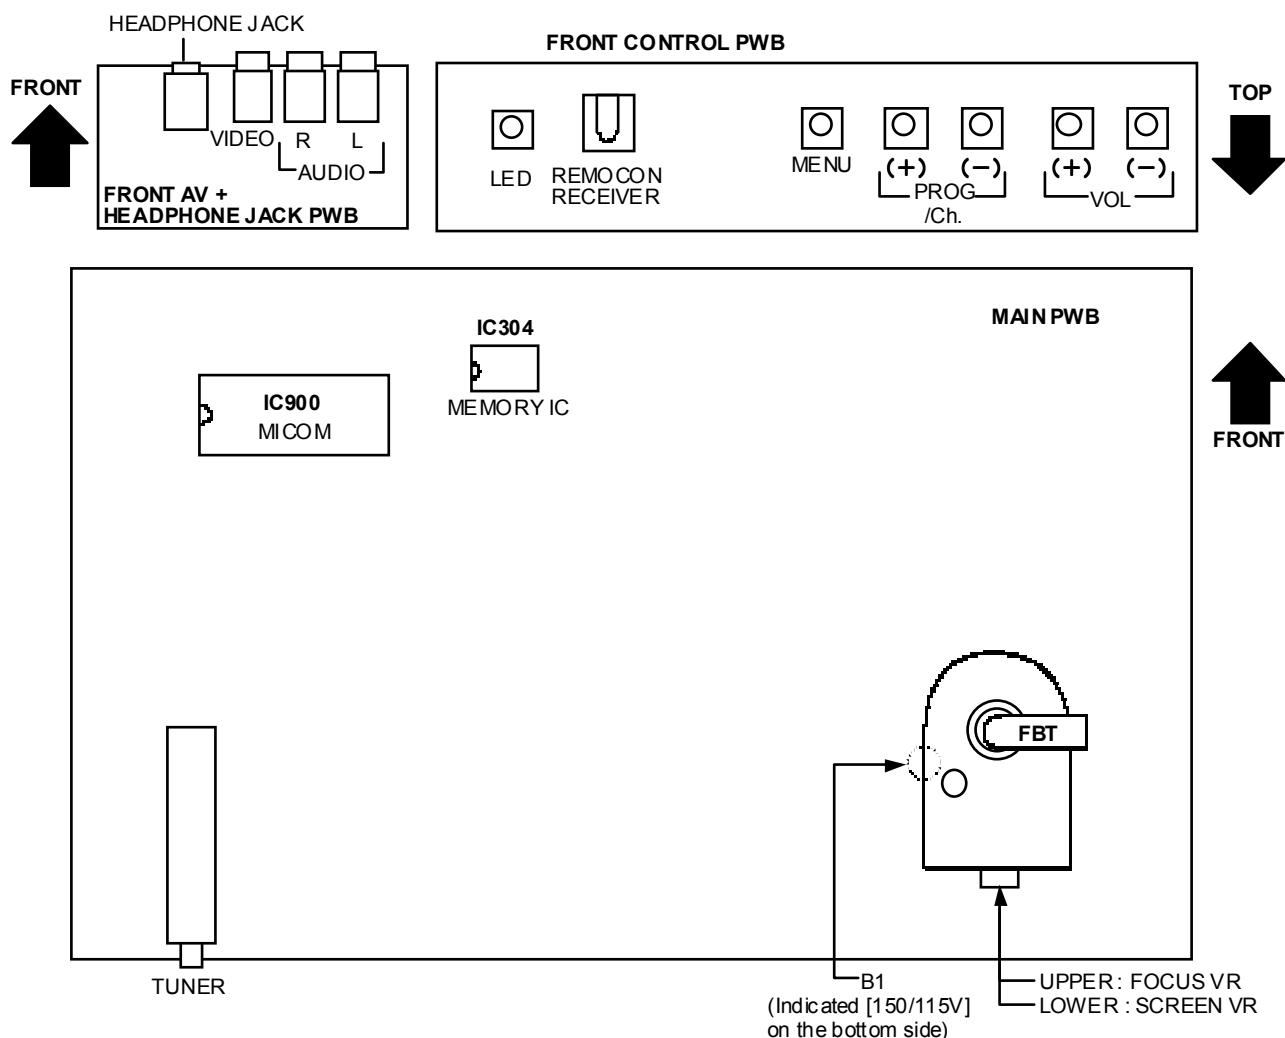

BASIC OPERATION SERVICE MENU

■ HOW TO ENTER THE SERVICE MODE

- 1) Press the **INFORMATION** key and **MUTING** key of REMOTE CONTROL UNIT simultaneously, and the SERVICE MENU screen of Fig.1 will be displayed.

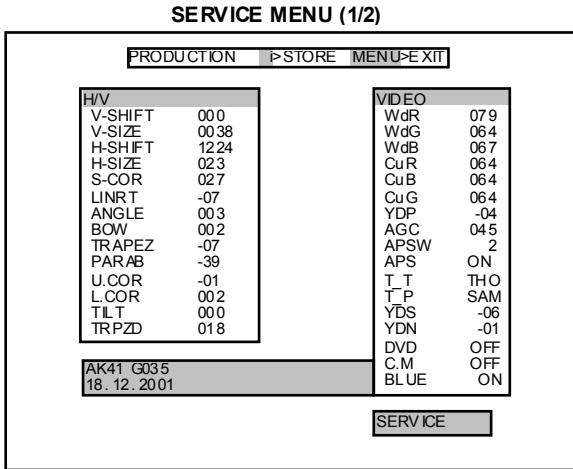


Fig.1

- 2) While the Fig.1 is displayed, press the **BLUE** key for access to the SERVICE MENU (2/2) (Fig.2).


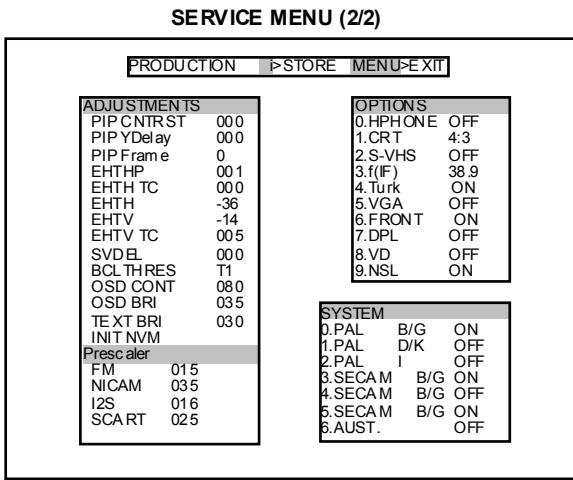


Fig.2


■ HOW TO EXIT SERVICE MODE

- 1) Press the **MENU** Key on REMOTE CONTROL UNIT.

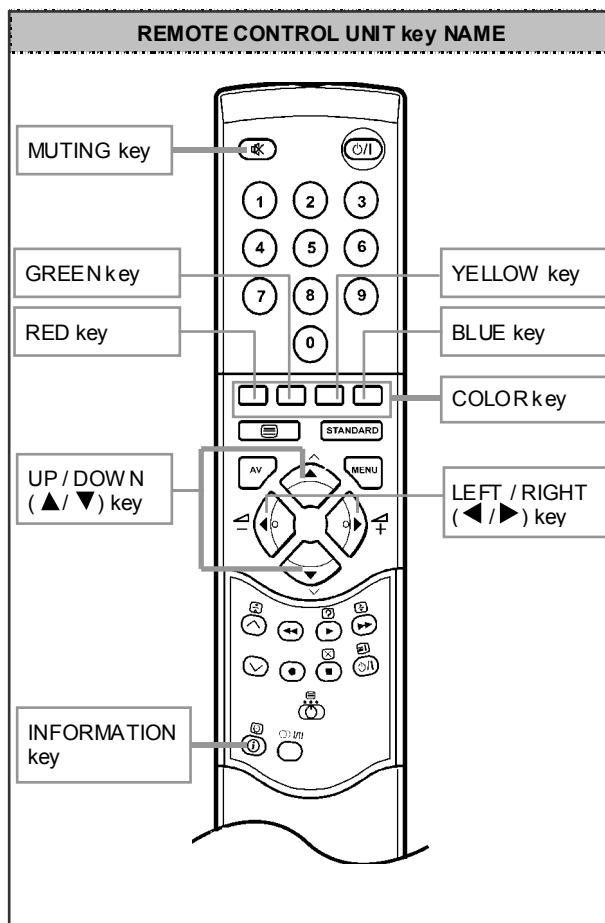

■ SELECTION OF ADJUSTMENT ITEMS

- 1) Press the **COLOR** key and select the service menu section.
- 2) Select the **ADJUST** Item, use **UP (▲)** / **DOWN (▼)** key of remote control unit.
- 3) To change the selected parameter, use **LEFT (◀)** and **RIGHT (▶)** key.
- 4) Press the **INFORMATION** key to STORE.

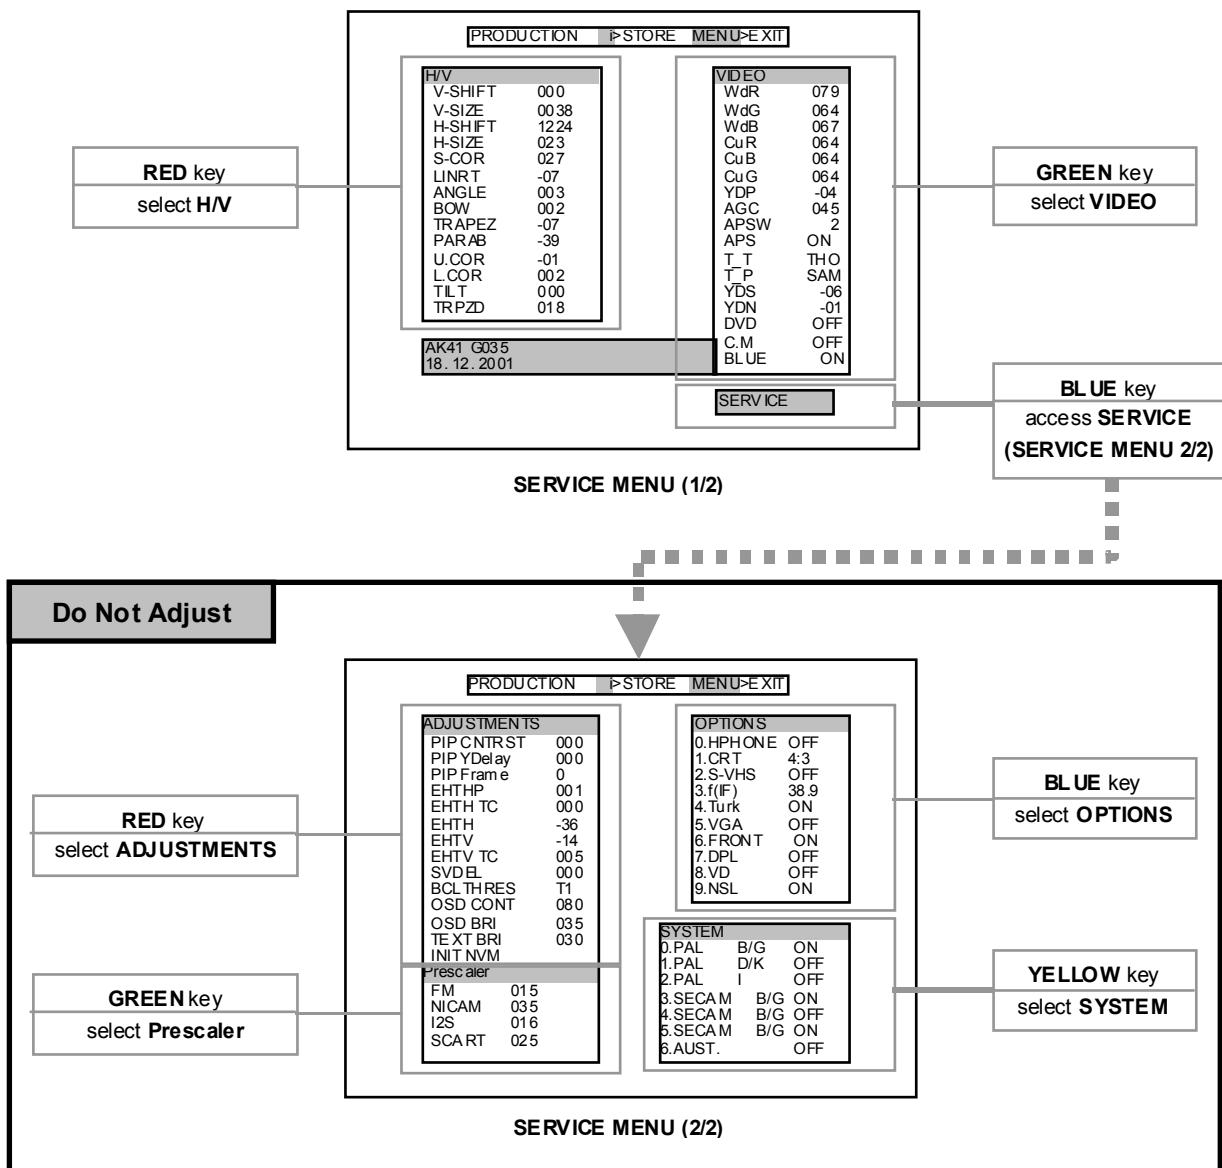

■ HOW TO EXIT SERVICE MODE

- 1) Press the **MENU** Key on REMOTE CONTROL UNIT.

AV28BH7ENS / AV28BH7ENB
 AV28BH7EPS / AV28BH7EPB
 AV28BH7EES / AV28BH7EEB

■ ADJUSTMENT SERVICE MENU & INITIAL SETTING VALUE



	ADJUSTMENT ITEM	DESCRIPTION	INITIAL VALUE
H/V	V-SHIFT	VERTICAL SHIFT CORRECTION	000
	V-SIZE	VERTICAL SIZE CORRECTION	0038
	H-SHIFT	HORIZONTAL SHIFT CORRECTION	1224
	H-SIZE	HORIZONTAL SHIFT CORRECTION	023
	S-COR	S-CORRECTION	027
	LINRT	LINEARITY CORRECTION	-07
	ANGLE	ANGLE CORRECTION	003
	BOW	BOW CORRECTION	002
	TRAPEZ	TRAPEZIUM CORRECTION	-07
	PARAB	PARABOLA CORRECTION	-39
	U.COR	UPPER PART CORRECTION	-01
	L.COR	LOWER CORRECTION	002
	TILT	TILT CORRECTION	000
	TRPZD	TRAPEZOID CORRECTION	018
VIDEO	WdR	White Balance Adjustment	079
	WdG	White Balance Adjustment	064
	WdB	White Balance Adjustment	067
	CuR	Colour Cut -off Levels	064
	CuB	Colour Cut -off Levels	064
	CuG	Colour Cut -off Levels	064
	YDP	Y-delay PAL	-04
	AGC	Automatic Gain Control	045
	APSW	APS Wait Time	2
	APS	Automatic Program Sort	ON
	T_T	Set the main tuner type	THO
	T_P	Set the PIP tuner	SAM
	YDS	Y-delay SECAM	-06
	YDN	Y-delay NTSC	-01
	DVD	If the TV set has DVD player, this option is set ON.	OFF
	C.M	This option toggles the Carrier Mute function. If set ON, the sound is muted if the sound carrier is shifter over 1MHz.	OFF
	BLUE	If this option is set ON, the screen is covered with blue background when there is no video signal and between channel changes.	ON



■ ADJUSTMENT SERVICE MENU & INITIAL SETTING VALUE (Do not Adjust)

ADJUSTMENT GROUP	ADJUSTMENT ITEM	DESCRIPTION	INITIAL VALUE
ADJUST MENTS	PIP CNTRST	Adjust the contrast of the picture inside the PIP window.	000
	PIP Y Delay	Adjust the luminance delay (with respect to colour) of the picture inside the PIP window.	000
	PIP Frame	Decides the colour and shape of the boarder around the PIP window.	0
	EHTHP	EHT compensation coefficient for horizontal phase.	001
	EHTH TC	EHT time constant for horizontal phase compensation.	000
	EHTH	EHT compensation coefficient for horizontal amplitude ($\pm 100\%$).	-36
	EHTV	EHT compensation coefficient for vertical amplitude ($\pm 25\%$).	-14
	EHTV TC	Time constant for control of vertical and horizontal amplitude EHT compensation.	005
	SVDEL	Delay of SVMOUT in steps of 12.5 ns. (7=SVMOUT vs. RGBOUT is 60ns)	000
	BCL THRES	Beam current limit threshold adjustment. (select T1 for 28 inch 4:3 tube)	T1
	OSD CONT	This item is used to set the OSD and Teletext Contrast.	080
	OSD BRI	This item is used to set the OSD Brightness.	035
	TEXT BRI	This item is used to set the Teletext Brightness.	030
	INIT NVM	Select to initialize the EEPROM to the factory defaults.	
Prescaler	FM	Defines the FM stereo prescale value for sound output power.	015
	NICAM	Defines the NICAM stereo prescale value for sound output power.	035
	I2S	Defines the I2S prescale value.	016
	SCART	Defines the SCART sound output prescale value.	025
OPTIONS	0.HPHONE	Switched headphone	OFF
	1.CRT	This item is used to select the tube. It can be set to 4:3 or 16:9.	4:3
	2.S-VHS	If the TV set has an S-VHS interface this item is set ON.	OFF
	3.f(IF)	This value should be 38.9 (contrast)	38.9
	4.Turk	Turkish menu language is visible when set ON.	ON
	5.VGA	This item should always be OFF.	OFF
	6.FRONT	If the TV set has a Front AV interface this item is set ON.	ON
	7.DPL	If the TV set has a Dolby ProLogic sound system, this item is set ON.	OFF
	8.VD	If the TV set has a Virtual Dolby sound system, this item is set ON.	OFF
	9.NSL	When set ON, sharpness range on the picture is increased.	ON
SYSTEM	0.PAL B/G	Defines whether PAL BG stand is available or not.	ON
	1.PAL D/K	Defines whether PAL DK standard is available or not.	OFF (ENS,ENB) OFF (EPS,EPB) ON (EES,EEB)
	2.PAL I	Defines whether PAL I standard is available or not.	OFF
	3 SECAM B/G	Defines whether SECAM BG standard is available or not.	ON
	4 SECAM D/K	Defines whether SECAM DK standard is available or not.	OFF
	5 SECAM L/L'	Defines whether SECAM LL' standard is available or not.	OFF (ENS,ENB) ON (EPS,EPB) OFF (EES,EEB)
	6.AUST.	When set ON, Australia channel table becomes available.	OFF



ADJUSTMENTS



■ DEFLECTION CIRCUIT

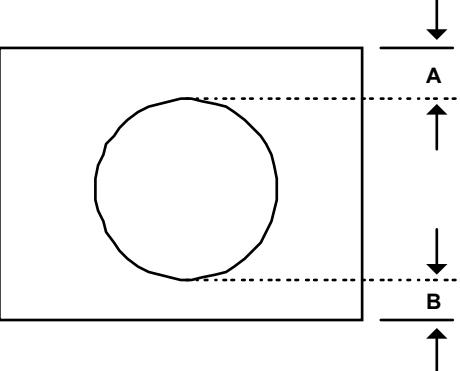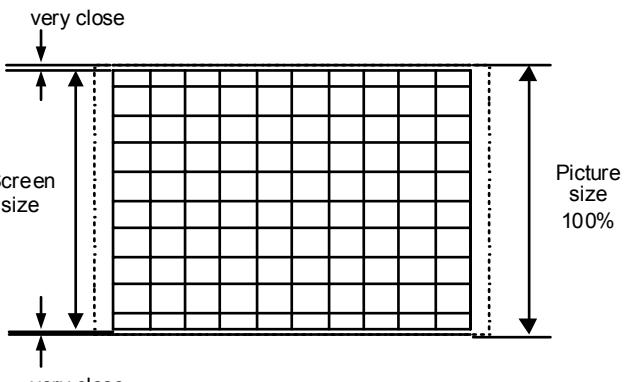Item	Measuring instrument	Test point	Adjustment part	Description
AGC adjustment	Signal generator Remote control unit		AGC	<ol style="list-style-type: none"> Receive a PAL BG signal at 60dB μ V RF signal level. Select AGC with the UP/DOWN (\blacktriangle/∇) key. Adjust AGC by pressing with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till voltage at pin9 of PL202 is equal to 3.0V. Press the MENU key and memorize the set value.
V-SHIFT adjustment	Signal generator Remote control unit		V-SHIFT	<ol style="list-style-type: none"> Receive a circle pattern signal of vertical frequency 50Hz. Select V-SHIFT with the UP/DOWN (\blacktriangle/∇) key. Adjust V-SHIFT with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key to make A = B. Check and readjust V-SHIFT item if the adjustment becomes improper after some other geometric adjustments are done. Press the INFORMATION key and memorize the set value.  <p>The diagram shows a circle centered within a rectangular frame. Two horizontal dashed lines extend from the top and bottom edges of the circle to the frame. An upward-pointing arrow labeled 'A' is positioned between the top dashed line and the top edge of the frame. A downward-pointing arrow labeled 'B' is positioned between the bottom dashed line and the bottom edge of the frame.</p>
V-SIZE adjustment	Signal generator		V-SIZE	<ol style="list-style-type: none"> Receive a cross-hatch signal. Select V-SIZE with the UP/DOWN (\blacktriangle/∇) key. Adjust V-SIZE with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key until horizontal black lines on both the upper and lower part of the cross-hatch pattern become very close to the upper and lower horizontal sides of picture size and nearly about to disappear. Check and readjust V-SIZE item if the adjustment becomes improper after some other geometric adjustments are done. Press the INFORMATION key and memorize the set value.  <p>The diagram shows a cross-hatch pattern consisting of a grid of small squares. The vertical height of the grid is indicated by two horizontal arrows: one at the top labeled "very close" and one at the bottom labeled "very close". The overall height of the grid is labeled "Screen size". To the right of the grid, a vertical double-headed arrow indicates the "Picture size 100%".</p>

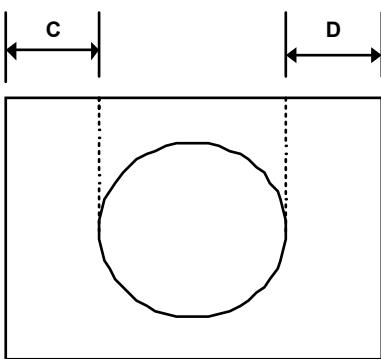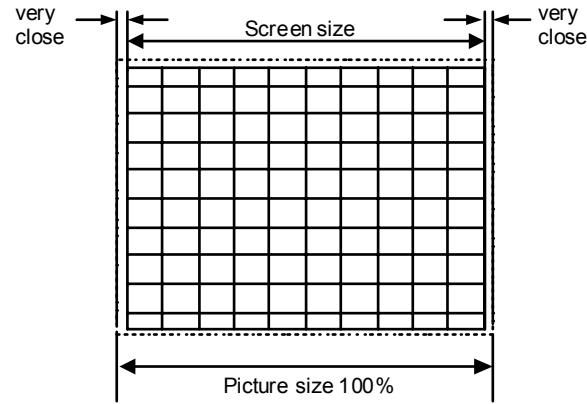Item	Measuring instruments	Test point	Adjustment part	Description
H-SHIFT adjustment	Signal generator Remote control unit		H-SHIFT	<ol style="list-style-type: none"> Receive a circle pattern signal. Select H-SHIFT with the UP/DOWN (Δ/∇) key. Adjust H-SHIFT with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key to make $C=D$. Check and readjust H-SHIFT item if the adjustment becomes improper after some other geometric adjustments are done. Press the INFORMATION key and memorize the set value. 
H-SIZE adjustment	Signal generator Remote control unit		H-SIZE	<ol style="list-style-type: none"> Receive a cross-hatch signal. Select H-SIZE with the UP/DOWN (Δ/∇) key. Adjust H-SIZE with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till vertical lines on both the left and right part of the cross-hatch will be visible nor screen will be so wide. Check and readjust H-SIZE item if the adjustment becomes improper after some other geometric adjustments are done. Press the INFORMATION key and memorize the set value. 

Item	Measuring instruments	Test point	Adjustment part	Description
V. S-CORRECT. & LINEARITY adjustment	Signal generator Remote control unit		S-COR LINRT	<ol style="list-style-type: none"> Receive a cross-hatch signal. Select S-COR with the UP/DOWN (Δ/∇) key. Adjust S-COR with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till the size of squares on both the upper and lower part of cross-hatch pattern become equal to the square laying on the vertical center of the cross-hatch pattern. Check and readjust S-COR item if the adjustment becomes improper after some other geometric adjustments are done. Press the INFORMATION key and memorize the set value Select LINRT with the UP/DOWN (Δ/∇) key. Adjust LINRT with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till all the size of squares of the cross-hatch pattern become in equal size from the top of the screen to its bottom of the whole screen. Check and readjust LINRT item if the adjustment becomes improper after some other geometric adjustments (especially after than S-COR adjustment) are done. Press the INFORMATION key and memorize the set value.
ANGLE adjustment	Signal generator Remote control unit		ANGLE	<ol style="list-style-type: none"> Receive a cross-hatch signal. Select ANGLE with the UP/DOWN (Δ/∇) key. Adjust ANGLE with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till the vertical lines of the crosshatch pattern become straight. Check and readjust ANGLE item if the adjustment becomes improper after some other geometric adjustments are done. Press the INFORMATION key and memorize the set value.

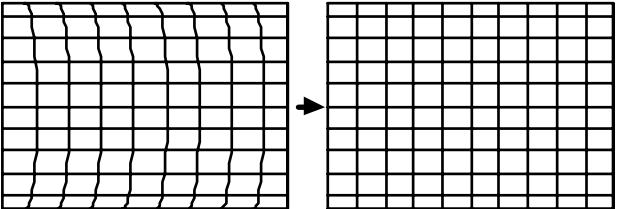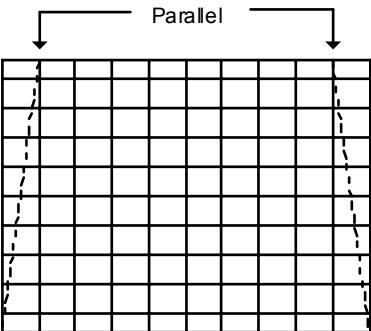Item	Measuring instruments	Test point	Adjustment part	Description
BOW adjustment	Signal generator Remote control unit		BOW	<ol style="list-style-type: none"> 1. Receive a cross-hatch signal. 2. Select BOW with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. 3. Adjust BOW with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key and the vertical line straight. 4. Check and readjust BOW item if the adjustment becomes improper after some other geometric adjustments are done. 5. Press the INFORMATION key and memorize the set value. <p>NOTE In case where there is a bow-shaped distortion of images on the screen. (Figure)</p> 
TRAPEZIUM adjustment	Signal generator Remote control unit		TRAPEZ	<ol style="list-style-type: none"> 1. Receive a cross-hatch signal. 2. Select TRAPEZ with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. 3. Adjust TRAPEZ with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till vertical lines, especially lines at the sides of the picture frame became parallel to the both sides of picture tube as close as possible. 4. Check and readjust TRAPEZ item if the adjustment becomes improper after some other geometric adjustments are done. 5. Press the INFORMATION key and memorize the set value. <p>Parallel</p> 

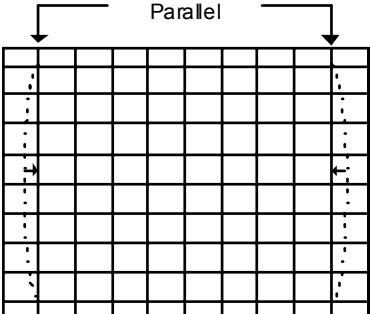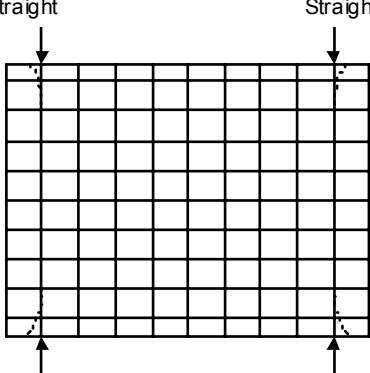Item	Measuring instrument	Test point	Adjustment part	Description
SIDE PIN adjustment	Signal generator Remote control unit		PARAB	<ol style="list-style-type: none"> 1. Receive a cross-hatch signal. 2. Select PARAB with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. 3. Adjust PARAB with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till vertical lines close to the both sides of the picture frame become parallel to vertical sides of picture tube without any bending to left or to right side of the screen. 4. Check and readjust PARAB item if the adjustment becomes improper after some other geometric adjustments are done. 5. Press the INFORMATION key and memorize the set value. 
CORNER adjustment	Signal generator Remote control unit		U.COR L.COR	<ol style="list-style-type: none"> 1. Receive a cross-hatch signal. 2. Select U.COR with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. 3. Adjust U.COR with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till vertical lines at the upper corners of the picture frame become vertical and parallel to vertical corner sides of picture tube. 4. Check and readjust U.COR item if the adjustment becomes improper after some other geometric adjustments are done. 5. Press the INFORMATION key and memorize the set value. 6. Select L.COR with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. 7. Adjust L.COR with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till vertical lines at the lower corners of the picture frame become vertical and parallel to vertical corner sides of picture tube. 8. Check and readjust L.COR item if the adjustment becomes improper after some other geometric adjustments are done. 

■ VIDEO CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
WHITE BALANCE adjustment	Signal generator Remote control unit		WdR WdG WdB	<ol style="list-style-type: none"> Receive a black & white signal. Select WdR, WdG and WdB with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. Adjust WdR, WdG and WdB with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key. Press the MENU key and memorize the set value.
COLOUR CUTOFF LEVEL adjustment	Signal generator Remote control unit		CuR CuG CuB	<ol style="list-style-type: none"> Receive a cross-hatch signal. Select CuR, CuG and CuB with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. Adjust CuR, CuG and CuB with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key and set the values of these items as 64 (constant). Press the MENU key and memorize the set value.
PAL Y DELAY adjustment	Signal generator Remote control unit		YDP	<ol style="list-style-type: none"> Receive a PAL COLOUR BAR. Select YDP with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. Adjust YDP by pressing with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till the colour transients on the colour bar pattern becomes as sharper and possible as colours between transients do not mix with each other. Press the MENU key and memorize the set value.
SECAM Y DELAY adjustment	Signal generator Remote control unit		YDS	<ol style="list-style-type: none"> Receive a SECAM COLOUR BAR test pattern. Select YDS with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. Adjust YDS by pressing with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till the colour transients on the colour bar pattern becomes as sharper and possible as colours between transients do not mix with each other. Press the MENU key and memorize the set value.
NTSC Y DELAY adjustment	Signal generator Remote control unit		YDN	<ol style="list-style-type: none"> Receive a NTSC COLOUR BAR test pattern from an external source (e.g. EXT 1). Select YDN with the UP/DOWN ($\blacktriangle/\blacktriangledown$) key. Adjust YDN by pressing with the LEFT/RIGHT ($\blacktriangleleft/\blacktriangleright$) key till the colour transients on the colour bar pattern becomes as sharper and possible as colours between transients do not mix with each other. Press the MENU key and memorize the set value.

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

[MEMO]


JVC

SCHEMATIC DIAGRAMS

COLOUR TELEVISION

**AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB**

CD-ROM No.SML200204

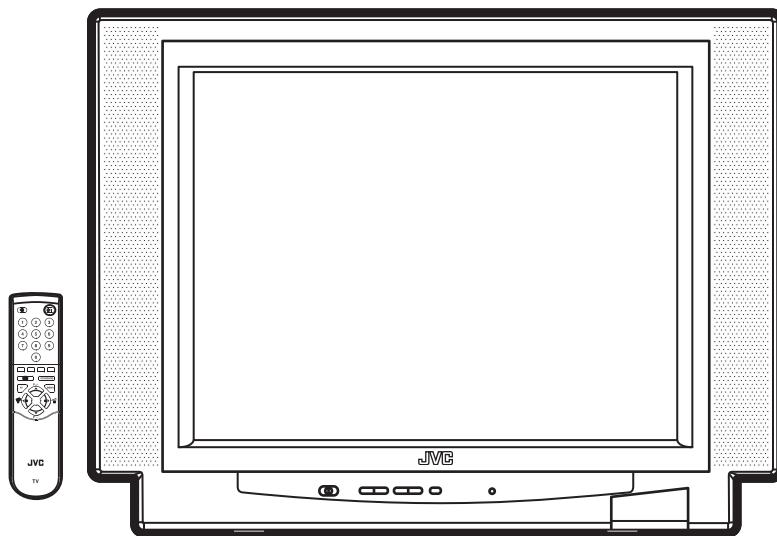

CONTENTS

■ NOTE ON USING CIRCUIT DIAGRAMS -----	2-1
■ SEMICONDUCTOR SHAPES -----	2-2
■ BLOCK DIAGRAM -----	2-3
■ CIRCUIT DIAGRAMS -----	2-5
■ PATTERN DIAGRAMS -----	2-19

CONTENTS

SEMICONDUCTOR SHAPES ----- 2-2

BLOCK DIAGRAM ----- 2-3

CIRCUIT DIAGRAMS


MAIN PWB CIRCUIT DIAGRAM -----	2-5
MULTI SOUND PWB CIRCUIT DIAGRAM -----	2-11
FEATURE BOX PWB CIRCUIT DIAGRAM -----	2-13
CRT SOCKET PWB CIRCUIT DIAGRAM -----	2-15
FRONT AV + HEADPHONE JACK PWB CIRCUIT DIAGRAM -----	2-17
FRONT CONTROL PWB CIRCUIT DIAGRAM -----	2-18

PATTERN DIAGRAMS


MAIN PWB PATTERN -----	2-19
MULTI SOUND PWB PATTERN -----	2-21
FEATURE BOX PWB PATTERN -----	2-23
CRT SOCKET PWB PATTERN & FRONT CONTROL PWB PATTERN -----	2-25
FRONT AV + HEADPHONE JACK PWB PATTERN -----	2-26

SEMICONDUCTOR SHAPES


TRANSISTOR

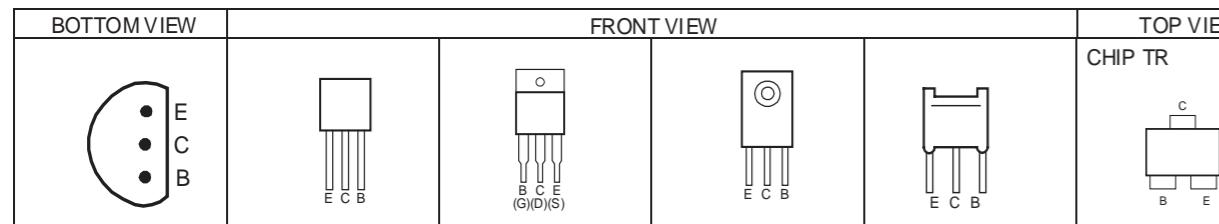

IC

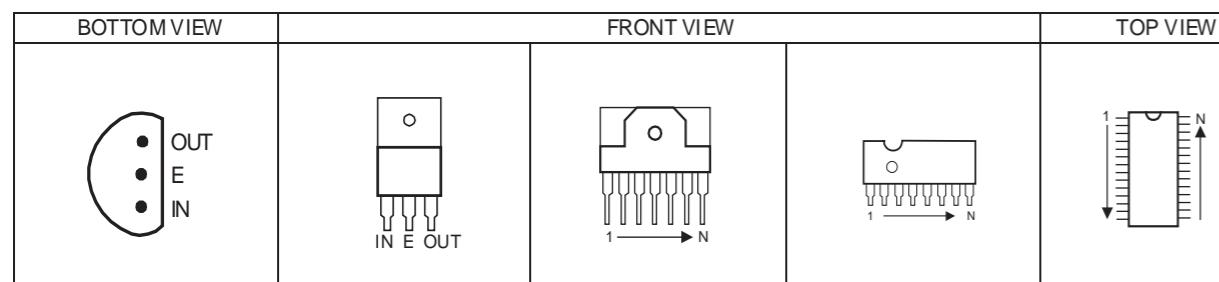

CHIP IC

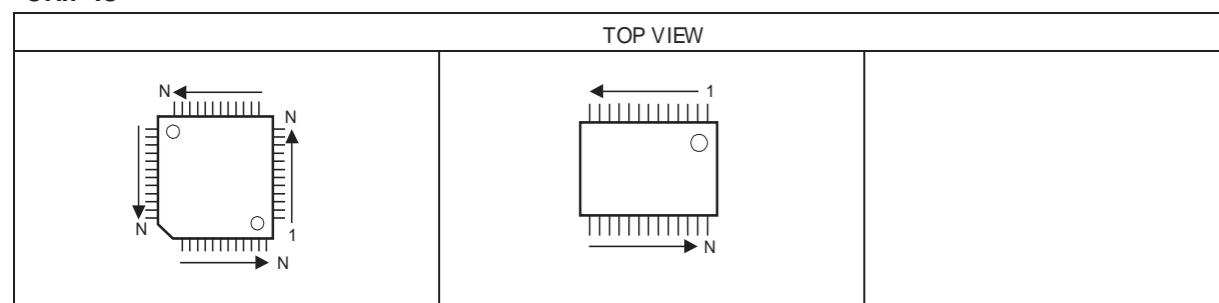

AV28BH7ENS / AV28BH7ENB AV28BH7EPS / AV28BH7EPB AV28BH7EES / AV28BH7EEB

STANDARD CIRCUIT DIAGRAM

■ NOTE ON USING CIRCUIT DIAGRAMS

1.SAFETY

The components identified by the \triangle symbol and shading are critical for safety. For continued safety replace safety critical components only with manufacturers recommended parts.

2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1)Input signal : Colour bar signal
- (2)Setting positions of each knob/button and variable resistor : Original setting position when shipped
- (3)Internal resistance of tester :DC 20k Ω /V
- (4)Oscilloscope sweeping time :H \Rightarrow 20 μ s/div
:V \Rightarrow 5ms/div
:Others \Rightarrow Sweeping time is specified
- (5)Voltage values :All DC voltage values

* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3.INDICATIONS ON THE CIRCUIT DIAGRAM

(1)Resistors

● Resistance value

No unit	:[Ω]
K	:[K Ω]
M	:[M Ω]

● Type

No indication	:Carbon resistor
OMR	:Oxide metal film resistor
MFR	:Metal film resistor
MPR	:Metal plate resistor
UNFR	:Uninflammable resistor
FR	:Fusible resistor

* Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2)Capacitors

● Capacitance value

1 or higher	:[pF]
less than 1	:[μ F]

● Withstand voltage

No indication	:DC50[V]
Others	:DC withstand voltage [V]
AC indicated	:AC withstand voltage [V]

* Electrolytic Capacitors

47/50[Example]:Capacitance value [μ F]/withstand voltage[V]

● Type

No indication	:Ceramic capacitor
MM	:Metallized mylar capacitor
PP	:Polypropylene capacitor
MPP	:Metallized polypropylene capacitor
MF	:Metallized film capacitor
TF	:Thin film capacitor
BP	:Bipolar electrolytic capacitor
TAN	:Tantalum capacitor

(3)Coils

No unit	:[μ H]
Others	:As specified

4.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE side GND and the ISOLATED(NEUTRAL) side GND. Therefore, care must be taken for the following points.

(1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. If the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.

(2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected , a fuse or any parts will be broken.


◇ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

NOTE


◇ Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.

When ordering parts, please use the numbers that appear in the Parts List.


BLOCK DIAGRAM

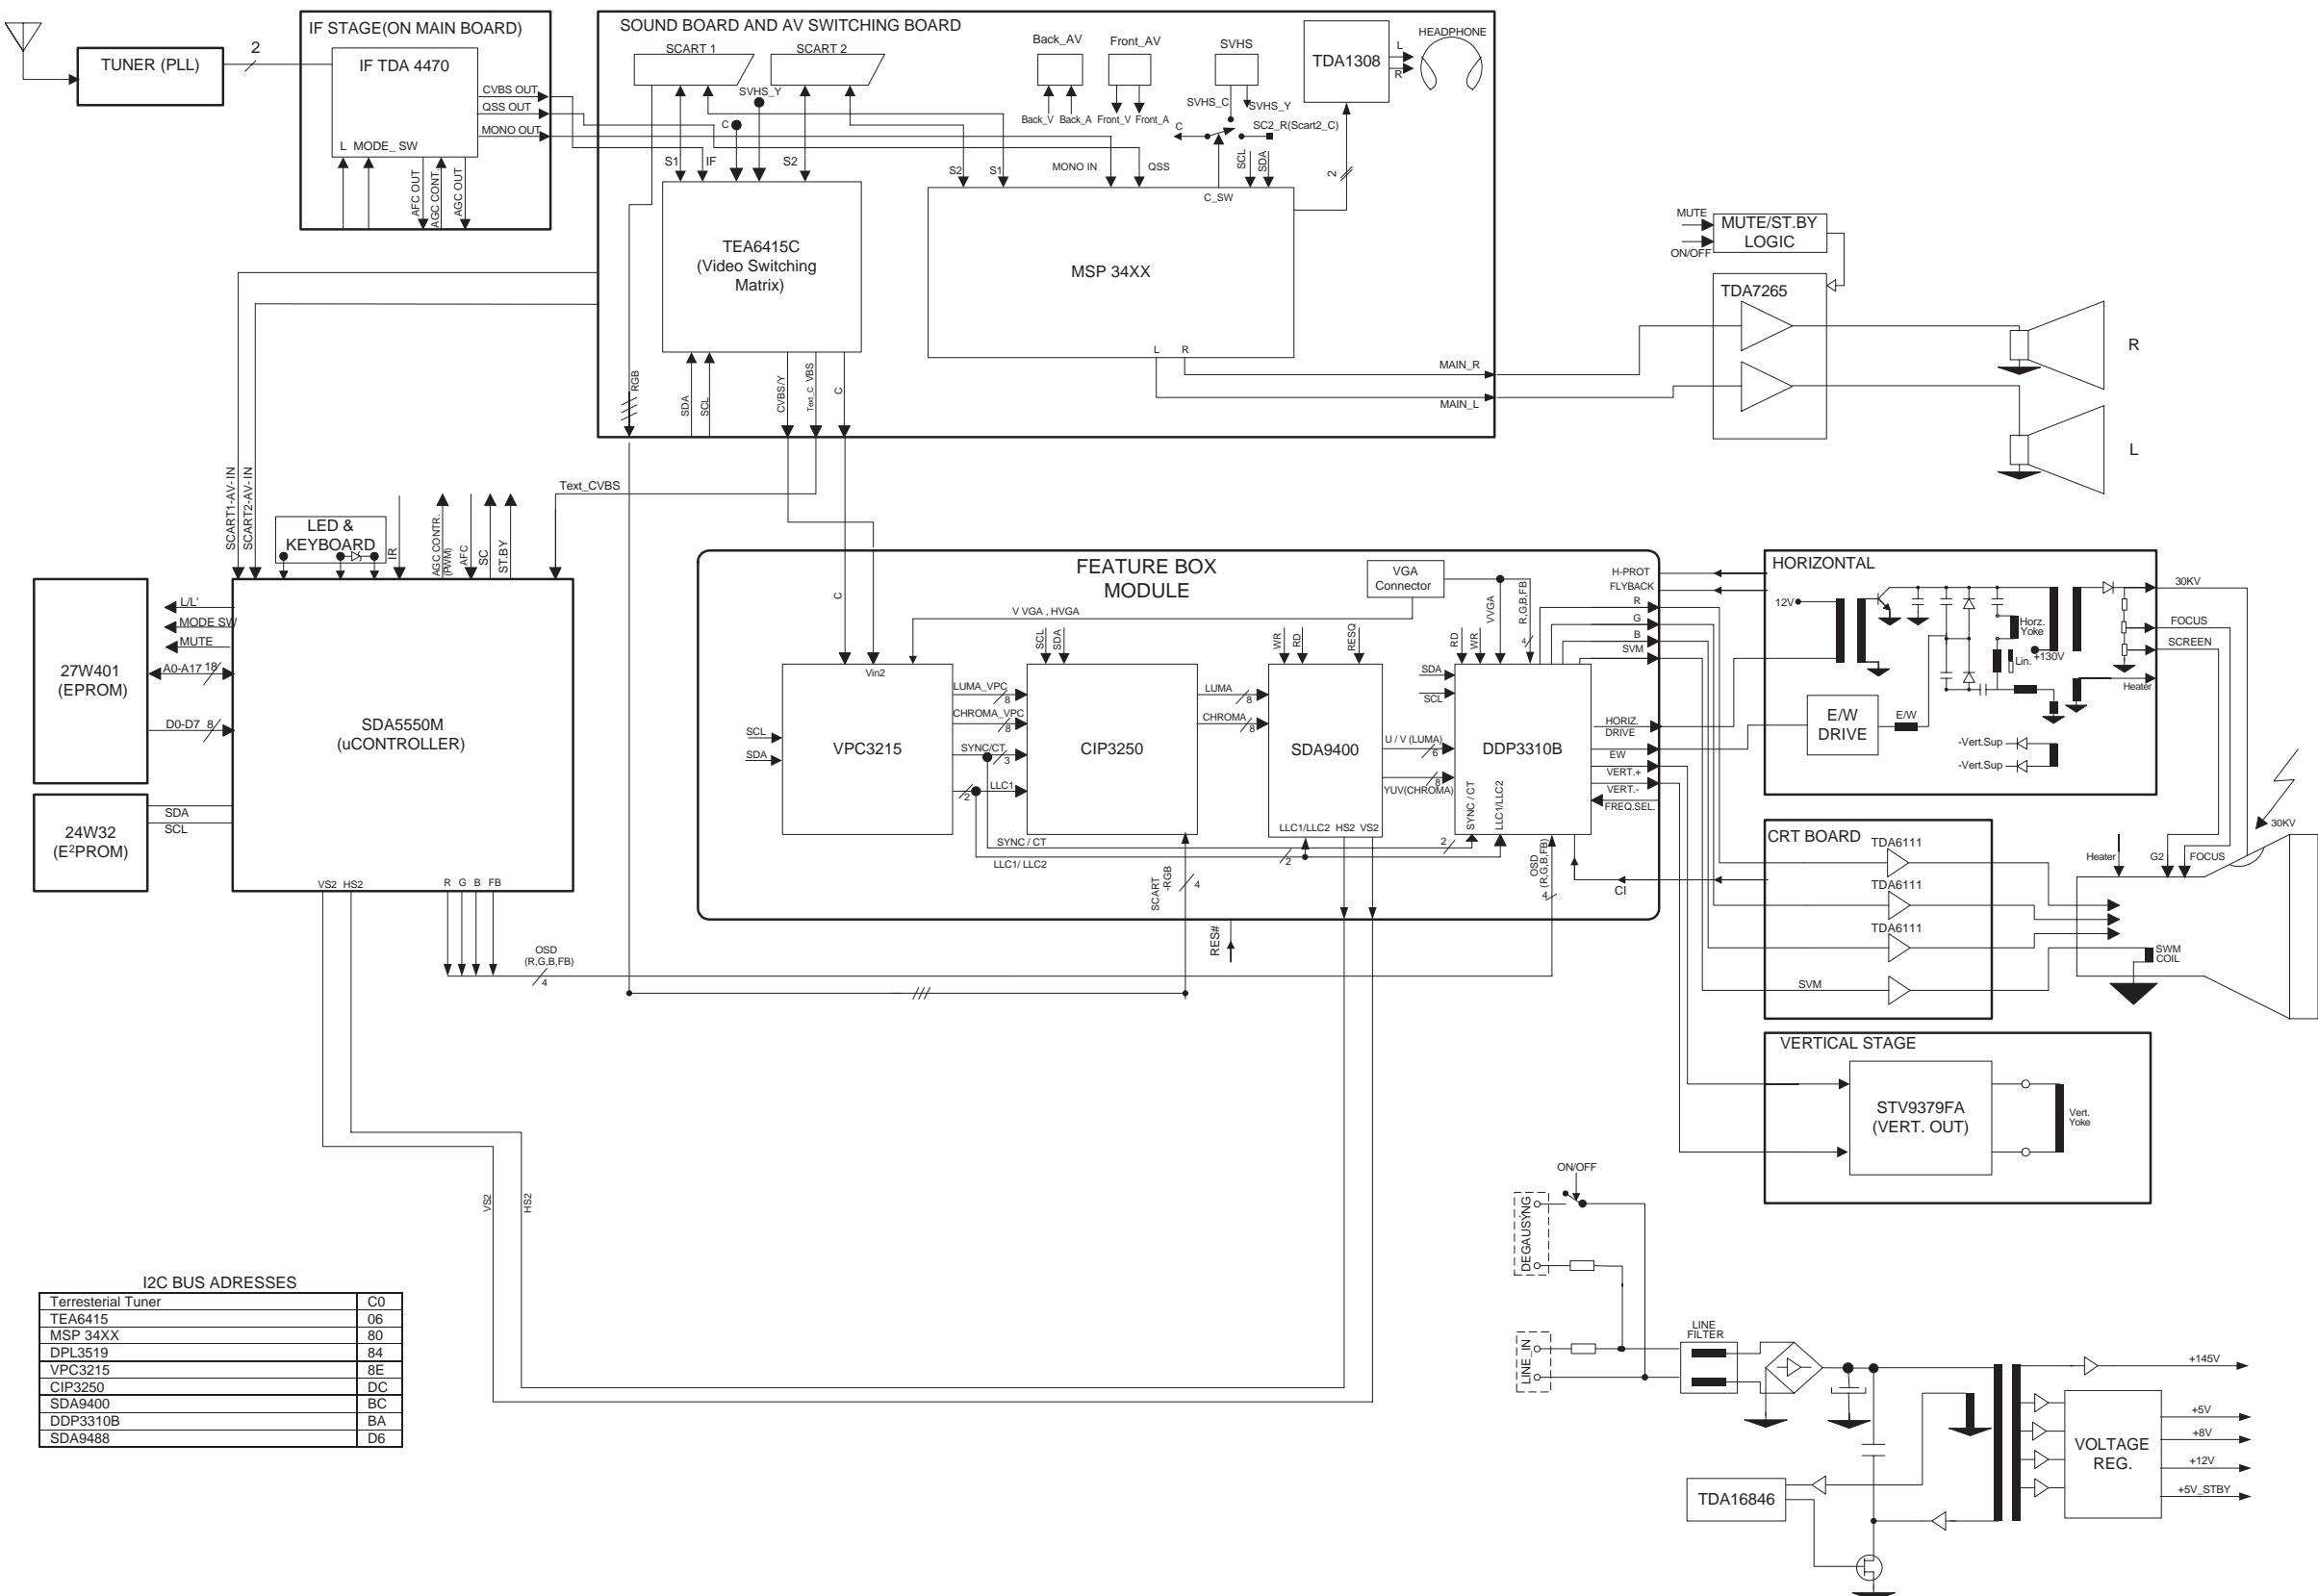


CIRCUIT DIAGRAMS MAIN PWB CIRCUIT DIAGRAM (1/3)

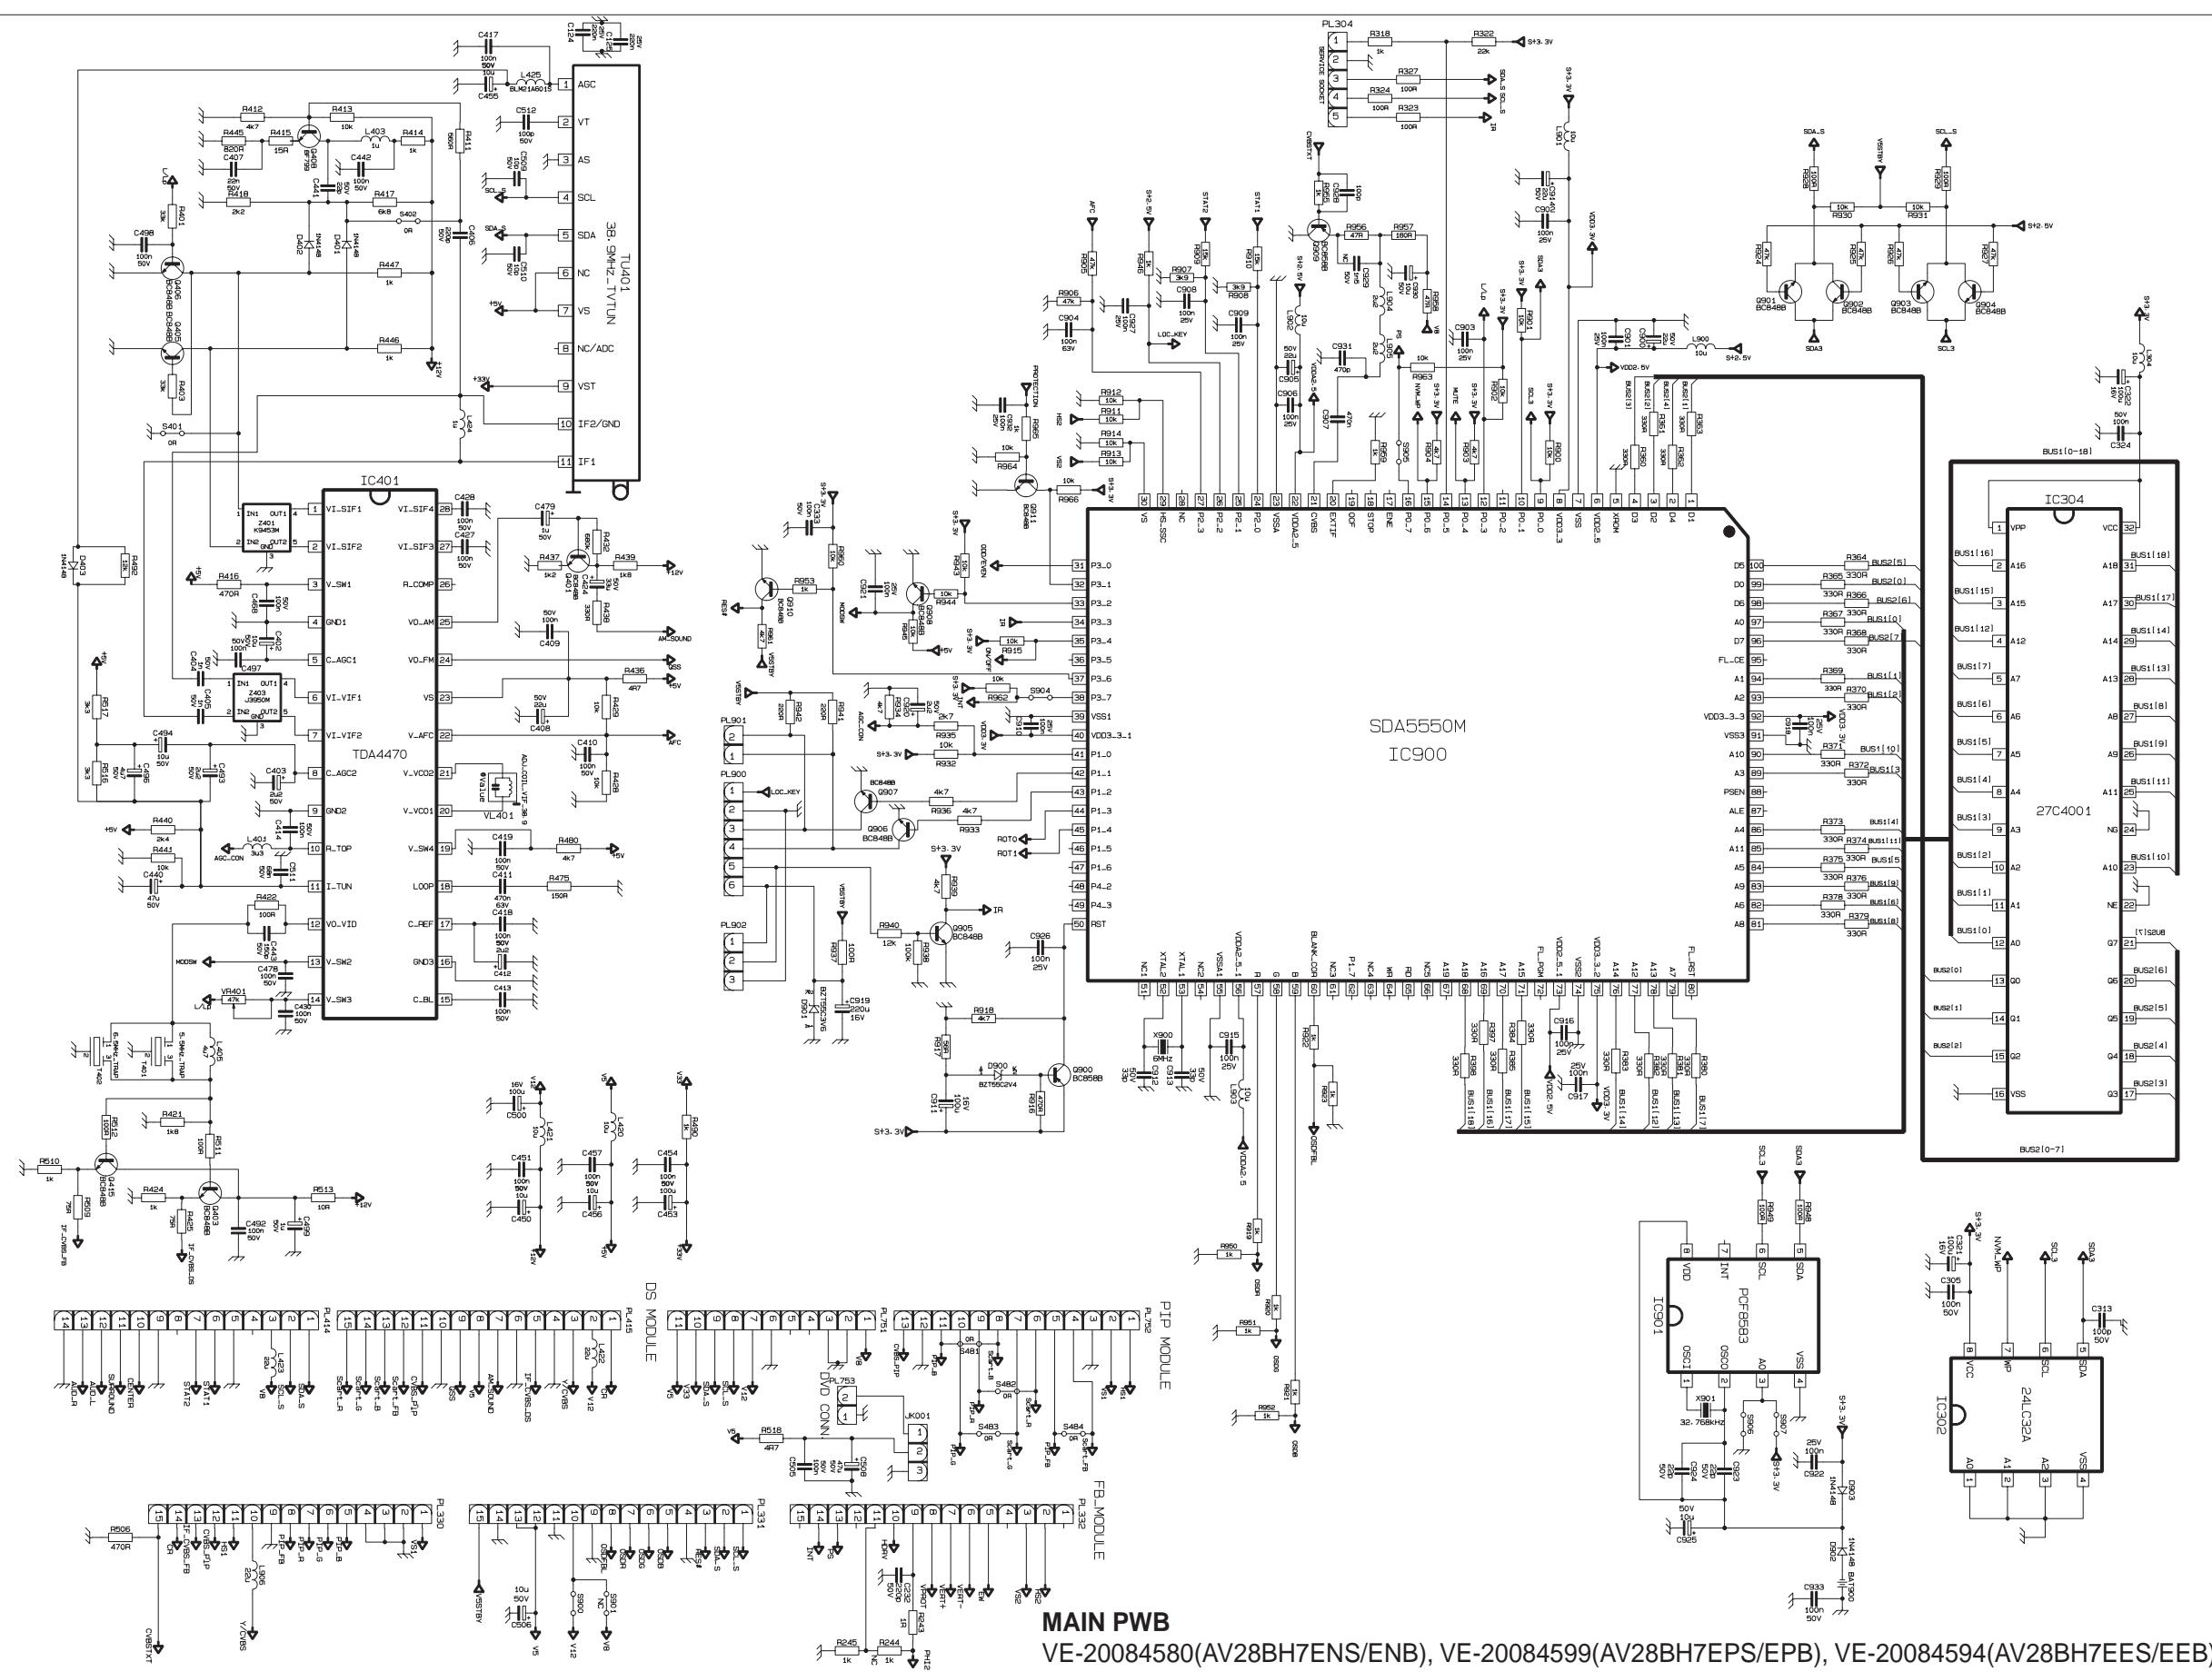


MAIN PWB CIRCUIT DIAGRAM (2/3)

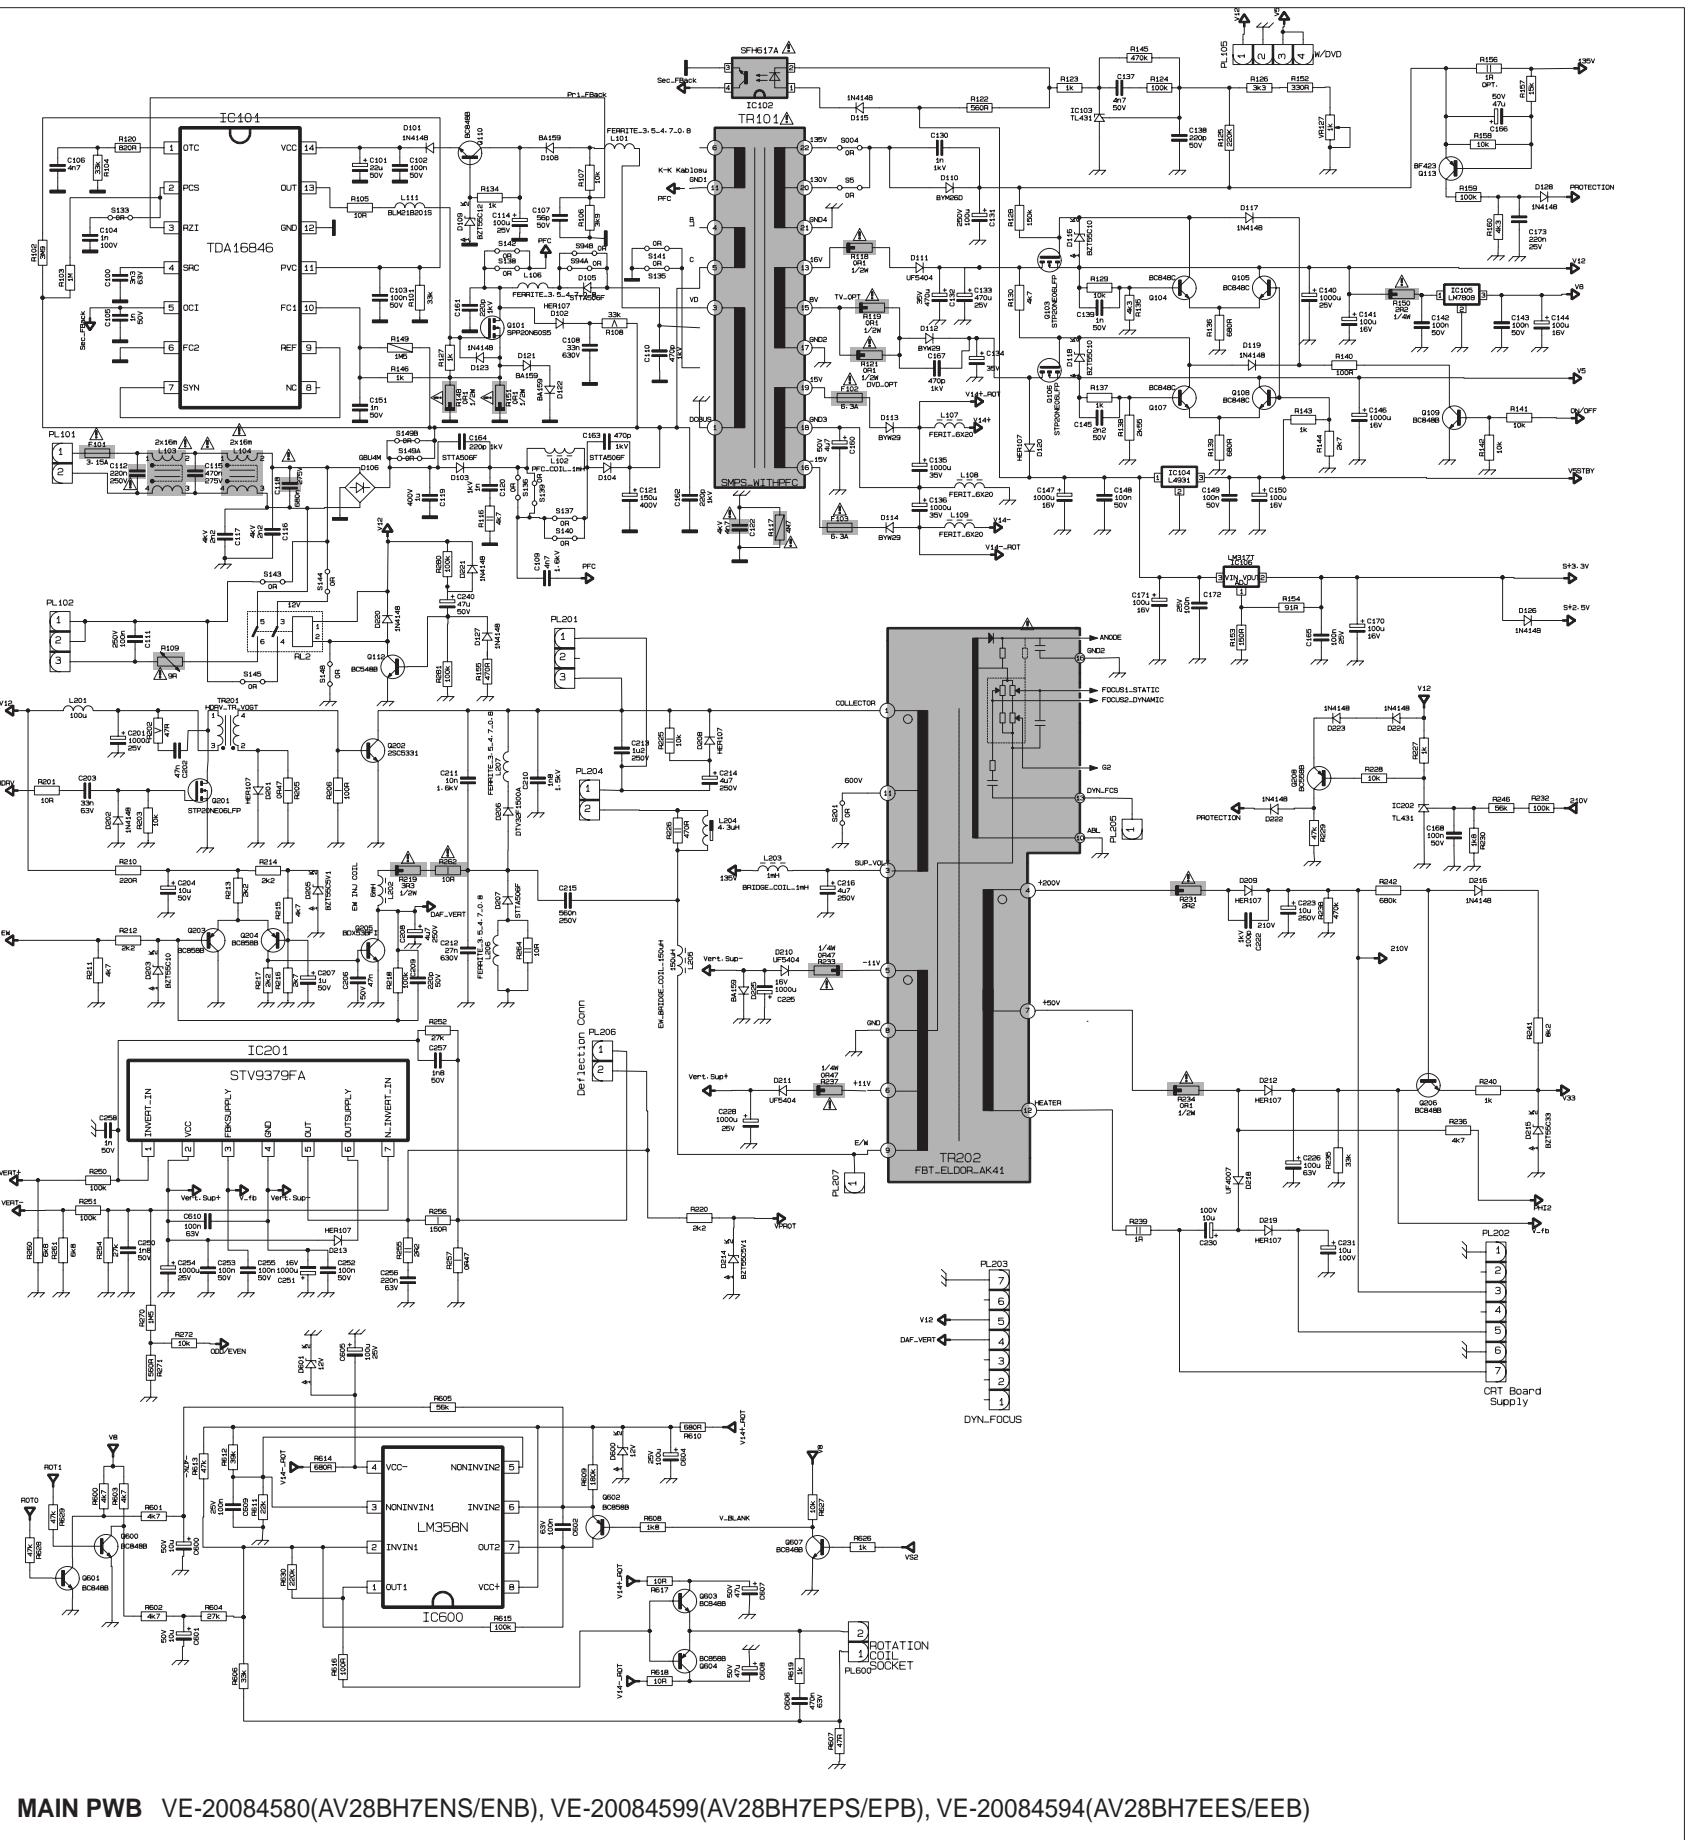

MAIN PWB CIRCUIT DIAGRAM (3/3)

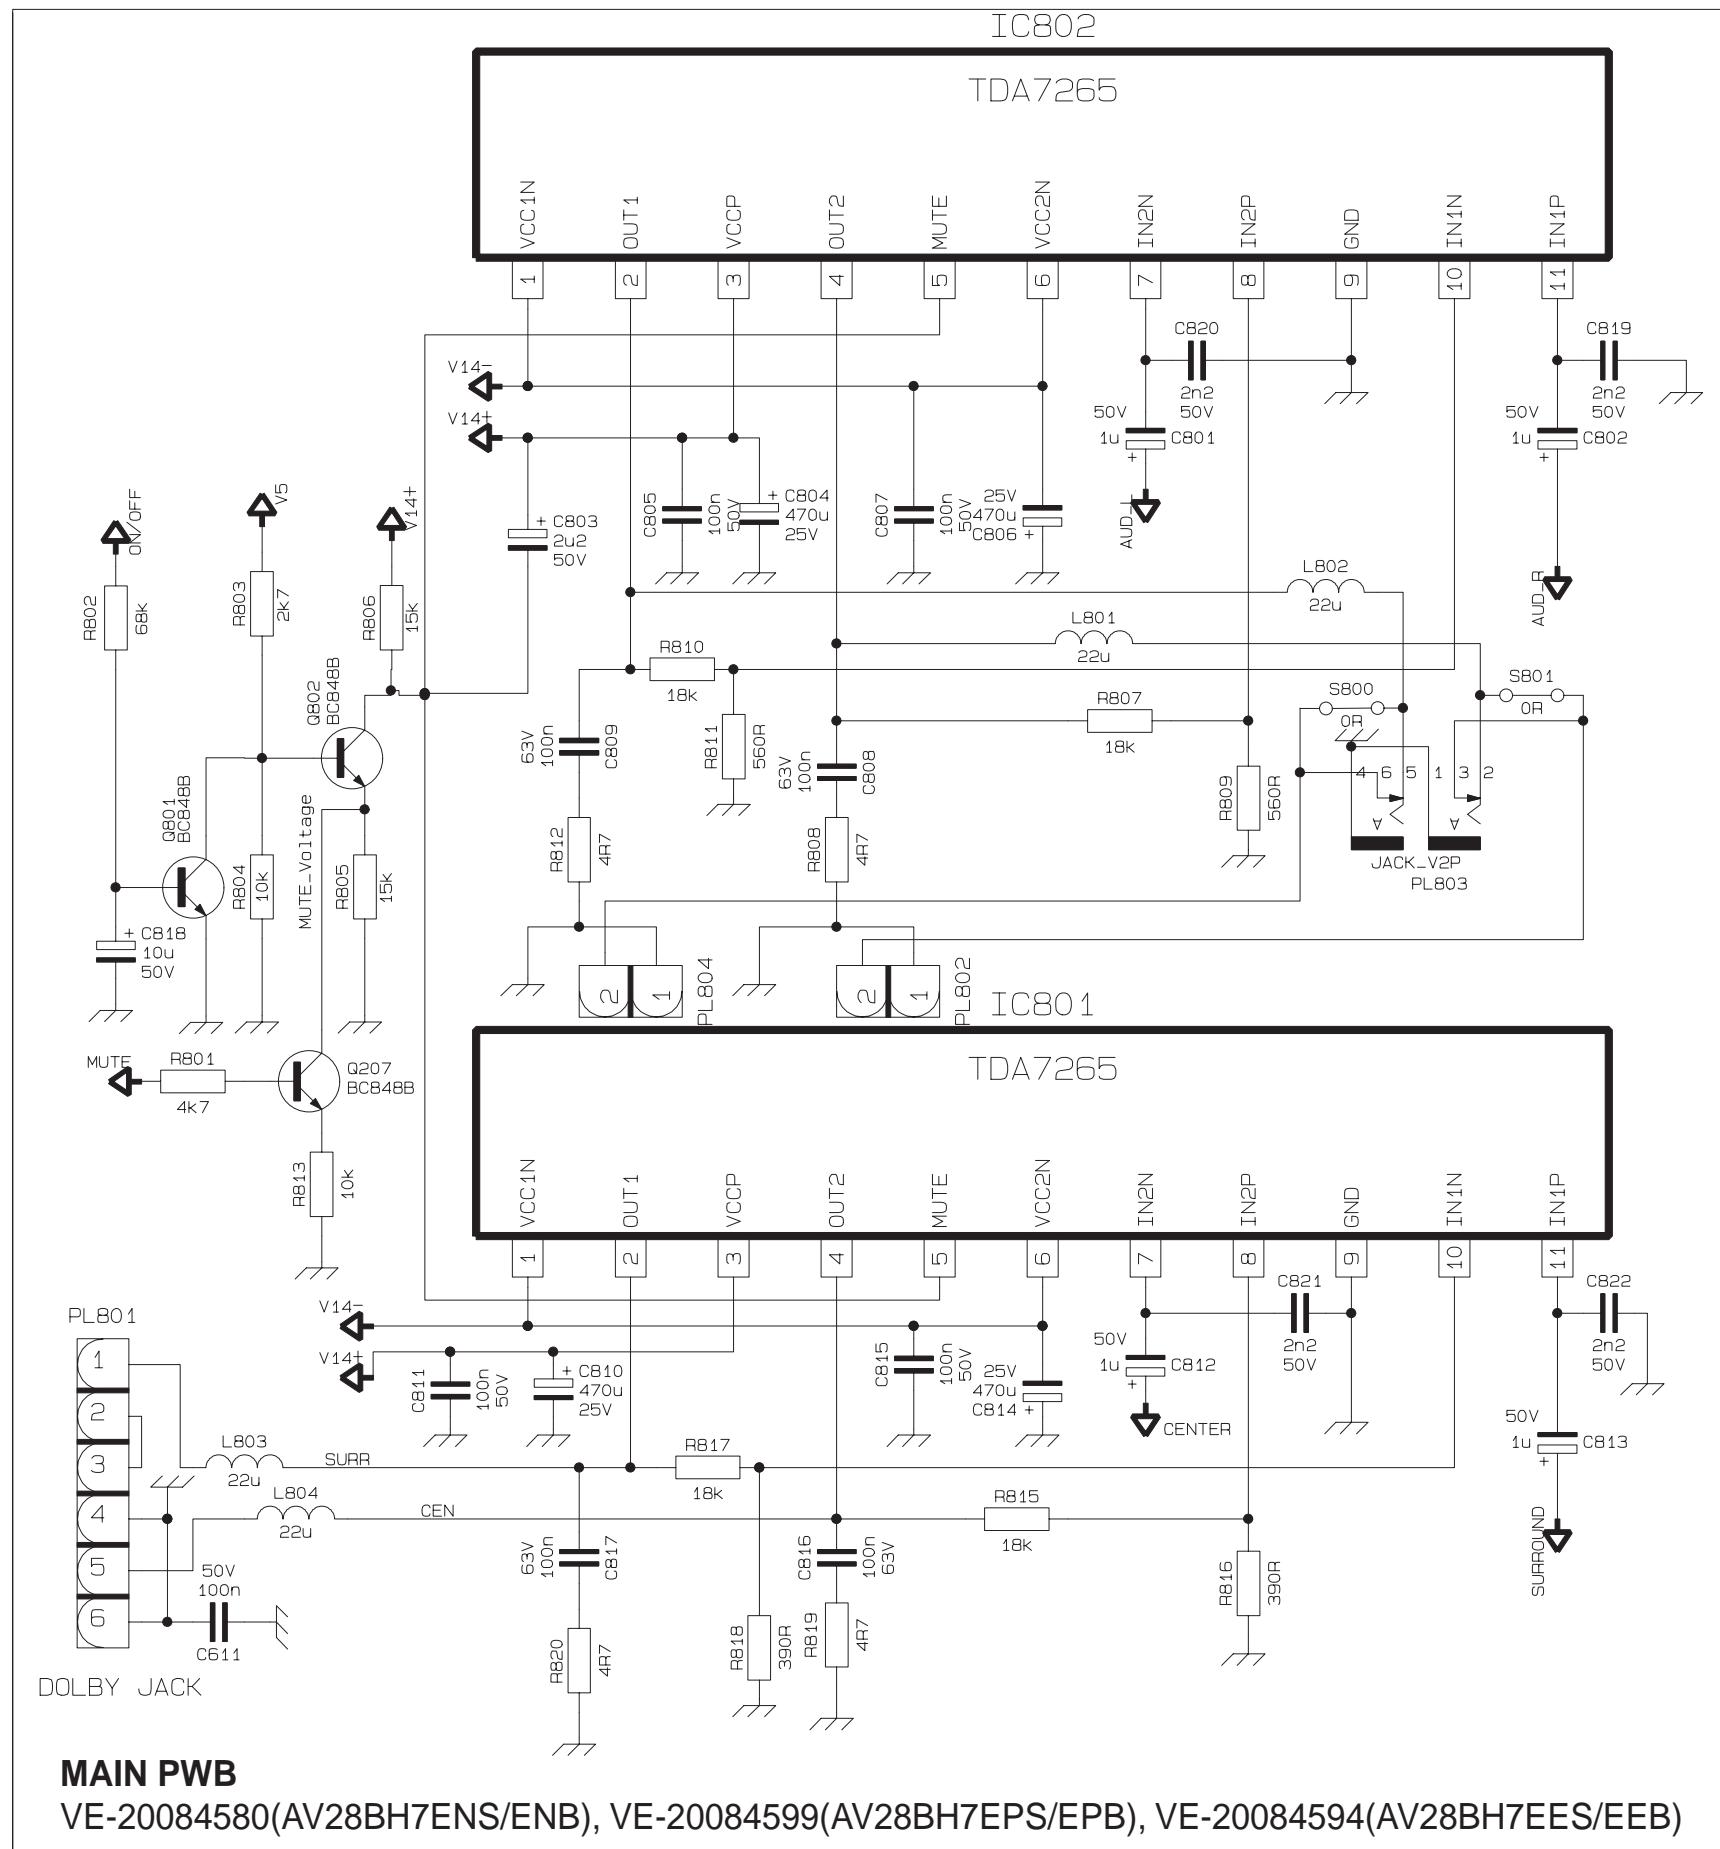


MULTI SOUND PWB CIRCUIT DIAGRAM

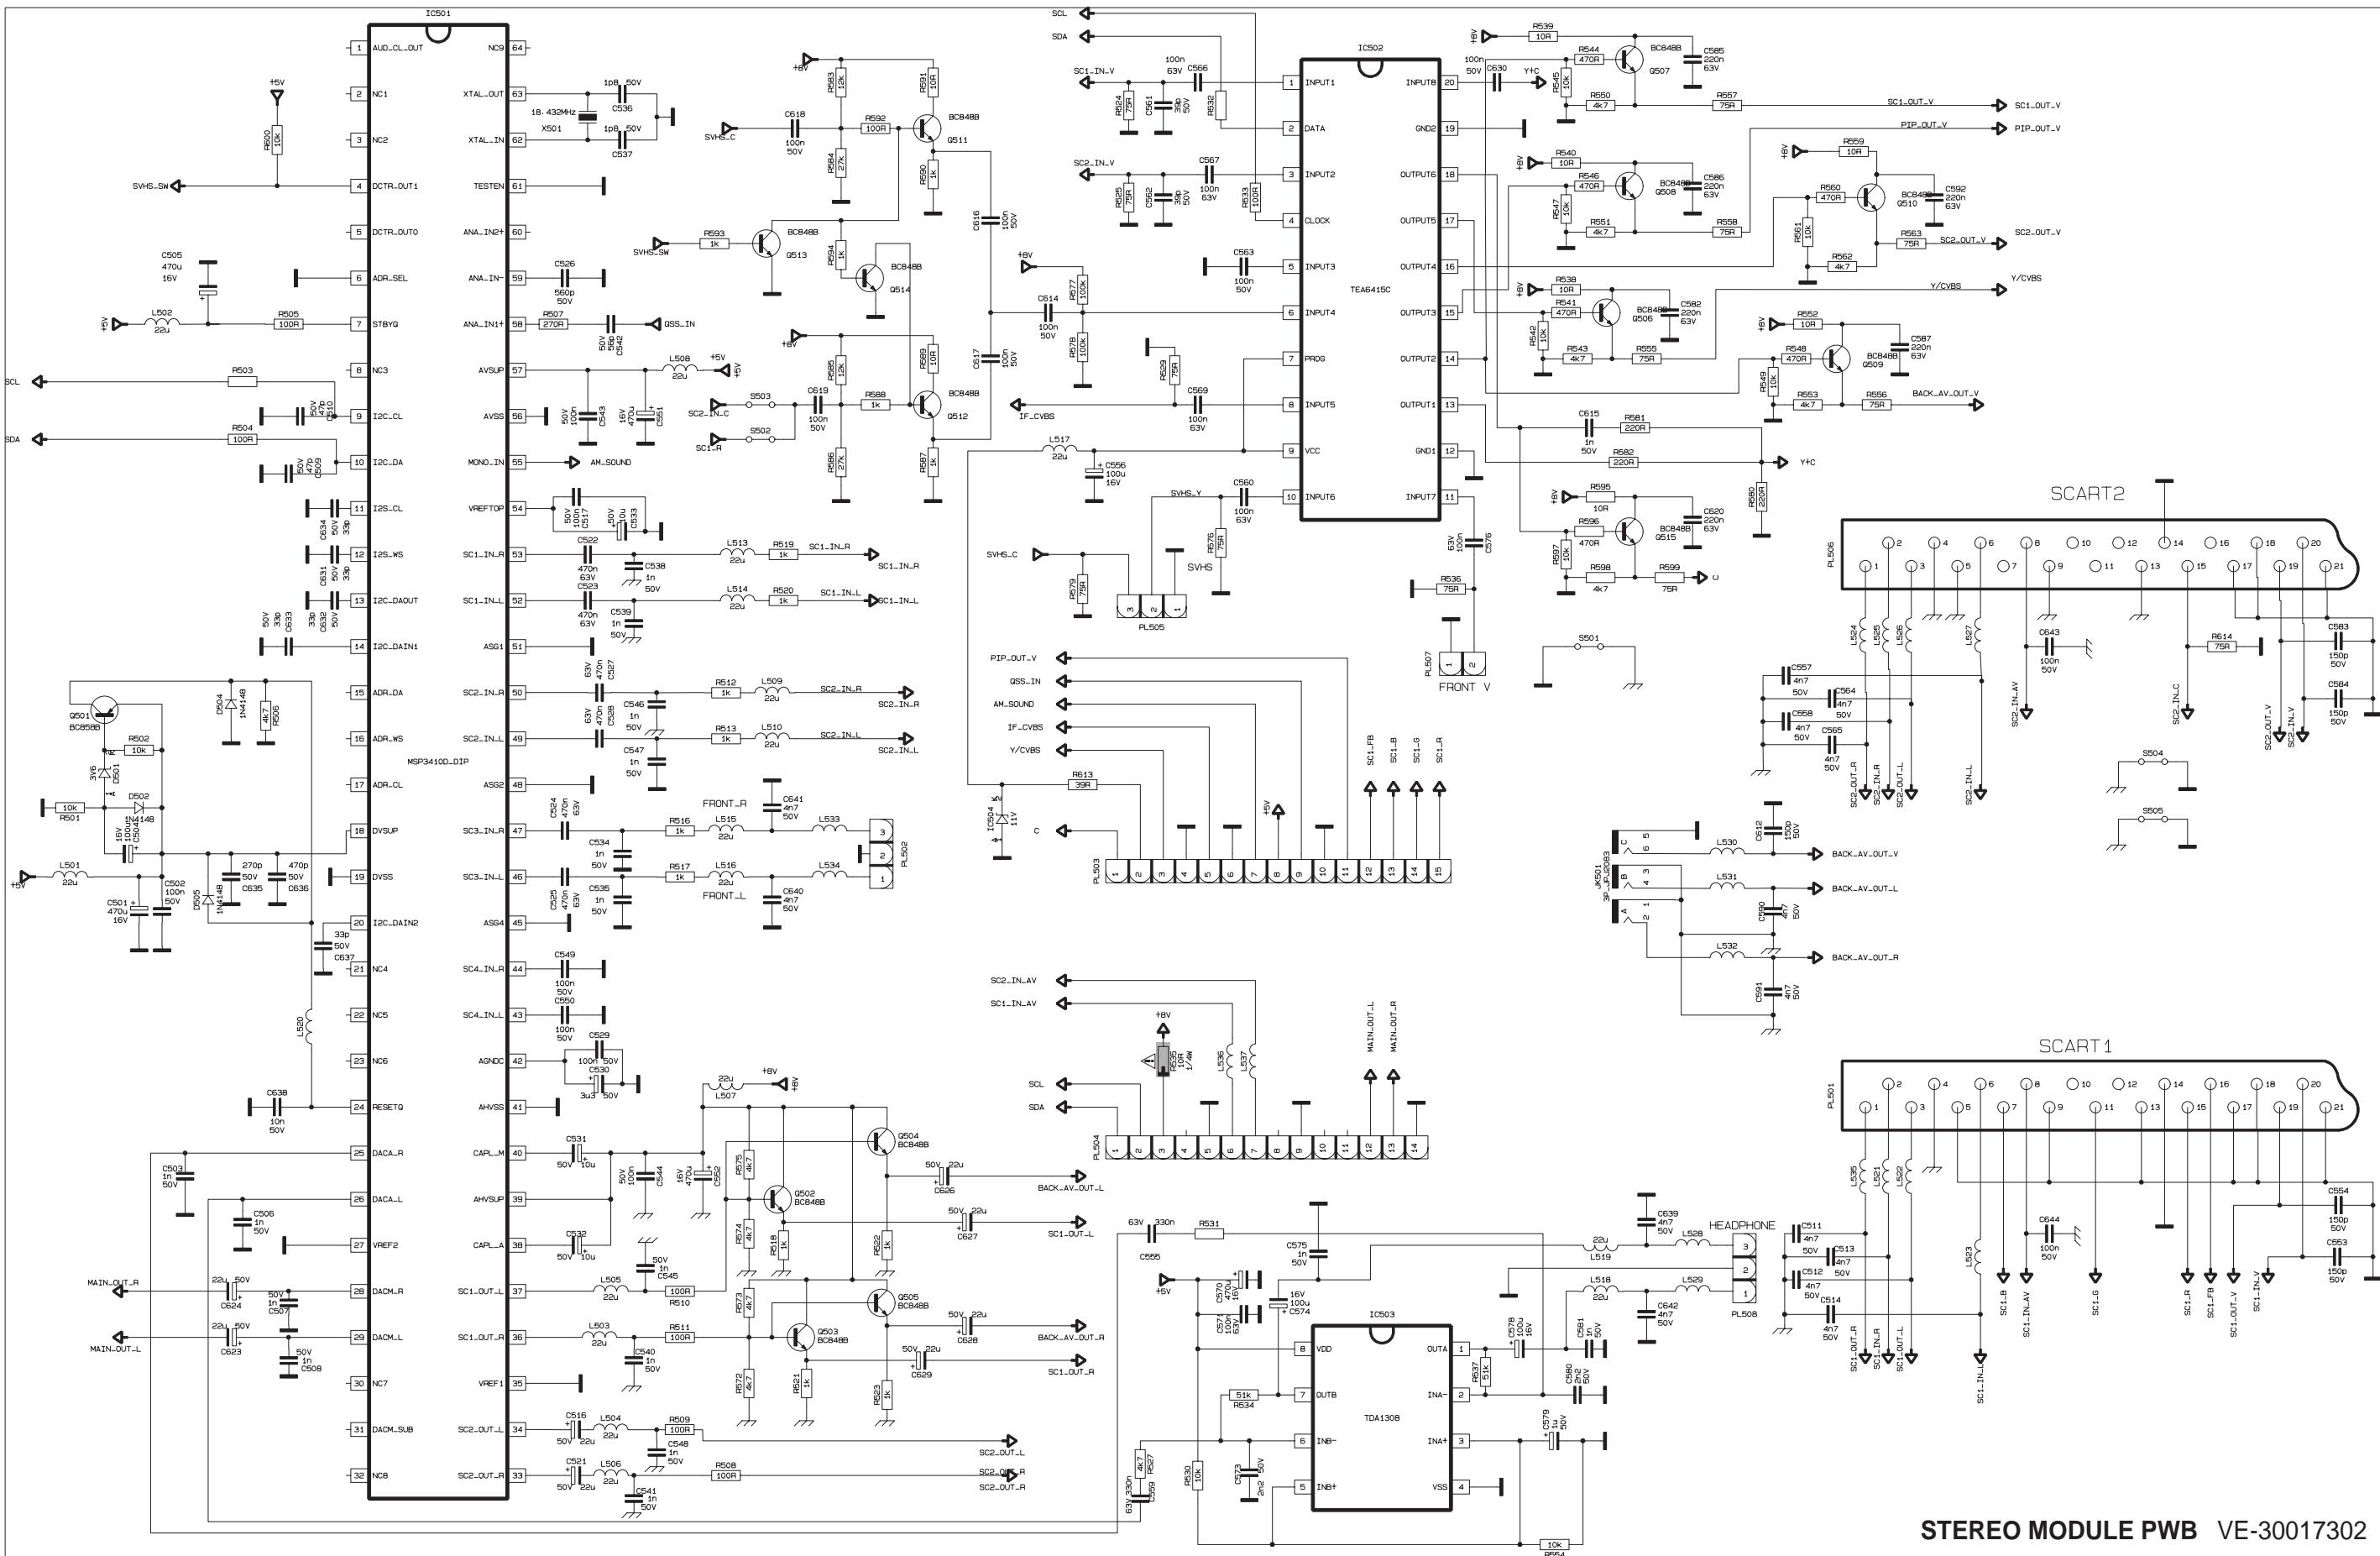

FEATURE BOX PWB CIRCUIT DIAGRAM

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

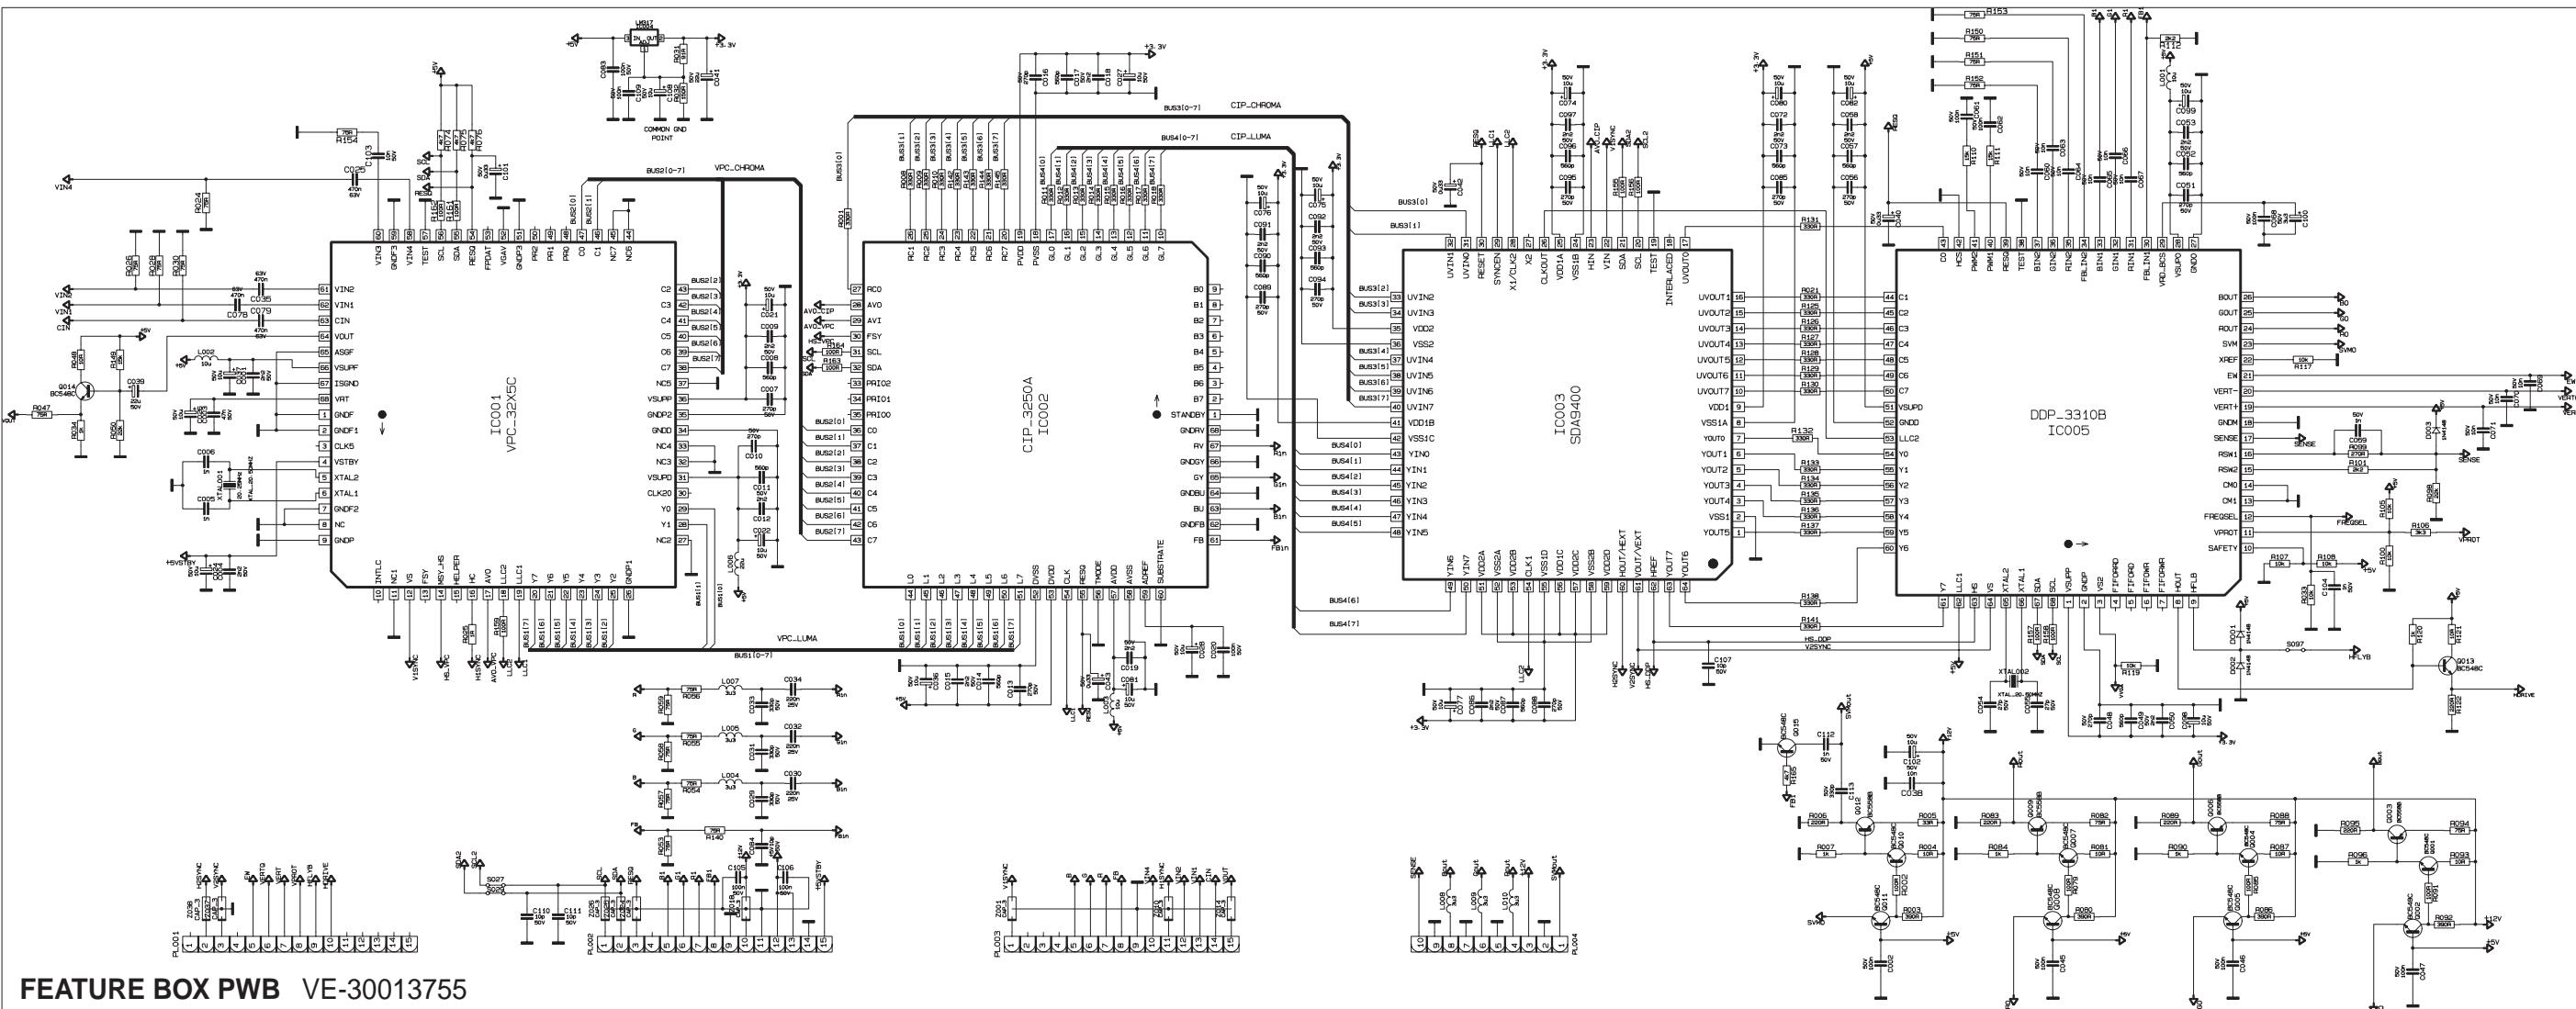


FEATURE BOX PWB VE-30013755

CRT SOCKET PWB CIRCUIT DIAGRAM

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

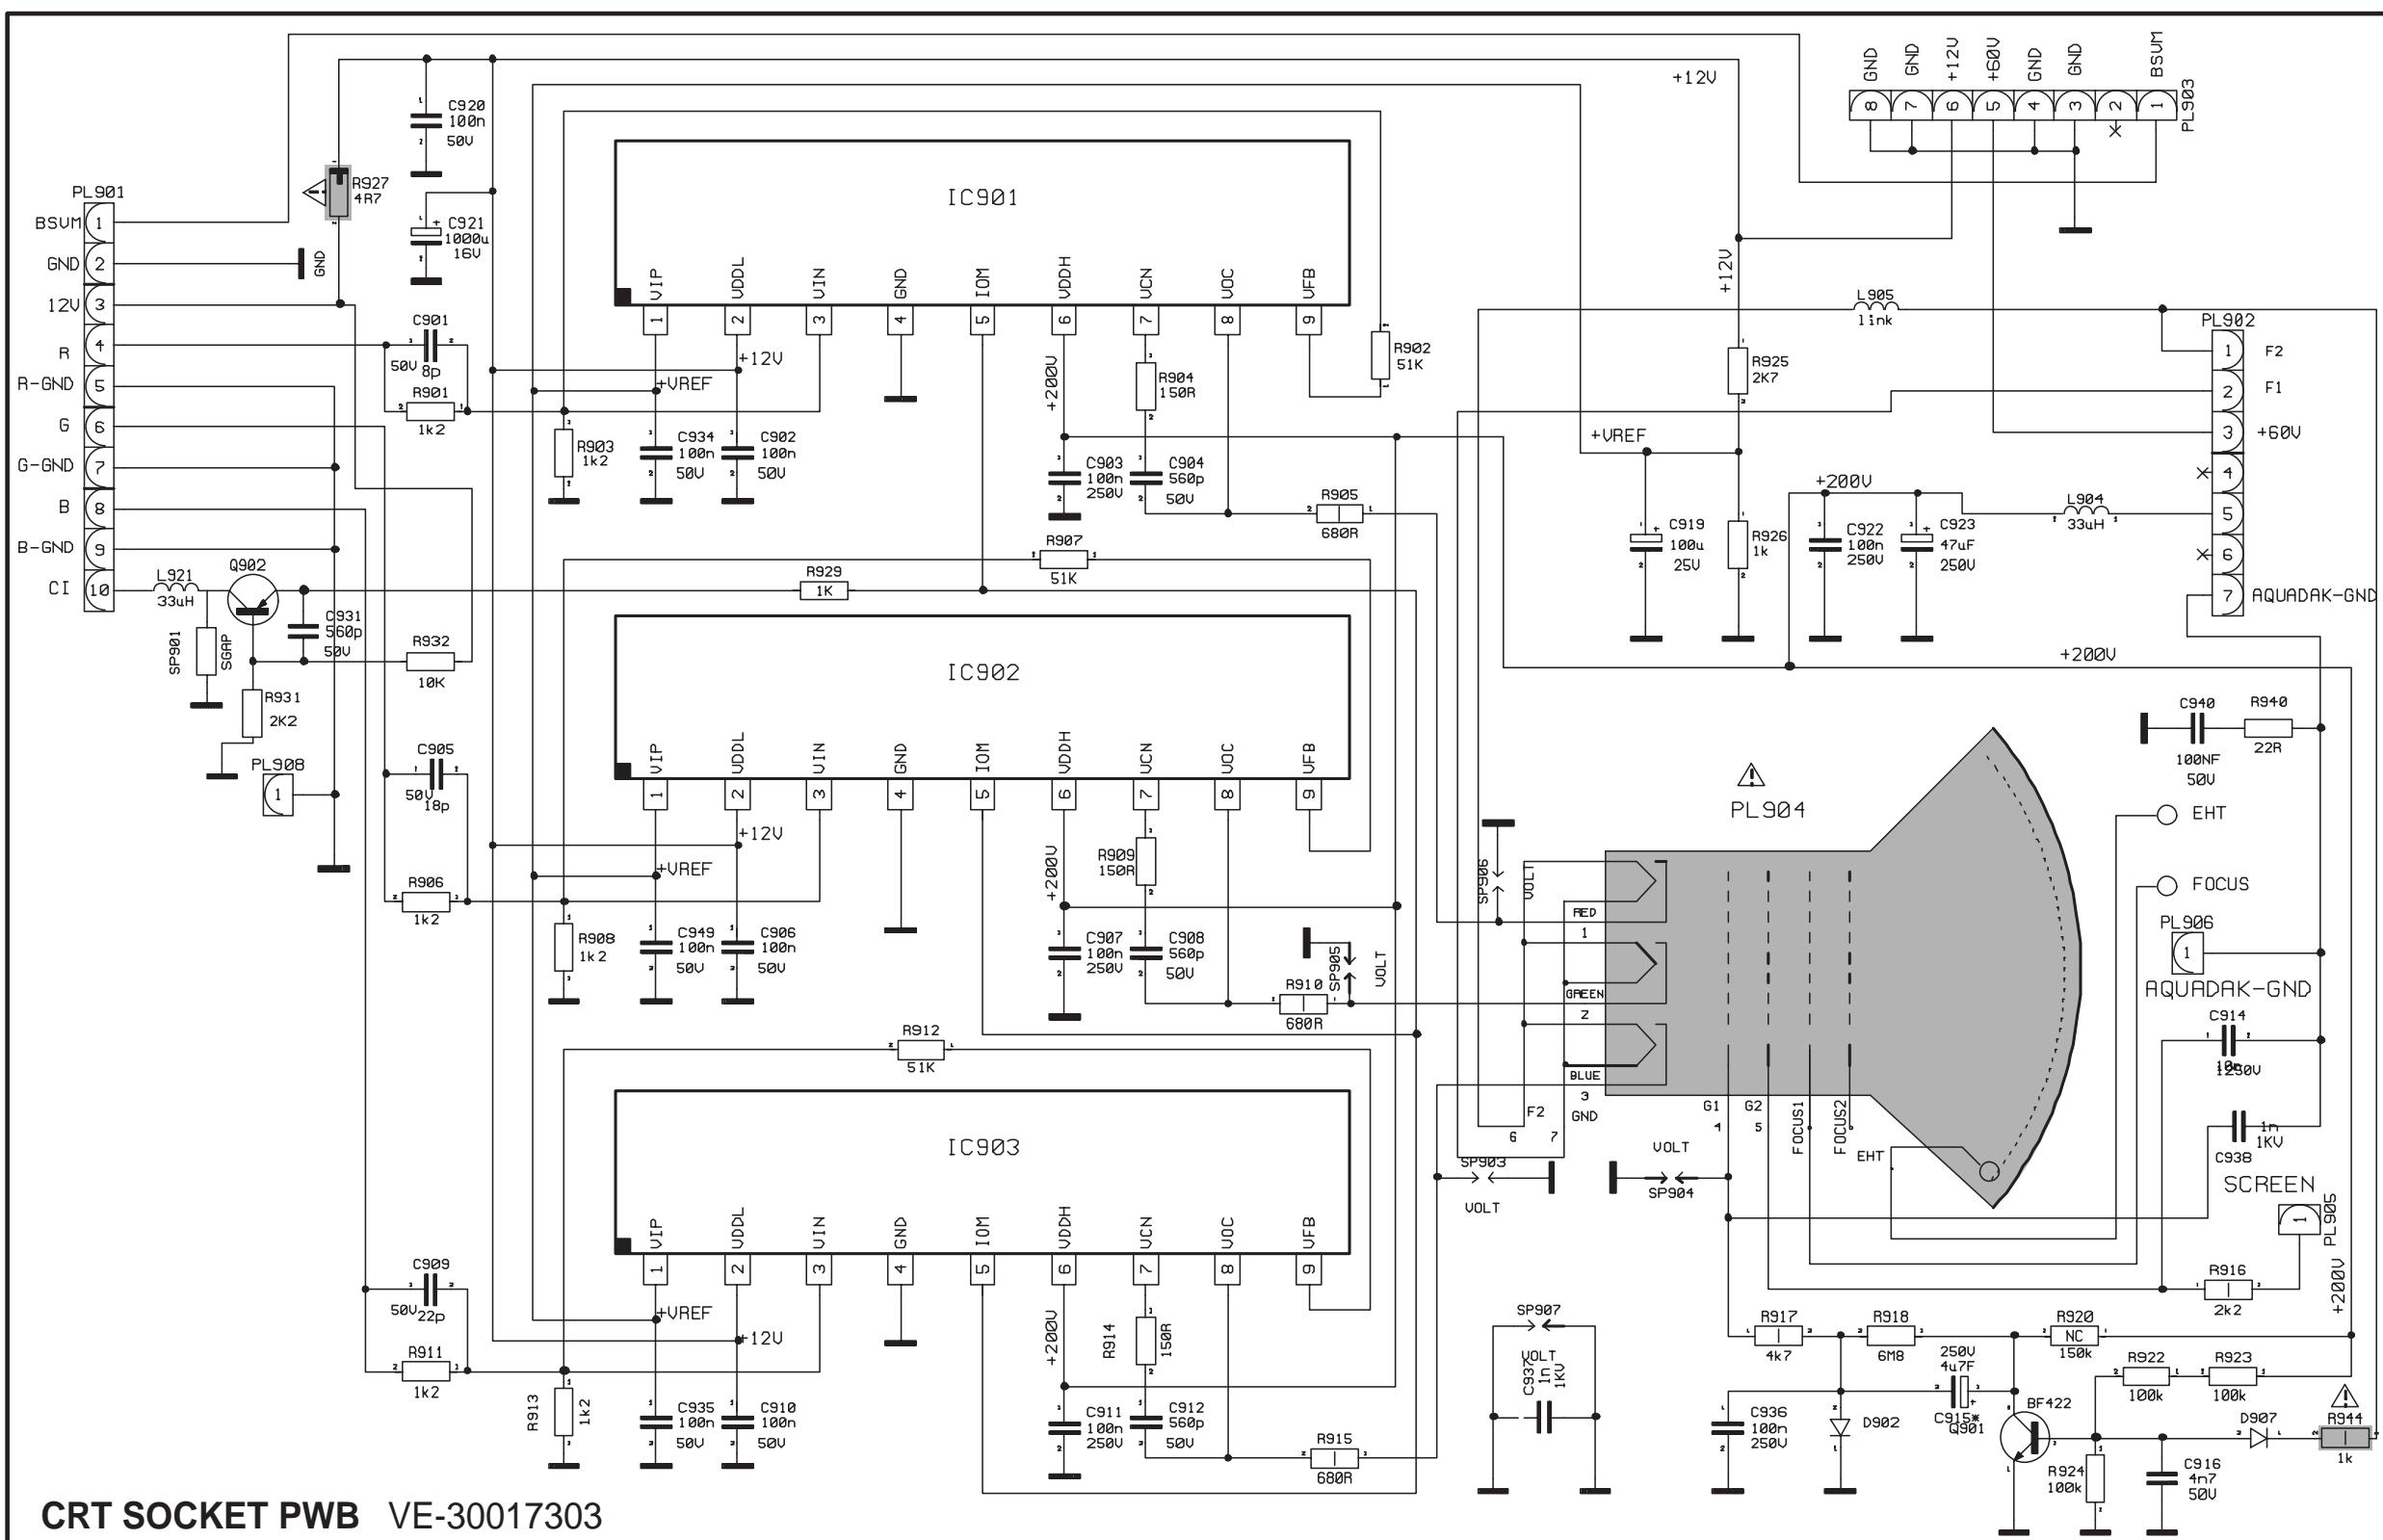


FRONT AV + HEADPHONE JACK PWB CIRCUIT DIAGRAM

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

FRONT CONTROL PWB CIRCUIT DIAGRAM

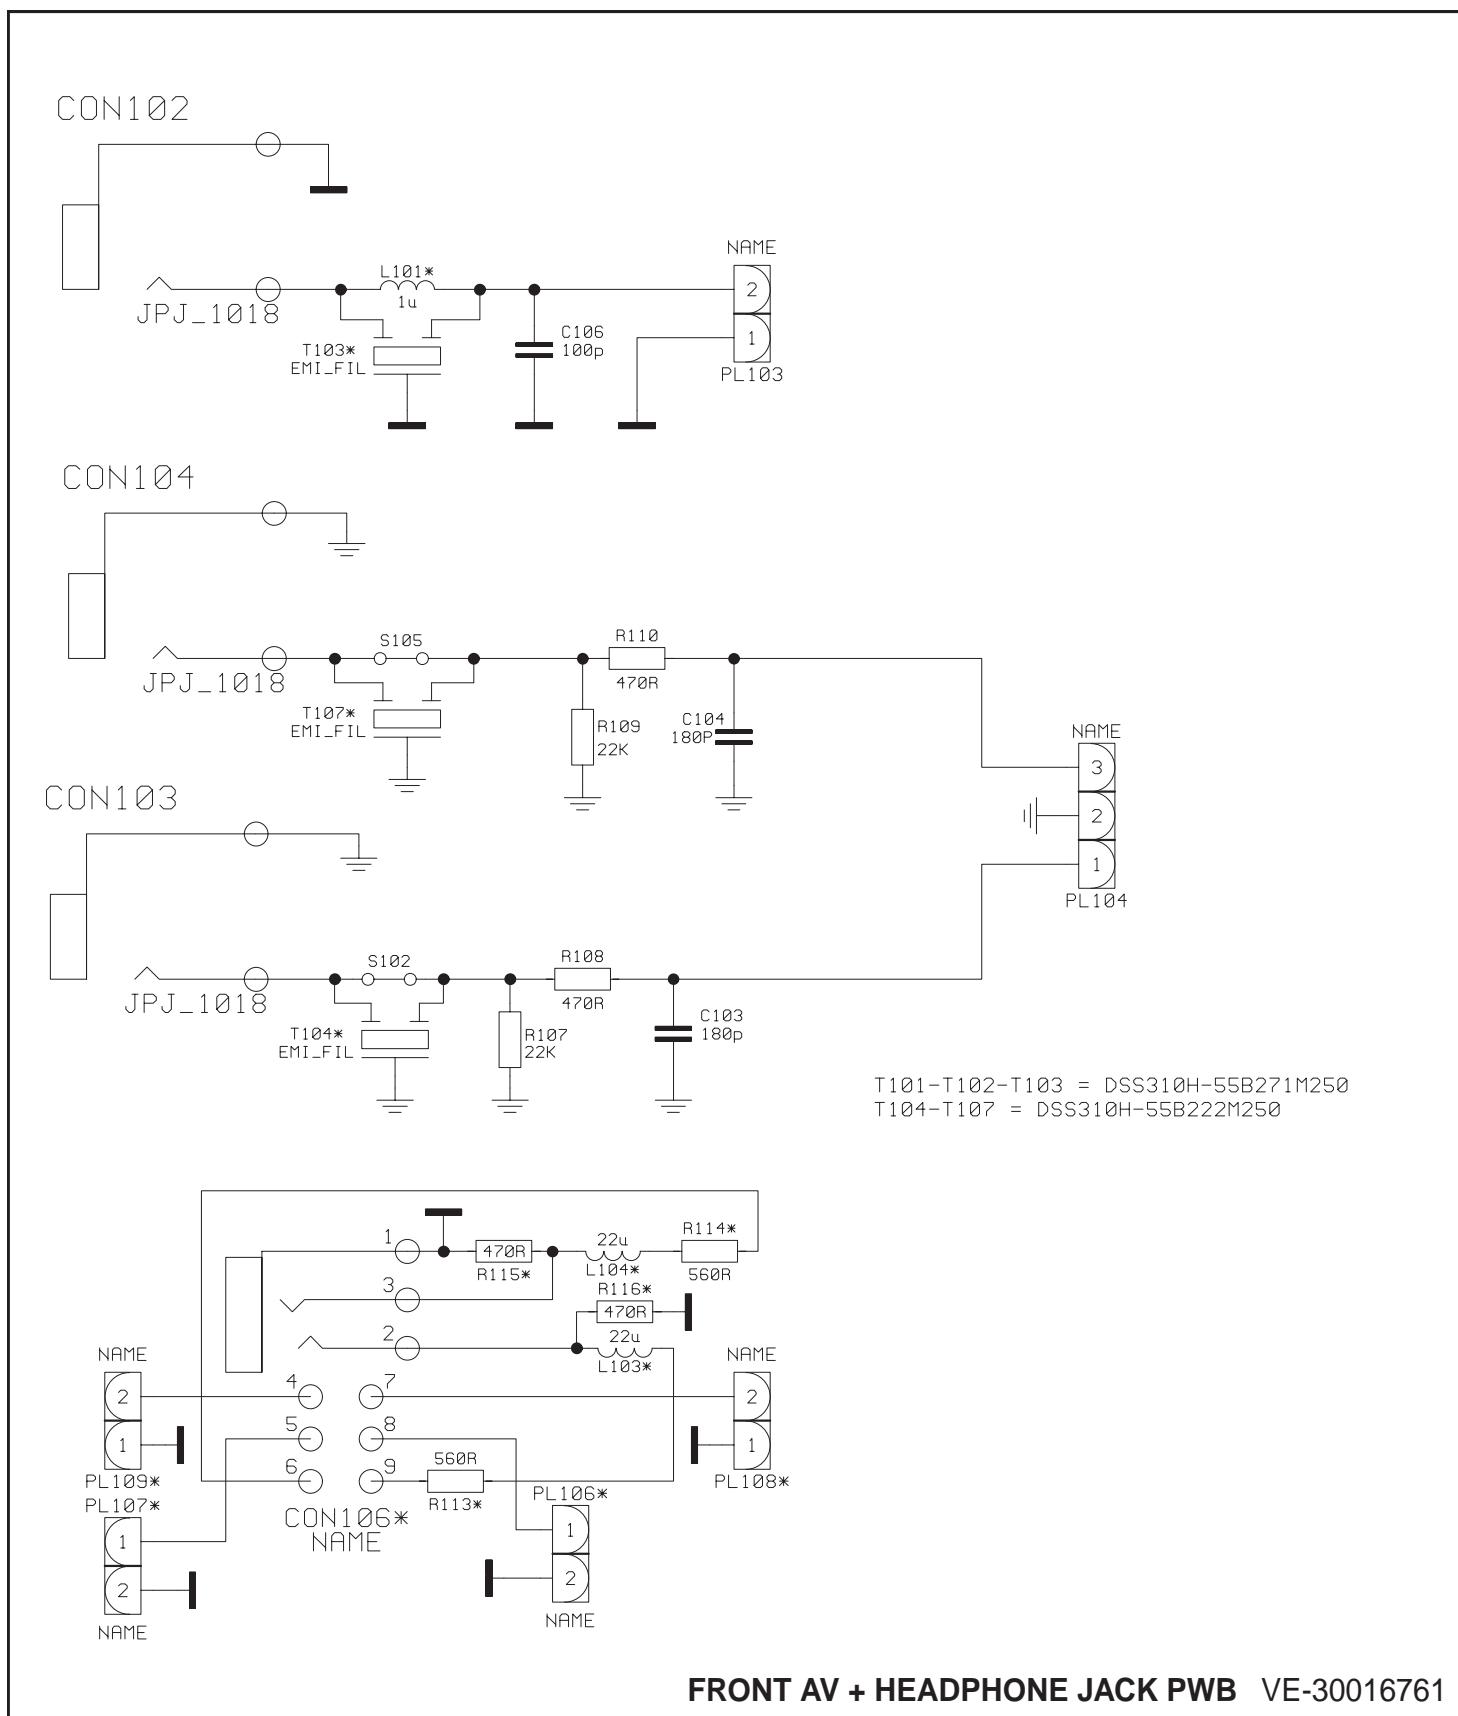


No.51967

2-17


2-18


No.51967

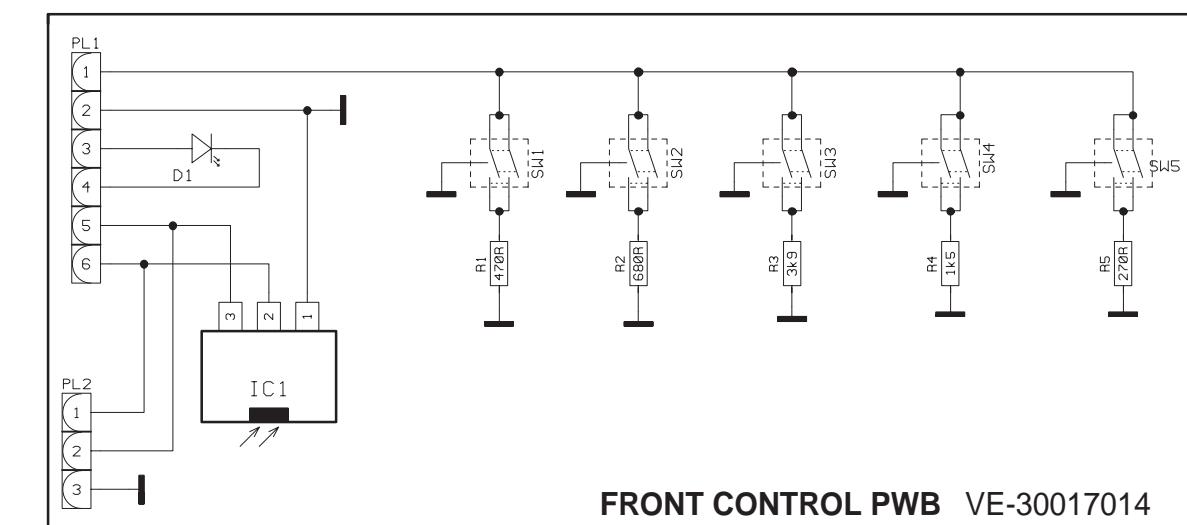

PATTERN DIAGRAMS MAIN PWB PATTERN

FRONT

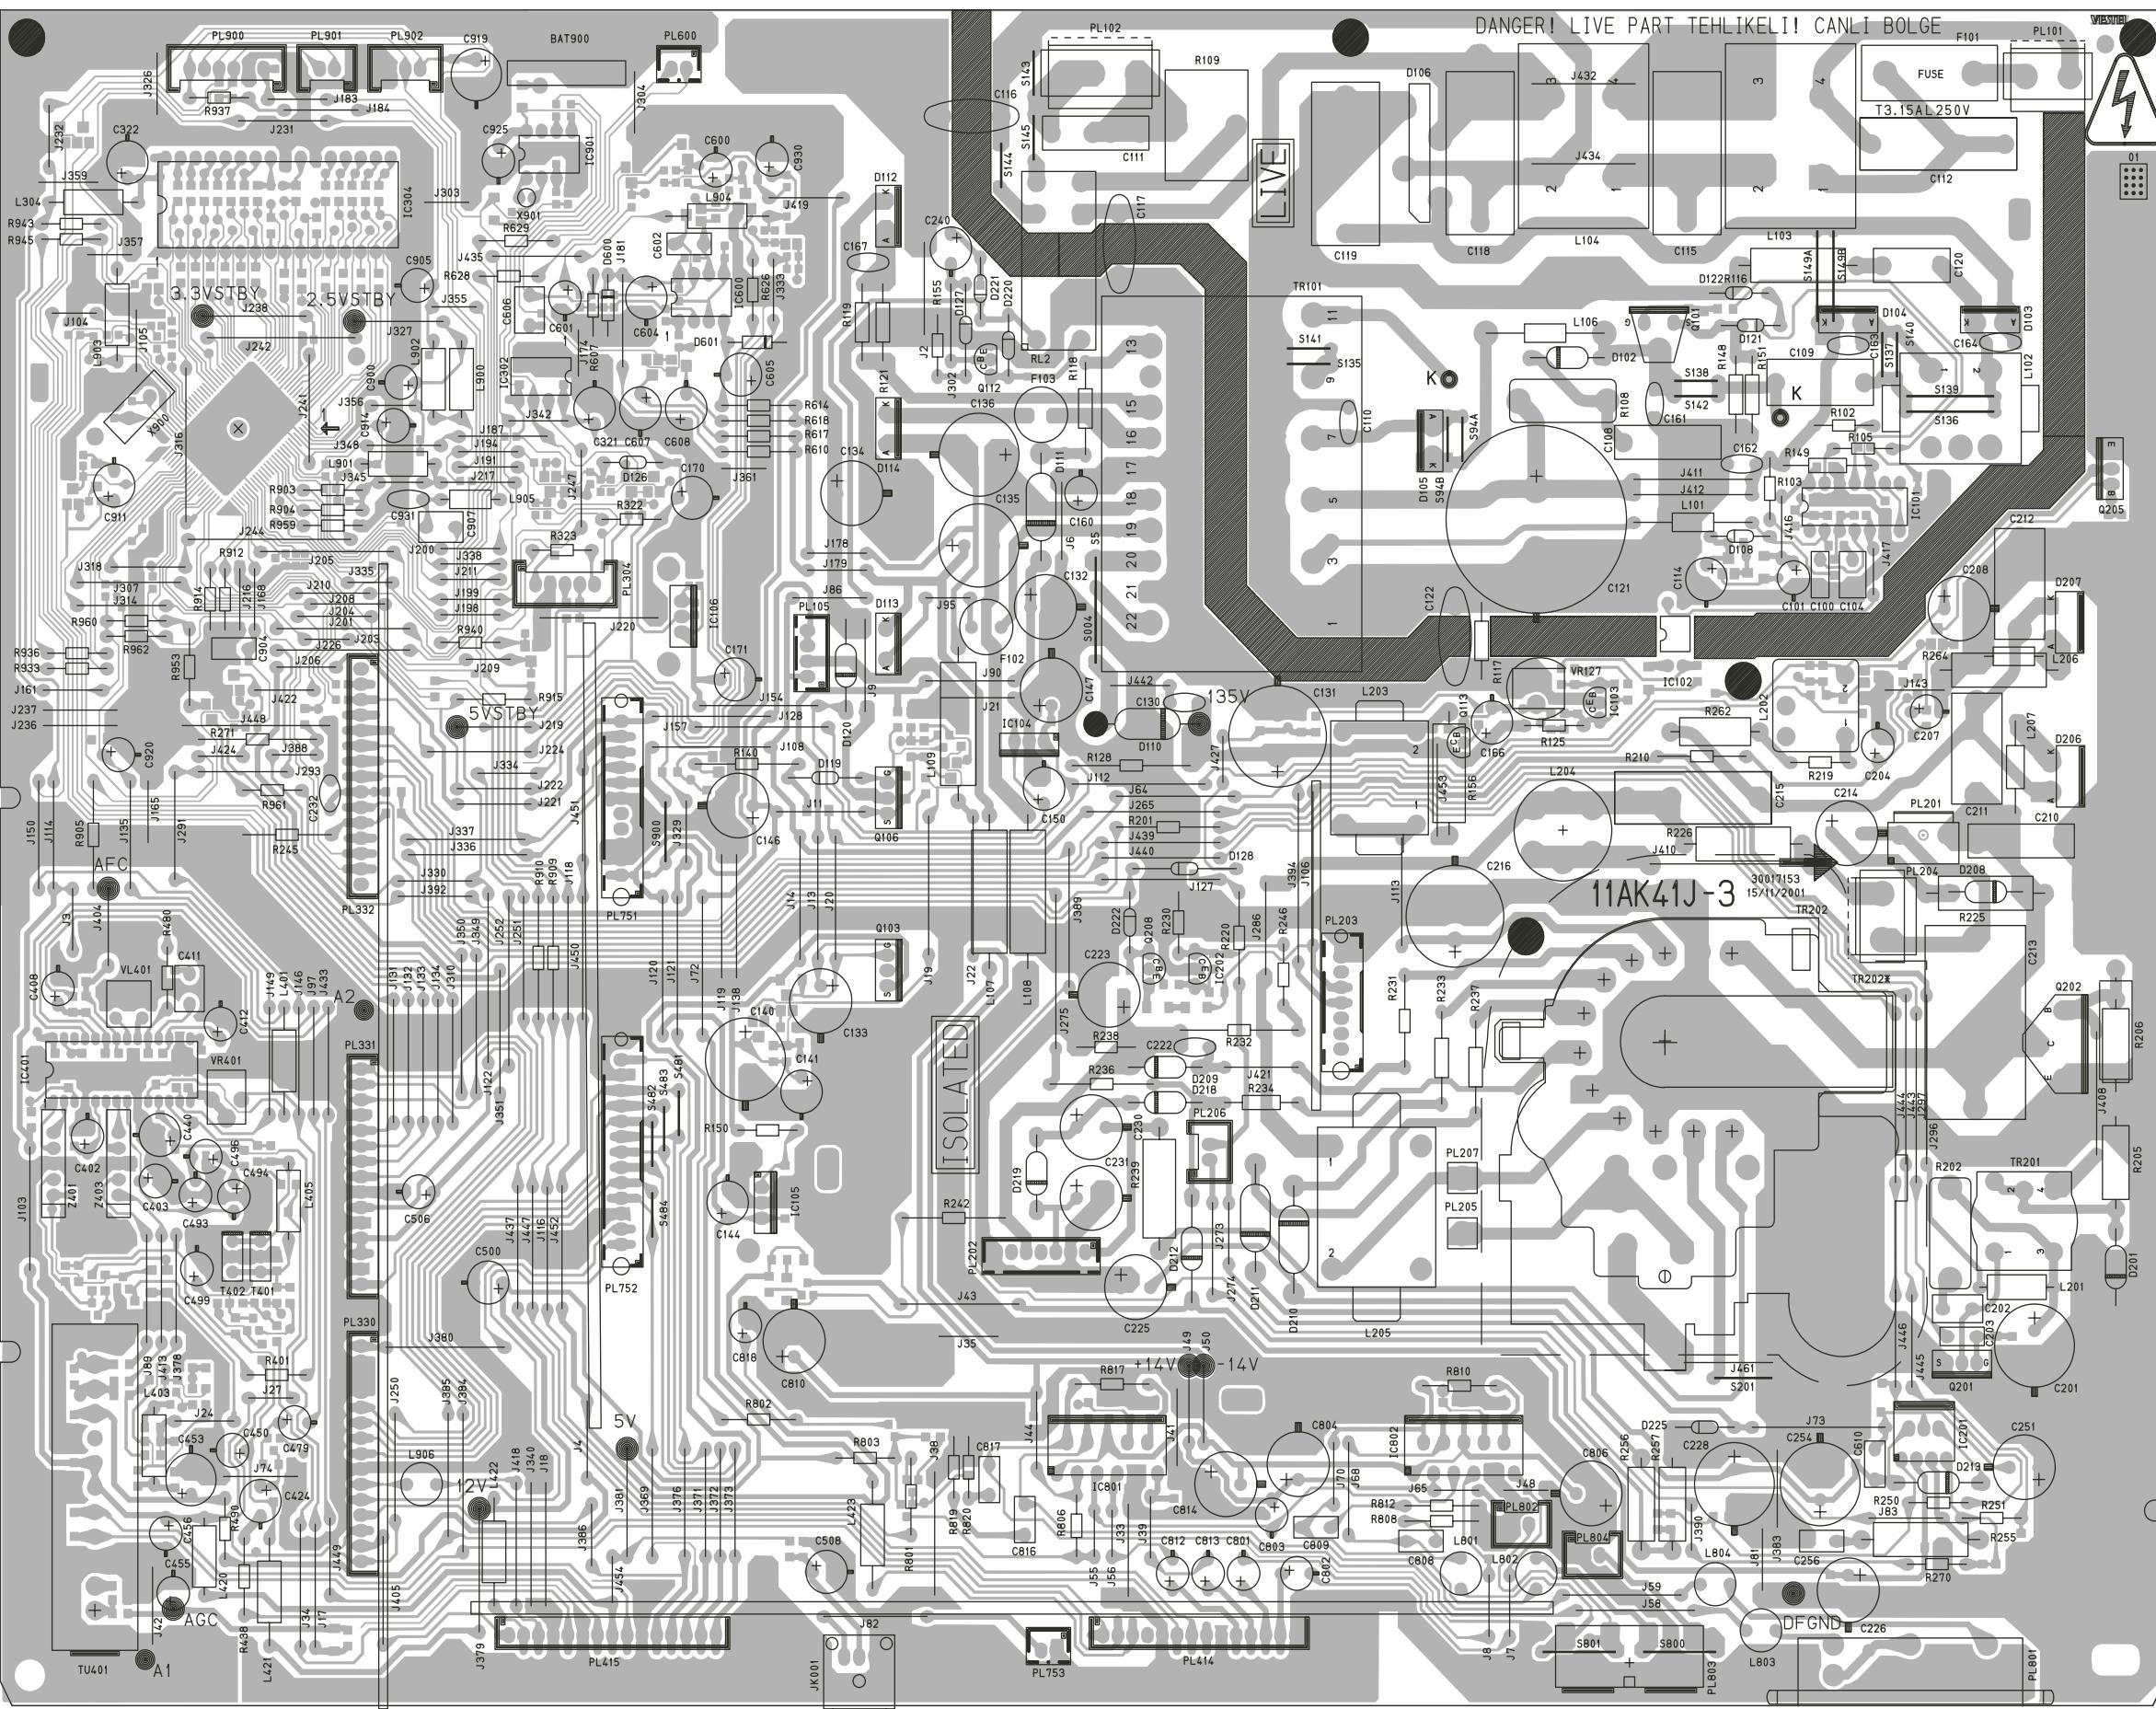


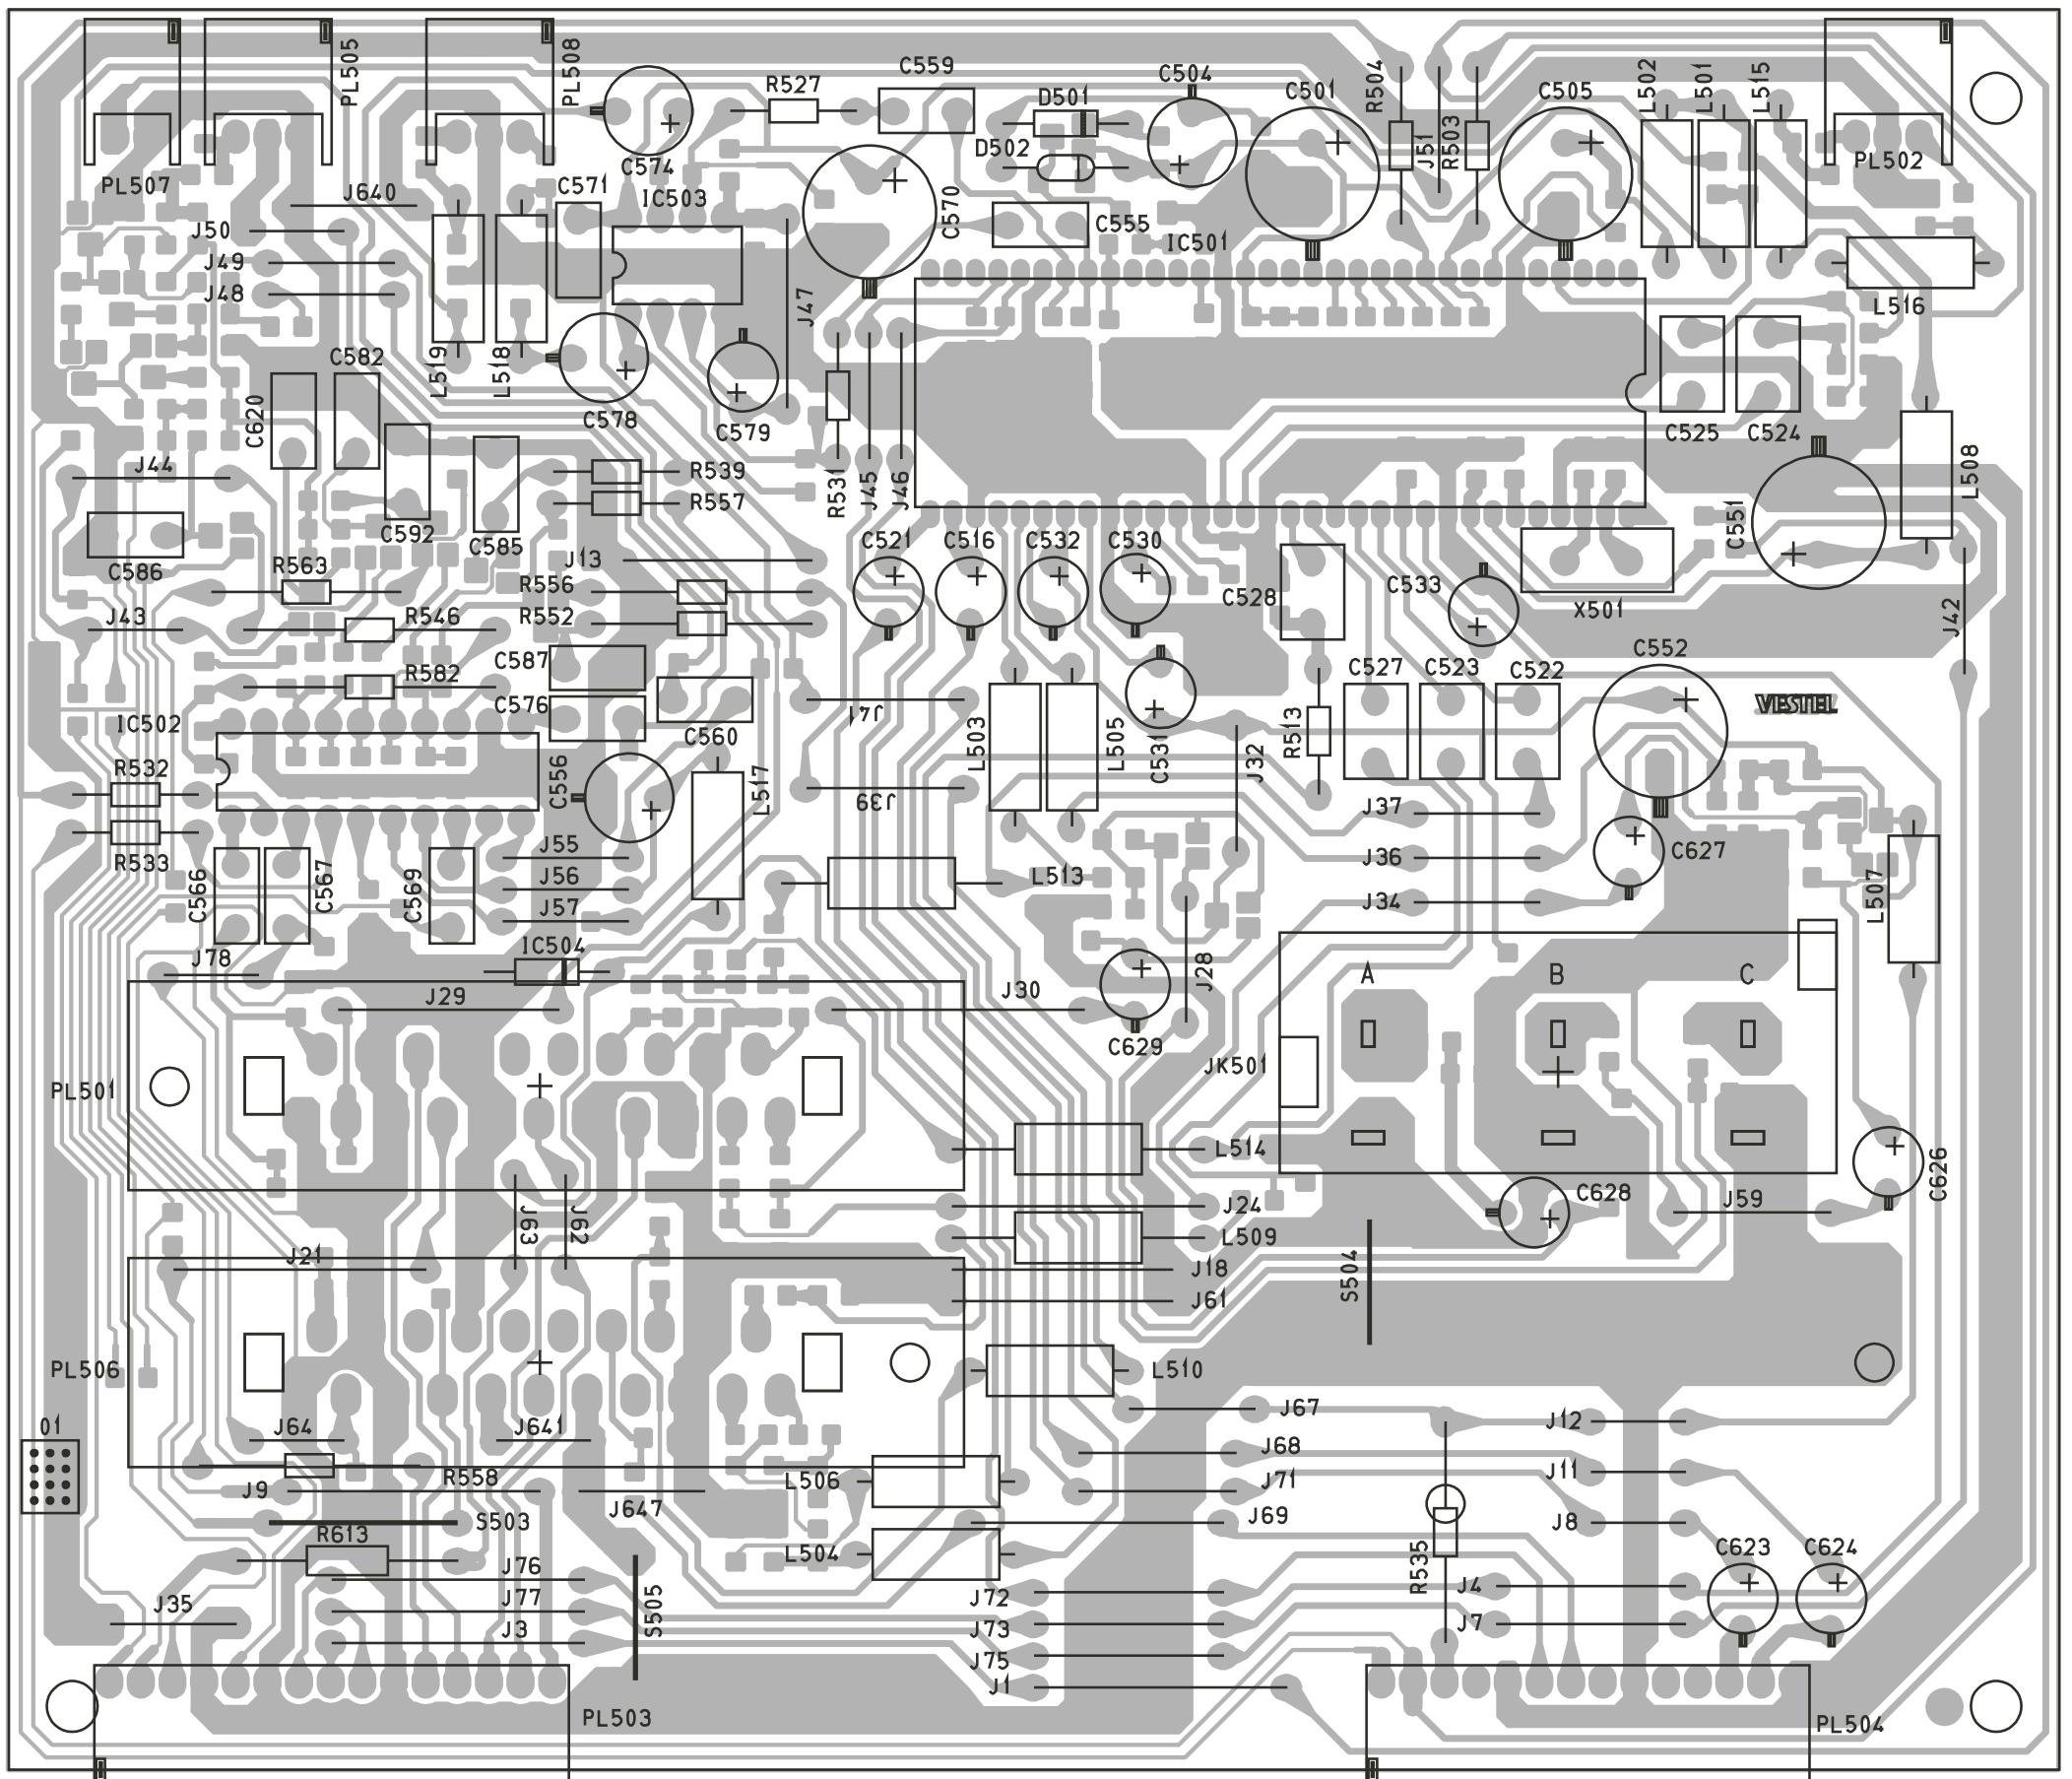
TOP
↑

FEATURE BOX PWB PATTERN

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB


AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

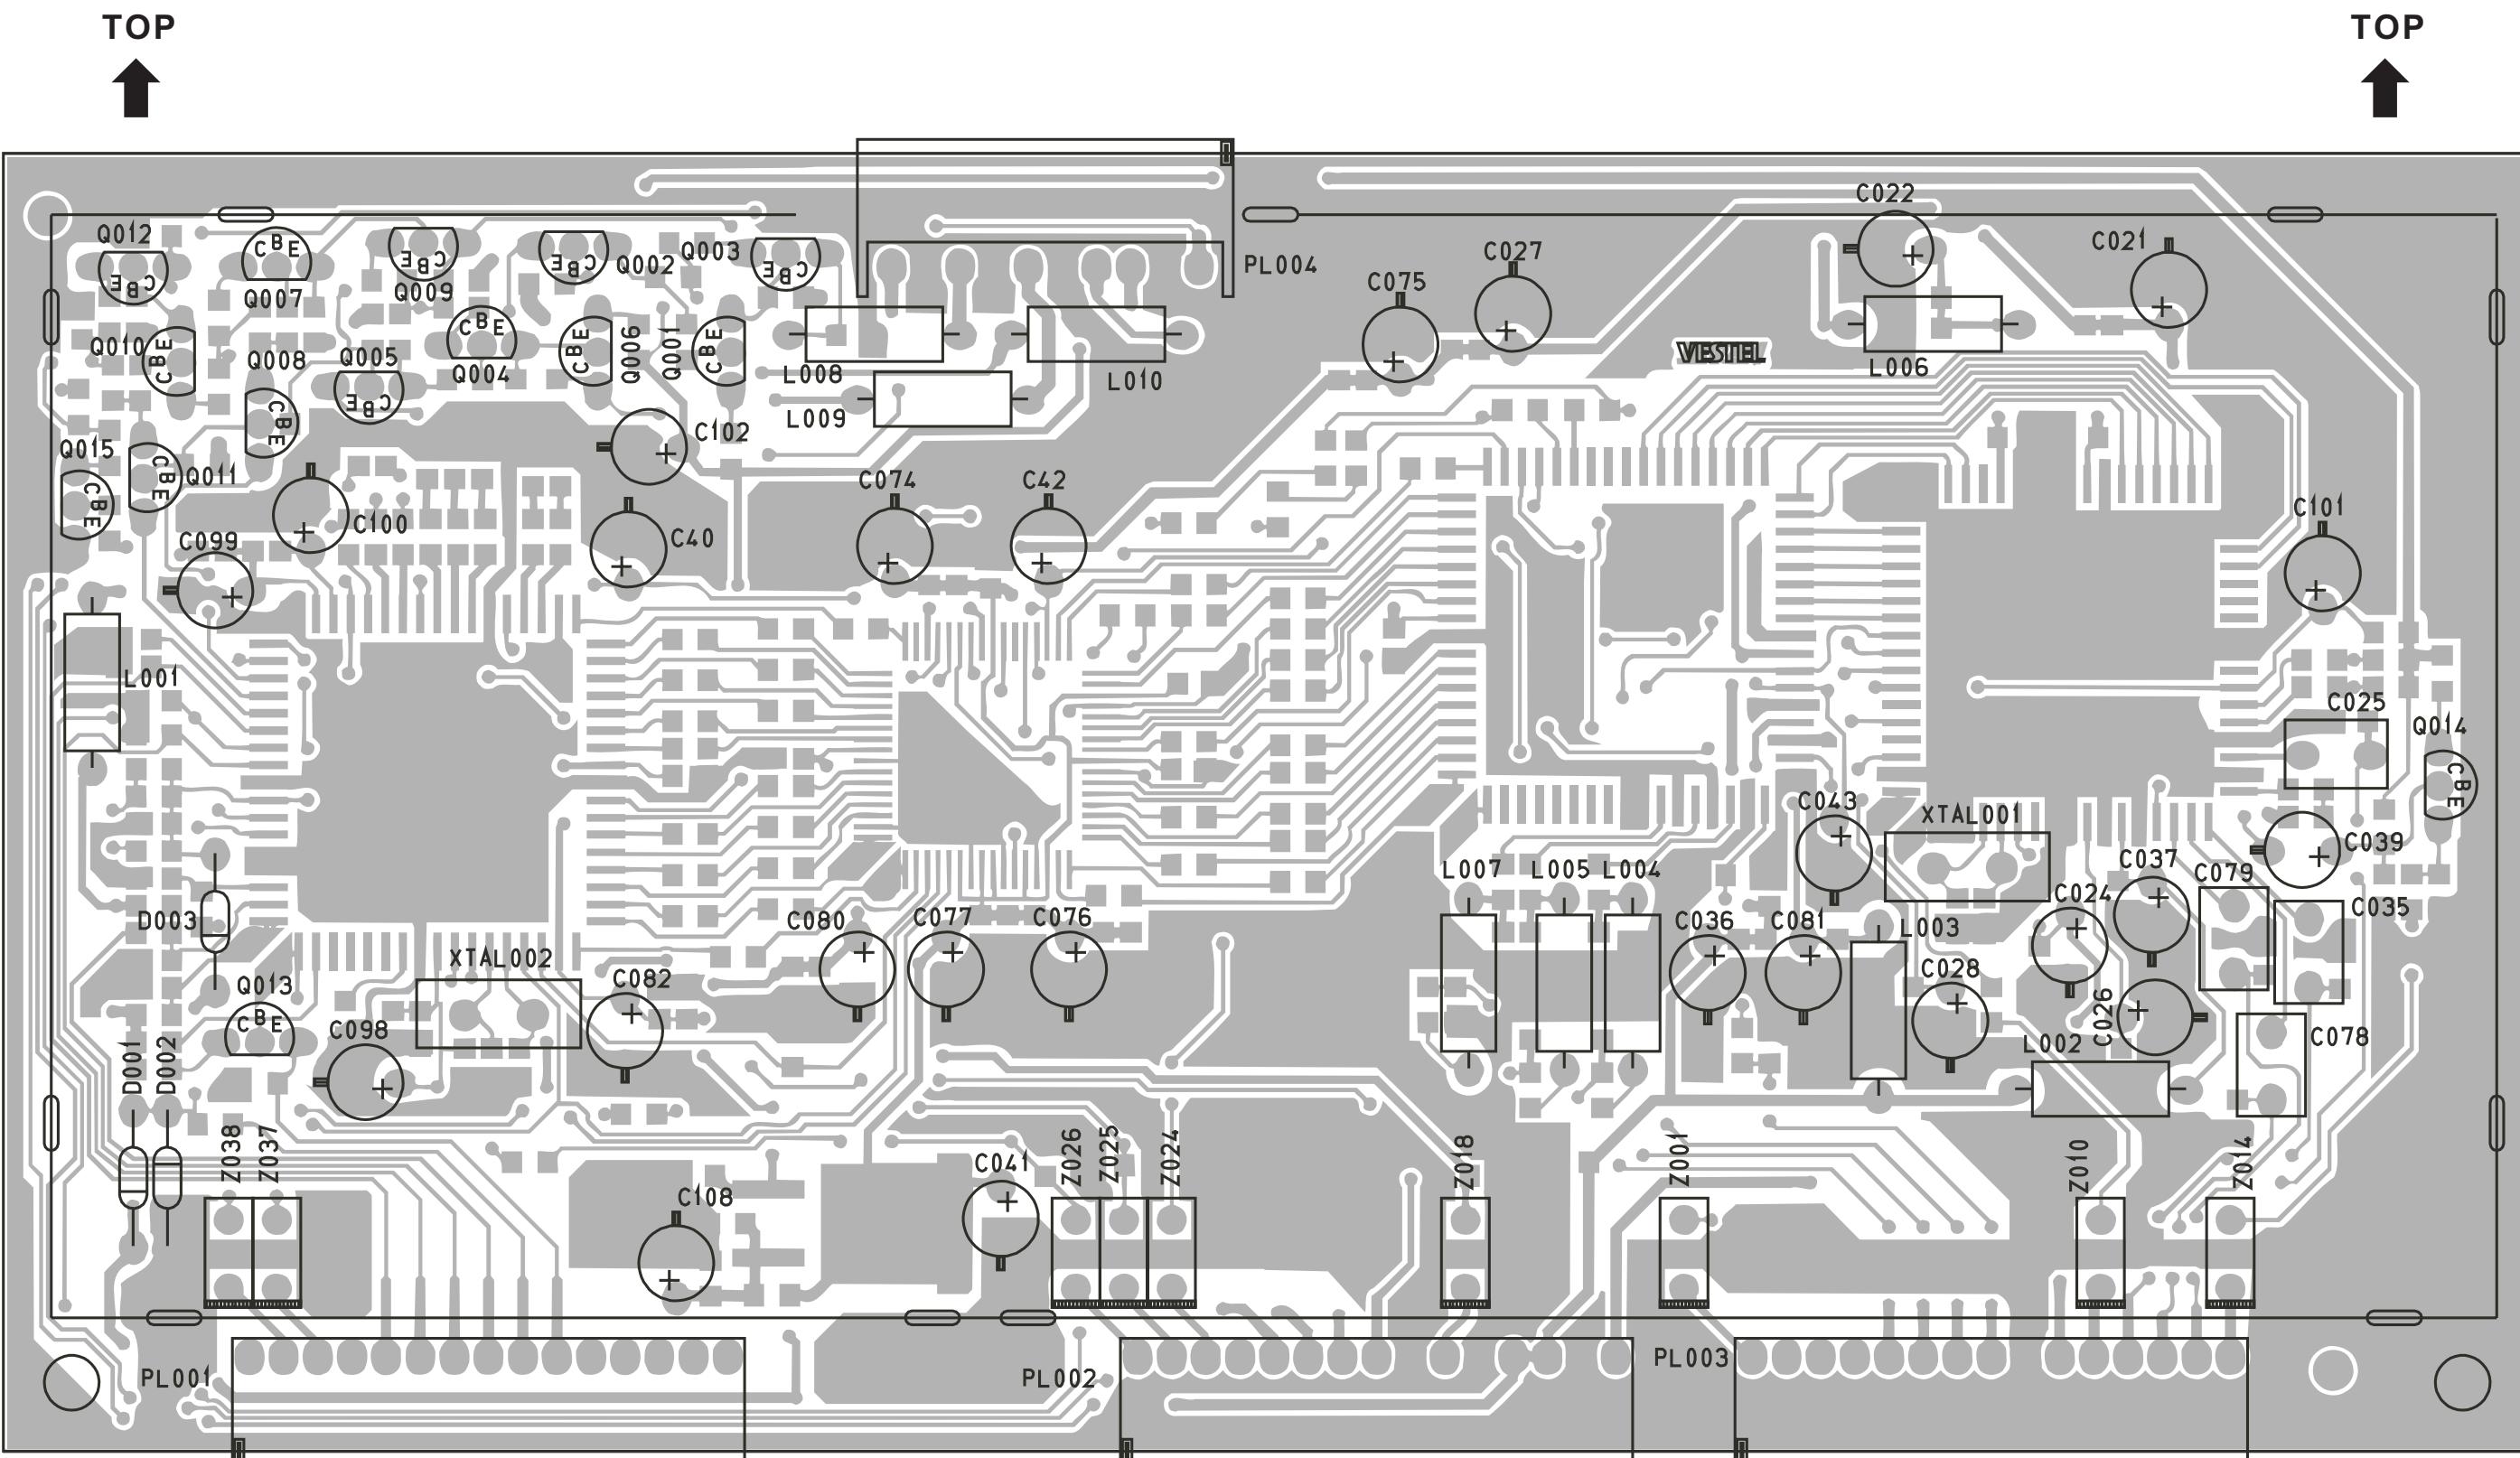


CRT SOCKET PWB PATTERN

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB

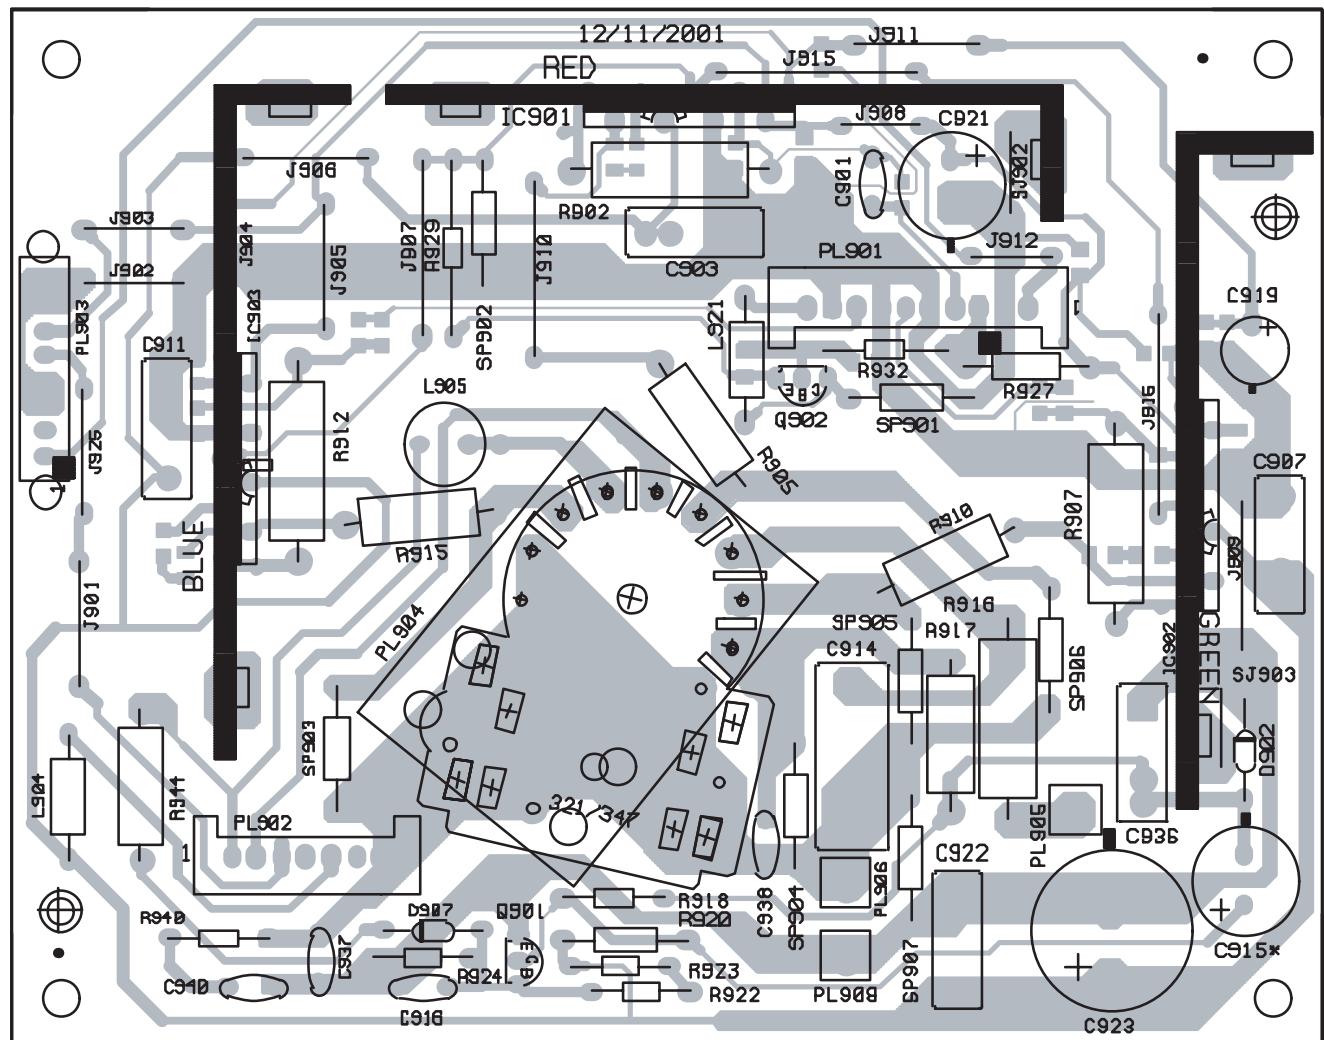


TOP

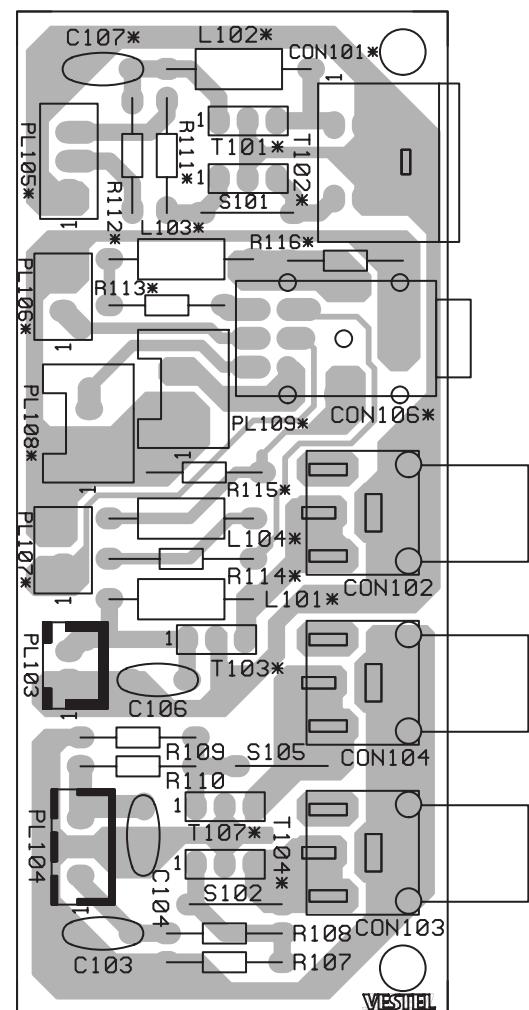

FRONT

FRONT CONTROL PWB PATTERN

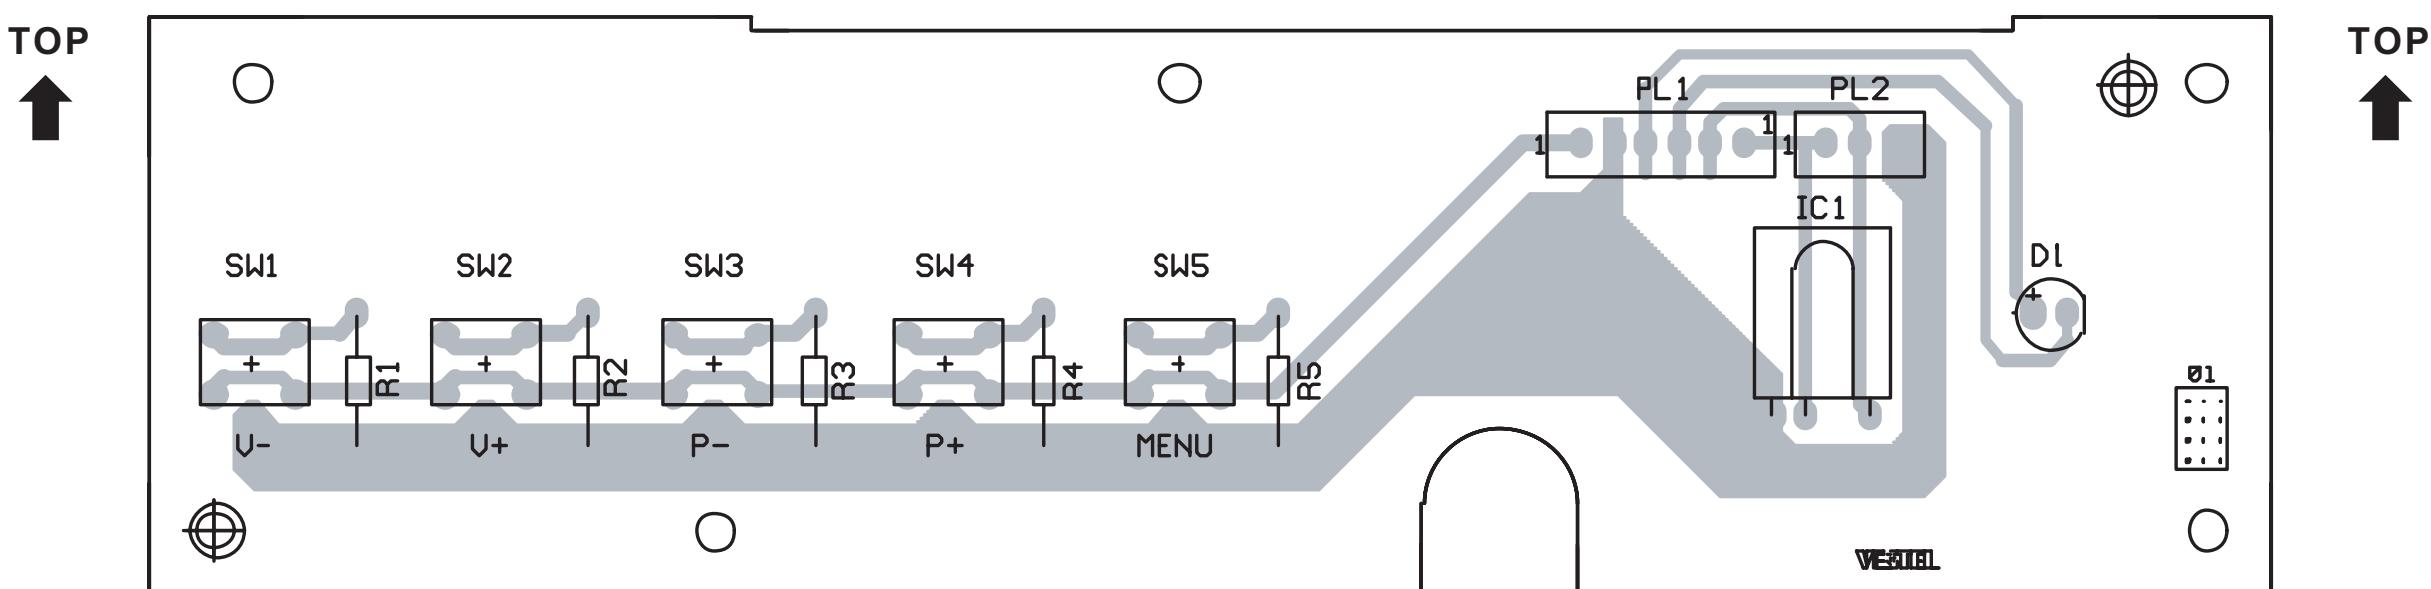

TOP

AV28BH7ENS / AV28BH7ENB
AV28BH7EPS / AV28BH7EPB
AV28BH7EES / AV28BH7EEB



VICTOR COMPANY OF JAPAN, LIMITED

HOME AV NETWORK BUSINESS UNIT. 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama, Kanagawa-prefecture, 221-8528, Japan

PARTS LIST

CONTENTS

■ USING PW BOARD & REMOTE CONTROL UNIT	21
■ EXPLODED VIEW PARTS LIST	22
■ EXPLODED VIEW	23
■ PRINTED WIRING BOARD PARTS LIST	

[AV28BH7ENS/ENB]

● MAIN PW BOARD ASS'Y	24
● MULTISOUND PW BOARD ASS'Y	27
● FEATURE BOX PW BOARD ASS'Y	29
● CRT SOCKET PW BOARD ASS'Y	30
● FRONT CONTROL PW BOARD ASS'Y	31
● FRONT AV + HEADPHONE JACK PW BOARD ASS'Y	31

[AV28BH7EPS/EPB]

● MAIN PW BOARD ASS'Y	32
-----------------------------	----

[AV28BH7EES/EEB]

● MAIN PW BOARD ASS'Y	36
■ PACKING / PACKING PARTS LIST	40

USING PW BOARD & REMOTE CONTROL UNIT

PWB ASS'Y \ Model	AV28BH7ENS AV28BH7ENB	AV28BH7EPS AV28BH7EPB	AV28BH7EES AV28BH7EEB
MAIN PWB	VE-20084580	VE-20084599	VE-20084594
MULTISOUND PWB	VE-30017302	←	←
FEATURE BOX PWB	VE-30013755	←	←
CRT SOCKET PWB	VE-30017303	←	←
FRONT CONTROL PWB	VE-30017014	←	←
FRONT AV + HEADPHONE JACK PWB	VE-30016761	←	←
REMOTE CONTROL UNIT	VE-30015781 (RM-C85)	←	←

AV28BH7ENS / AV28BH7ENB
 AV28BH7EPS / AV28BH7EPB
 AV28BH7EES / AV28BH7EEB

EXPLODED VIEW PARTS LIST


[SILVER model : AV28BH7ENS, AV28BH7EES, AV28BH7EPS]

▲ Ref.No.	Part No.	Part Name	Description
▲ V01	VE-30002754	PICTURE TUBE (ITC)	
▲ L01	VE-30002728	DEG.COIL & EARTH	
▲ TR202	VE-30016922	FBT TRF (within MAIN PWB)	
▲ 1	VE-20083491	BUTTON ON/OFF	
▲ 2	VE-35004544	SPRING	
▲ 3	VE-20069017	FRONT PANEL (LENS)	
▲ 4	VE-20086394	FRONT CABINET	
▲ 5	VE-20083490	BUTTON ASSY	
▲ 6	VE-20069219	FRONT AV DOOR	
7	VE-20003605	PIN (FRONT AV DOOR) (X2)	
8	VE-40000026	EJECTOR	
9	VE-20078776	LENS LED	
10	VE-20004339	LENS PRE-AMP	
11	VE-30001946	SPEAKER (57x160mm) (X2)	
12	VE-30001947	TWEETER (CLOSED) (X2)	
▲ 13	VE-20078582	BASE	
▲ 14	VE-20004005	SHASSIS FRAME	
15	VE-20084616	BACK COVER	
▲ 16	VE-20087523	BACK DOOR	
17	VE-35000216	SCREW (X8)	
18	VE-35000214	SCREW (X4)	
19	VE-40009154	LOGO JVC	

[BLACK model : AV28BH7ENB, AV28BH7EEB, AV28BH7EPB]

▲ Ref.No.	Part No.	Part Name	Description
▲ V01	VE-30002754	PICTURE TUBE (ITC)	
▲ L01	VE-30002728	DEG.COIL & EARTH	
▲ TR202	VE-30016922	FBT TRF (within MAIN PWB)	
▲ 1	VE-20069016	BUTTON ON/OFF	
▲ 2	VE-35004544	SPRING	
▲ 3	VE-20069218	FRONT PANEL (LENS)	
▲ 4	VE-20086395	FRONT CABINET	
▲ 5	VE-20081484	BUTTON ASSY	
▲ 6	VE-20086314	FRONT AV DOOR	
7	VE-20003605	PIN (FRONT AV DOOR) (X2)	
8	VE-40000026	EJECTOR	
9	VE-20078776	LENS LED	
10	VE-20004339	LENS PRE-AMP	
11	VE-30001946	SPEAKER (57x160mm) (X2)	
12	VE-30001947	TWEETER (CLOSED) (X2)	
▲ 13	VE-20081578	BASE	
▲ 14	VE-20040575	SHASSIS FRAME	
15	VE-20069018	BACK COVER	
▲ 16	VE-20040684	BACK DOOR	
17	VE-35000216	SCREW (X8)	
18	VE-35000214	SCREW (X4)	
19	VE-40009152	LOGO JVC	

EXPLODED VIEW

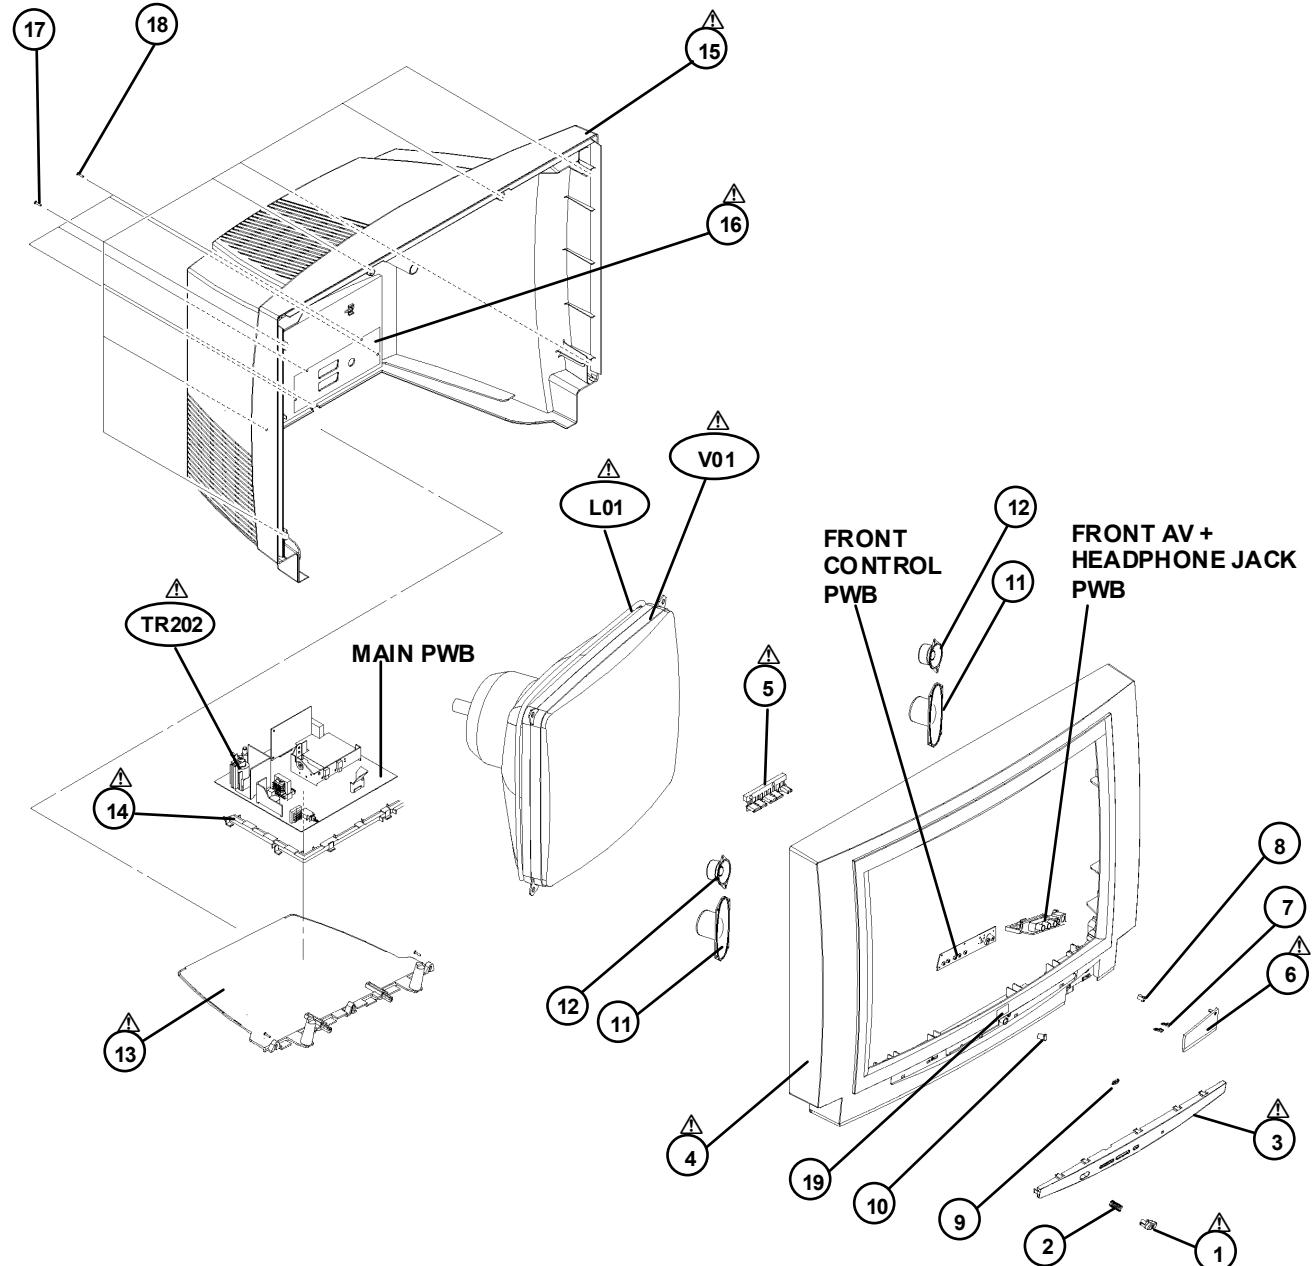

PRINTED WIRING BOARD PARTS LIST**[AV28BH7ENS / AV28BH7ENB]****MAIN P.W. BOARD ASS'Y (VE-20084580)**

Symbol No.	Part No.	Part Name	Description	Symbol No.	Part No.	Part Name	Description
RESISTOR							
R101	VE-30000668	SMD RES.	1/10W 33K J	R245	VE-30000466	CF RES.	1/4W 1K J
R102	VE-30007782	MF RES.	1/4W 3.9M F	R246	VE-30000752	CF RES.	1/4W 56K J
R103	VE-30000855	MF RES.	1/4W 1M F	R250	VE-30000477	CF RES.	1/4W 100K J
R104	VE-30000668	SMD RES.	1/10W 33K J	R251	VE-30000477	CF RES.	1/4W 100K J
R105	VE-30000452	CF RES.	1/4W 10R J	R252	VE-30000789	SMD RES.	1/10W 27K F
R106	VE-30000664	SMD RES.	1/10W 3.3K J	R254	VE-30000636	SMD RES.	1/10W 27K J
R107	VE-30007019	SMD RES.	1/10W 10K F	R255	VE-30001134	MO RES.	2W 2.2R J
R108	VE-30007784	MO RES.	5W 33K J	R256	VE-30001100	MO RES.	1W 150R J
R109	VE-30001270	PTC	9 OHM	R257	VE-30001173	MO RES.	1W 0.47R J
R110	VE-30001171	MO RES.	2W 4.7K J	R260	VE-30000778	SMD RES.	1/10W 6.8K J
R111	VE-30001257	MG RES.	1/2W 4.7M J	R261	VE-30000778	SMD RES.	1/10W 6.8K J
R112	VE-30009036	FUSE RES.	1/2W 0.1R J	R262	VE-30001237	FUSE RES.	1/2W 3.3R J
R113	VE-30009036	FUSE RES.	1/2W 0.1R J	R264	VE-30001077	MO RES.	2W 10R J
R120	VE-30000814	SMD RES.	1/10W 820R J	R270	VE-30000541	CF RES.	1/4W 1.5M J
R122	VE-30000469	SMD RES.	1/10W 1K J	R271	VE-30000744	CF RES.	1/4W 560R J
R123	VE-30000469	SMD RES.	1/10W 1K J	R272	VE-30000475	SMD RES.	1/10W 10K J
R124	VE-30000480	SMD RES.	1/10W 100K J	R280	VE-30000480	SMD RES.	1/10W 100K J
R125	VE-30000927	MF RES.	1/4W 220K J	R281	VE-30000480	SMD RES.	1/10W 100K J
R126	VE-30000664	SMD RES.	1/10W 3.3K J	R318	VE-30000469	SMD RES.	1/10W 1K J
R127	VE-30000469	SMD RES.	1/10W 1K J	R322	VE-30000594	CF RES.	1/4W 22K J
R128	VE-30000536	CF RES.	1/4W 150K J	R323	VE-30000459	CF RES.	1/4W 100R J
R129	VE-30007019	SMD RES.	1/10W 10K F	R324	VE-30000464	SMD RES.	1/10W 100R J
R130	VE-30000721	SMD RES.	1/10W 4.7K J	R327	VE-30000464	SMD RES.	1/10W 100R J
R134	VE-30000469	SMD RES.	1/10W 1K J	R360	VE-30000659	SMD RES.	1/10W 330R J
R135	VE-30007790	SMD RES.	1/10W 4.3K F	R361	VE-30000659	SMD RES.	1/10W 330R J
R136	VE-30000774	SMD RES.	1/10W 680R J	R362	VE-30000659	SMD RES.	1/10W 330R J
R137	VE-30007021	SMD RES.	1/10W 1K F	R363	VE-30000659	SMD RES.	1/10W 330R J
R138	VE-30007786	SMD RES.	1/10W 2.55K F	R364	VE-30000659	SMD RES.	1/10W 330R J
R139	VE-30000774	SMD RES.	1/10W 680R J	R365	VE-30000659	SMD RES.	1/10W 330R J
R140	VE-30000459	CF RES.	1/4W 100R J	R366	VE-30000659	SMD RES.	1/10W 330R J
R141	VE-30000475	SMD RES.	1/10W 10K J	R367	VE-30000659	SMD RES.	1/10W 330R J
R142	VE-30000475	SMD RES.	1/10W 10K J	R368	VE-30000659	SMD RES.	1/10W 330R J
R143	VE-30007021	SMD RES.	1/10W 1K F	R369	VE-30000659	SMD RES.	1/10W 330R J
R144	VE-30007788	SMD RES.	1/10W 2.7K F	R370	VE-30000659	SMD RES.	1/10W 330R J
R145	VE-30000732	SMD RES.	1/10W 470K J	R371	VE-30000659	SMD RES.	1/10W 330R J
R146	VE-30000469	SMD RES.	1/10W 1K J	R372	VE-30000659	SMD RES.	1/10W 330R J
R148	VE-30014023	FUSE RES.	1/2W 0.1R J	R373	VE-30000659	SMD RES.	1/10W 330R J
R149	VE-30007204	MF RES.	1/2W 1.5M F	R374	VE-30000659	SMD RES.	1/10W 330R J
R150	VE-30007783	FUSE RES.	1/4W 2.2R J	R375	VE-30000659	SMD RES.	1/10W 330R J
R151	VE-30014023	FUSE RES.	1/2W 0.1R J	R376	VE-30000659	SMD RES.	1/10W 330R J
R152	VE-30000659	SMD RES.	1/10W 330R J	R378	VE-30000659	SMD RES.	1/10W 330R J
R153	VE-30012649	SMD RES.	1/10W 150R J	R379	VE-30000659	SMD RES.	1/10W 330R J
R154	VE-30012984	SMD RES.	1/10W 91R J	R380	VE-30000659	SMD RES.	1/10W 330R J
R155	VE-30000712	CF RES.	1/4W 470R J	R381	VE-30000659	SMD RES.	1/10W 330R J
R156	VE-30001089	MO RES.	2W 1R J	R382	VE-30000659	SMD RES.	1/10W 330R J
R157	VE-30000534	SMD RES.	1/10W 15K J	R383	VE-30000659	SMD RES.	1/10W 330R J
R158	VE-30000475	SMD RES.	1/10W 10K J	R384	VE-30000659	SMD RES.	1/10W 330R J
R159	VE-30000480	SMD RES.	1/10W 100K J	R385	VE-30000659	SMD RES.	1/10W 330R J
R160	VE-30006923	SMD RES.	1/10W 4.3K J	R397	VE-30000659	SMD RES.	1/10W 330R J
R202	VE-30007779	MO RES.	5W 47R J	R398	VE-30000659	SMD RES.	1/10W 330R J
R203	VE-30000534	SMD RES.	1/10W 15K J	R411	VE-30000747	SMD RES.	1/10W 560R J
R205	VE-30001004	MF RES.	1/2W 0.56R J	R412	VE-30000721	SMD RES.	1/10W 4.7K J
R206	VE-30001079	MO RES.	1W 100R J	R413	VE-30000475	SMD RES.	1/10W 10K J
R210	VE-30000583	CF RES.	1/4W 220R J	R414	VE-30000469	SMD RES.	1/10W 1K J
R211	VE-30000721	SMD RES.	1/10W 4.7K J	R415	VE-30000517	SMD RES.	1/10W 15R J
R212	VE-30000593	SMD RES.	1/10W 2.2K J	R416	VE-30000717	SMD RES.	1/10W 470R J
R213	VE-30000593	SMD RES.	1/10W 2.2K J	R421	VE-30000563	SMD RES.	1/10W 1.8K J
R214	VE-30000593	SMD RES.	1/10W 2.2K J	R422	VE-30000464	SMD RES.	1/10W 100R J
R215	VE-30000721	SMD RES.	1/10W 4.7K J	R424	VE-30000701	SMD RES.	1/10W 1K F
R216	VE-30000631	SMD RES.	1/10W 2.7K J	R425	VE-30000797	SMD RES.	1/10W 75R J
R217	VE-30000593	SMD RES.	1/10W 2.2K J	R428	VE-30000475	SMD RES.	1/10W 10K J
R220	VE-30000590	CF RES.	1/4W 2.2K J	R429	VE-30000475	SMD RES.	1/10W 10K J
R225	VE-30001086	MO RES.	2W 10R J	R436	VE-30000735	SMD RES.	1/10W 4.7R J
R226	VE-30001168	MO RES.	2W 470R J	R440	VE-30000614	SMD RES.	1/10W 2.4K J
R227	VE-30000469	SMD RES.	1/10W 1K J	R441	VE-30000475	SMD RES.	1/10W 10K J
R228	VE-30000475	SMD RES.	1/10W 10K J	R445	VE-30000814	SMD RES.	1/10W 820R J
R229	VE-30000727	SMD RES.	1/10W 47K J	R475	VE-30000524	SMD RES.	1/10W 150R J
R230	VE-30000902	MF RES.	1/4W 1.8K F	R480	VE-30000718	CF RES.	1/4W 4.7K J
R231	VE-30001229	FUSE RES.	1W 2.2R J	R490	VE-30000466	CF RES.	1/4W 1K J
R232	VE-30000477	CF RES.	1/4W 100K J	R492	VE-30000503	SMD RES.	1/10W 12K J
R233	VE-30001244	FUSE RES.	0.47R 1/2W J	R506	VE-30012695	SMD RES.	1/10W 470R J
R234	VE-30009036	FUSE RES.	1/2W 0.1R J	R509	VE-30000797	SMD RES.	1/10W 75R J
R235	VE-30000668	SMD RES.	1/10W 33K J	R510	VE-30007021	SMD RES.	1/10W 1K F
R236	VE-30000718	CF RES.	1/4W 4.7K J	R511	VE-30000464	SMD RES.	1/10W 100R J
R237	VE-30001244	FUSE RES.	0.47R 1/2W J	R512	VE-30000464	SMD RES.	1/10W 100R J
R238	VE-30000729	CF RES.	1/4W 470K J	R513	VE-30000457	SMD RES.	1/10W 10R J
R239	VE-30001089	MO RES.	2W 1R J	R518	VE-30000735	SMD RES.	1/10W 4.7R J
R240	VE-30000469	SMD RES.	1/10W 1K J	R801	VE-30000718	CF RES.	1/4W 4.7K J
R241	VE-30000818	SMD RES.	1/10W 8.2K J	R802	VE-30000718	CF RES.	1/4W 4.7K J
R242	VE-30000784	CF RES.	1/4W 680K J	R803	VE-30000628	CF RES.	1/4W 2.7K J

[AV28BH7ENS / AV28BH7ENB]

▲ Symbol No.	Part No.	Part Name	Description	▲ Symbol No.	Part No.	Part Name	Description
RESISTOR							
R804	VE-30000475	SMD RES.	1/10W 10K J	C107	VE-30000263	SMD CAP.	56PF 50V J
R805	VE-30000534	SMD RES.	1/10W 15K J	C108	VE-30000123	PP CAP.	33NF 630V K
R806	VE-30000531	CF RES.	1/4W 15K J	C109	VE-30000159	MKP CAP.	4.7NF 1.6KV J
R807	VE-30000567	SMD RES.	1/10W 18K J	C110	VE-30000208	C CAP.	470PF 1KV K
R808	VE-30000734	CF RES.	1/4W 4.7R J	C111	VE-30000131	MKP CAP.	100NF 250V J
R809	VE-30000717	SMD RES.	1/10W 470R J	△ C112	VE-30000094	MKT CAP.	220NF AC275V M
R810	VE-30000564	CF RES.	1/4W 18K J	C114	VE-30000353	EL CAP.	100UF 25V M
R811	VE-30000717	SMD RES.	1/10W 470R J	△ C115	VE-30007858	MKT CAP.	470NF AC275V M
R812	VE-30000734	CF RES.	1/4W 4.7R J	△ C118	VE-30007755	MKT CAP.	680NF AC275V M
R813	VE-30000475	SMD RES.	1/10W 10K J	C119	VE-30007754	MKP CAP.	1UF 400V
R819	VE-30000734	CF RES.	1/4W 4.7R J	C120	VE-30007753	MKP CAP.	1NF 1KV
R820	VE-30000734	CF RES.	1/4W 4.7R J	C121	VE-30013690	EL CAP.	220UF 450V M
R900	VE-30012641	SMD RES.	1/10W 10K J	△ C122	VE-30000447	C CAP.	4.7NF 4KV M E
R901	VE-30012641	SMD RES.	1/10W 10K J	C124	VE-30000315	SMD CAP.	220NF 25V Z
R902	VE-30012641	SMD RES.	1/10W 10K J	C125	VE-30000315	SMD CAP.	220NF 25V Z
R903	VE-30000718	CF RES.	1/4W 4.7K J	C130	VE-30007708	C CAP.	1NF 1KV K
R904	VE-30000718	CF RES.	1/4W 4.7K J	C131	VE-30006909	EL CAP.	100UF M 250V
R905	VE-30000723	CF RES.	1/4W 47K J	C132	VE-30007750	EL CAP.	470UF 35V
R906	VE-30012696	SMD RES.	1/10W 47K J	C133	VE-30000409	EL CAP.	470UF 25V M
R907	VE-30012679	SMD RES.	1/10W 3.9K J	C134	VE-30007750	EL CAP.	470UF 35V
R908	VE-30012679	SMD RES.	1/10W 3.9K J	C135	VE-30007748	EL CAP.	1000UF 35V M
R909	VE-30000531	CF RES.	1/4W 15K J	C136	VE-30007748	EL CAP.	1000UF 35V M
R910	VE-30000531	CF RES.	1/4W 15K J	C137	VE-3000284	SMD CAP.	1NF 50V K R
R911	VE-30012641	SMD RES.	1/10W 10K J	C138	VE-30000224	SMD CAP.	220PF 50V J
R912	VE-30000471	CF RES.	1/4W 10K J	C139	VE-30000284	SMD CAP.	1NF 50V K R
R913	VE-30012641	SMD RES.	1/10W 10K J	C140	VE-30000360	EL CAP.	1000UF 25V M
R914	VE-30000471	CF RES.	1/4W 10K J	C141	VE-30000352	EL CAP.	1000UF 16V M
R915	VE-30000471	CF RES.	1/4W 10K J	C142	VE-30000294	SMD CAP.	1000UF 50V K
R916	VE-30012695	SMD RES.	1/10W 470R J	C143	VE-30000294	SMD CAP.	100NF 50V K
R917	VE-30012987	SMD RES.	1/10W 56R J	C144	VE-30000352	EL CAP.	100UF 16V M
R918	VE-30012692	SMD RES.	1/10W 4.7K J	C145	VE-30000309	SMD CAP.	2.2NF 50V K R
R919	VE-30012657	SMD RES.	1/10W 1K J	C146	VE-30000359	EL CAP.	1000UF 16V M
R920	VE-30012657	SMD RES.	1/10W 1K J	C147	VE-30000359	EL CAP.	1000UF 16V M
R921	VE-30012657	SMD RES.	1/10W 1K J	C148	VE-30000294	SMD CAP.	100NF 50V K
R922	VE-30012657	SMD RES.	1/10W 1K J	C149	VE-30000294	SMD CAP.	100NF 50V K
R923	VE-30012657	SMD RES.	1/10W 1K J	C150	VE-30000352	EL CAP.	100UF 16V M
R924	VE-30012696	SMD RES.	1/10W 47K J	C151	VE-30000284	SMD CAP.	1NF 50V K R
R925	VE-30012696	SMD RES.	1/10W 47K J	C160	VE-30007081	EL CAP.	4.7UF 50V M
R926	VE-30012696	SMD RES.	1/10W 47K J	C161	VE-30007308	C CAP.	220PF 1KV K
R927	VE-30012696	SMD RES.	1/10W 47K J	C162	VE-30007308	C CAP.	220PF 1KV K
R928	VE-30012510	SMD RES.	1/10W 100R J	C163	VE-30009208	C CAP.	470PF 1KV K
R929	VE-30012510	SMD RES.	1/10W 100R J	C165	VE-30016654	SMD CAP.	100NF 16V K R
R930	VE-30012641	SMD RES.	1/10W 10K J	C166	VE-30000400	EL CAP.	47UF 50V M
R931	VE-30012641	SMD RES.	1/10W 10K J	C167	VE-30009208	C CAP.	470PF 1KV K
R932	VE-30012641	SMD RES.	1/10W 10K J	C168	VE-30000294	SMD CAP.	100NF 50V K
R933	VE-30000718	CF RES.	1/4W 4.7K J	C170	VE-30000352	EL CAP.	100UF 16V M
R934	VE-30012692	SMD RES.	1/10W 4.7K J	C171	VE-30000352	EL CAP.	100UF 16V M
R935	VE-30012662	SMD RES.	1/10W 2.7K J	C172	VE-30016654	SMD CAP.	100NF 16V K R
R936	VE-30000718	CF RES.	1/4W 4.7K J	C173	VE-30000315	SMD CAP.	220NF 25V Z
R937	VE-30000459	CF RES.	1/4W 100R J	C201	VE-30000360	EL CAP.	1000UF 25V M
R938	VE-30012509	SMD RES.	1/10W 100K J	C202	VE-30000106	MKT CAP.	47NF 100V J
R939	VE-30012692	SMD RES.	1/10W 4.7K J	C203	VE-30000099	MKT CAP.	33NF 63V J
R940	VE-30000500	CF RES.	1/4W 12K J	C204	VE-30000345	EL CAP.	10UF 50V M
R941	VE-30000588	SMD RES.	1/10W 220R J	C206	VE-30000315	SMD CAP.	220NF 25V Z
R942	VE-30000588	SMD RES.	1/10W 220R J	C207	VE-30000362	EL CAP.	1UF 50V M
R943	VE-30000471	CF RES.	1/4W 10K J	C208	VE-30000415	EL CAP.	4.7UF 250V M
R944	VE-30012641	SMD RES.	1/10W 10K J	C209	VE-30000224	SMD CAP.	220PF 50V J
R945	VE-30000471	CF RES.	1/4W 10K J	C210	VE-30000149	MKP CAP.	2.7NF 2KV 3.5%
R946	VE-30012657	SMD RES.	1/10W 1K J	C211	VE-30000179	MKP CAP.	9.1NF 1600V 3.5%
R950	VE-30012657	SMD RES.	1/10W 1K J	C212	VE-30000137	MKP CAP.	15NF 630V J
R951	VE-30012657	SMD RES.	1/10W 1K J	C213	VE-30007215	MKP CAP.	1.2UF 250V J
R952	VE-30012657	SMD RES.	1/10W 1K J	C214	VE-30000415	EL CAP.	4.7UF 250V M
R953	VE-30000466	CF RES.	1/4W 1K J	C215	VE-30000166	MKP CAP.	560NF 250V J
R955	VE-30012657	SMD RES.	1/10W 1K J	C216	VE-30000415	EL CAP.	4.7UF 250V M
R956	VE-30012510	SMD RES.	1/10W 100R J	C222	VE-30000431	C CAP.	100PF 1KV M
R957	VE-30012655	SMD RES.	1/10W 180R J	C223	VE-30000351	EL CAP.	10UF 350V M
R958	VE-30014022	SMD RES.	1/10W 47R J	C225	VE-30000359	EL CAP.	1000UF 16V M
R959	VE-30000466	CF RES.	1/4W 1K J	C226	VE-30000356	EL CAP.	1000UF 63V M
R960	VE-30000471	CF RES.	1/4W 10K J	C228	VE-30000360	EL CAP.	1000UF 25V M
R961	VE-30000718	CF RES.	1/4W 4.7K J	C232	VE-30000225	C CAP.	220PF 50V J
R964	VE-30012641	SMD RES.	1/10W 10K J	C240	VE-30000400	EL CAP.	47UF 50V M
R965	VE-30012657	SMD RES.	1/10W 1K J	C250	VE-30000304	SMD CAP.	1.8NF 50V K R
R966	VE-30012641	SMD RES.	1/10W 10K J	C251	VE-30000359	EL CAP.	1000UF 16V M
CAPACITOR							
C100	VE-3000098	MKT CAP.	3.3NF 63V J	C252	VE-30000289	SMD CAP.	10NF 50V K R
C101	VE-30000371	EL CAP.	22UF 50V M	C253	VE-30000294	SMD CAP.	100NF 50V K
C102	VE-30000294	SMD CAP.	100NF 50V K	C254	VE-30000360	EL CAP.	1000UF 25V M
C103	VE-30000294	SMD CAP.	100NF 50V K	C255	VE-30000294	SMD CAP.	100NF 50V K
C104	VE-30012323	MKT CAP.	1NF 100V J	C256	VE-30000092	MKT CAP.	220NF 63V J
C105	VE-30000284	SMD CAP.	1NF 50V K R	C257	VE-30000304	SMD CAP.	1.8NF 50V K R
C106	VE-30000332	SMD CAP.	4.7NF 50V K	C258	VE-30000322	SMD CAP.	3.3NF 50V K

[AV28BH7ENS / AV28BH7ENB]

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C324	VE-30000294	SMD CAP.	100NF 50V K	
C333	VE-30000294	SMD CAP.	100NF 50V K	
C402	VE-30000345	EL CAP.	10UF 50V M	
C403	VE-30000384	EL CAP.	2.2UF 50V M	
C404	VE-30000284	SMD CAP.	1NF 50V K R	
C405	VE-30000284	SMD CAP.	1NF 50V K R	
C406	VE-30000224	SMD CAP.	220PF 50V J	
C407	VE-30000312	SMD CAP.	22NF 50V K	
C408	VE-30000371	EL CAP.	22U 50V M	
C409	VE-30000294	SMD CAP.	100NF 50V K	
C410	VE-30000294	SMD CAP.	100NF 50V K	
C411	VE-30000109	MKT CAP.	470NF 63V J	
C412	VE-30000384	EL CAP.	2.2UF 50V M	
C413	VE-30000294	SMD CAP.	100NF 50V K	
C414	VE-30000294	SMD CAP.	100NF 50V K	
C417	VE-30000294	SMD CAP.	100NF 50V K	
C418	VE-30000294	SMD CAP.	100NF 50V K	
C419	VE-30000294	SMD CAP.	100NF 50V K	
C427	VE-30000294	SMD CAP.	100NF 50V K	
C428	VE-30000294	SMD CAP.	100NF 50V K	
C440	VE-30000400	EL CAP.	47UF 50V M	
C441	VE-30000220	SMD CAP.	22PF 50V J	
C442	VE-30000294	SMD CAP.	100NF 50V K	
C443	VE-30013411	SMD CAP.	180PF 50V J	
C450	VE-30000345	EL CAP.	10U 50V M	
C451	VE-30000294	SMD CAP.	100NF 50V K	
C453	VE-30000355	EL CAP.	100WF 50V M	
C454	VE-30000294	SMD CAP.	100NF 50V K	
C455	VE-30000345	EL CAP.	10U 50V M	
C456	VE-30000352	EL CAP.	100WF 16V M	
C457	VE-30000294	SMD CAP.	100NF 50V K	
C468	VE-30000294	SMD CAP.	100NF 50V K	
C478	VE-30000294	SMD CAP.	100NF 50V K	
C492	VE-30000294	SMD CAP.	100NF 50V K	
C497	VE-30000294	SMD CAP.	100NF 50V K	
C498	VE-30000294	SMD CAP.	100NF 50V K	
C499	VE-30000362	EL CAP.	1UF 50V M	
C500	VE-30000352	EL CAP.	10WF 16V M	
C505	VE-30000294	SMD CAP.	100NF 50V K	
C506	VE-30000345	EL CAP.	10U 50V M	
C509	VE-30000186	SMD CAP.	10PF 50V D	
C510	VE-30000186	SMD CAP.	10PF 50V D	
C511	VE-30000341	SMD CAP.	68NF 50V K	
C610	VE-3000074	MKT CAP.	100N 63V J	
C801	VE-30000362	EL CAP.	1UF 50V M	
C802	VE-30000362	EL CAP.	1UF 50V M	
C803	VE-30000362	EL CAP.	1UF 50V M	
C804	VE-30000409	EL CAP.	470UF 25V M	
C805	VE-30000294	SMD CAP.	100NF 50V K	
C806	VE-30000409	EL CAP.	470UF 25V M	
C807	VE-30000294	SMD CAP.	100NF 50V K	
C808	VE-30000074	MKT CAP.	100NF 63V J	
C809	VE-30000074	MKT CAP.	100NF 63V J	
C819	VE-30000309	SMD CAP.	2.2NF 50V K R	
C820	VE-30000309	SMD CAP.	2.2NF 50V K R	
C821	VE-30000309	SMD CAP.	2.2NF 50V K R	
C822	VE-30000309	SMD CAP.	2.2NF 50V K R	
C900	VE-30000371	EL CAP.	22U 50V M	
C901	VE-30016654	SMD CAP.	100NF 16V K R	
C902	VE-30016654	SMD CAP.	100NF 16V K R	
C903	VE-30016654	SMD CAP.	100NF 16V K R	
C904	VE-30000074	MKT CAP.	100NF 63V J	
C905	VE-30000371	EL CAP.	22U 50V M	
C906	VE-30016654	SMD CAP.	100NF 16V K R	
C907	VE-30000074	MKT CAP.	100NF 63V J	
C908	VE-30016654	SMD CAP.	100NF 16V K R	
C909	VE-30016654	SMD CAP.	100NF 16V K R	
C910	VE-30016654	SMD CAP.	100NF 16V K R	
C911	VE-30000352	EL CAP.	100UF 16V M	
C912	VE-30012569	SMD CAP.	33PF 50V J	
C913	VE-30012569	SMD CAP.	33PF 50V J	
C914	VE-30000371	EL CAP.	22UF 50V M	
C915	VE-30016654	SMD CAP.	100NF 16V K R	
C916	VE-30016654	SMD CAP.	100NF 16V K R	
C917	VE-30016654	SMD CAP.	100NF 16V K R	
C918	VE-30016654	SMD CAP.	100NF 16V K R	
C919	VE-30000375	EL CAP.	220UF 16V M	
C920	VE-30000384	EL CAP.	2.2UF 50V M	
C921	VE-30016654	SMD CAP.	100NF 16V K R	
C926	VE-30016654	SMD CAP.	100NF 16V K R	
C927	VE-30016654	SMD CAP.	100NF 16V K R	
C930	VE-30000345	EL CAP.	10UF 50V M	
C931	VE-30000257	C CAP.	470PF 50V J SL	
C932	VE-30016654	SMD CAP.	100NF 16V K R	
C933	VE-30000294	SMD CAP.	100NF 50V K	

△	Symbol No.	Part No.	Part Name	Description
TRANS F				
△	TR101	VE-30016819	SMPS TRF	
△	TR201	VE-30006743	HORIZONTAL DRIVER TRF	
△	TR202	VE-30016922	FBT TRF	
COIL				
L101	VE-30006712	FERRITE BEAD		
L102	VE-30007775	PFC COIL	1MH 1KHZ 2A	
△	L103	VE-30006744	LINE FILTER	16MH
△	L104	VE-30006744	LINE FILTER	16MH
L106	VE-30006712	FERRITE BEAD		
L107	VE-3001960	FERIT BAR		
L108	VE-3001960	FERIT BAR		
L109	VE-3001960	FERIT BAR		
L201	VE-30007771	FIXED COIL	100UH	
L202	VE-30007757	COIL INJECTION EW	6MH	
L203	VE-30007770	FILTER COIL	1MH	
L204	VE-30012271	LINEARTY COIL	4.3UH	
L205	VE-30007756	BRIDGE COIL	150UH 32KHZ	
L206	VE-30006712	FERRITE BEAD		
L207	VE-30006712	FERRITE BEAD		
L304	VE-3001992	FIXED COIL	10UH Q65 K-A	
L401	VE-3001986	FIXED COIL	3.3UH Q65 K	
L403	VE-3001979	FIXED COIL	1UH Q45 M-A	
L405	VE-3001987	FIXED COIL	4.7UH Q70 K-A	
L420	VE-3001996	FIXED COIL	22UH Q40 K	
L421	VE-3001992	FIXED COIL	10UH Q65 K-A	
L422	VE-3001994	FIXED COIL	22UH J AXIAL	
L423	VE-3001994	FIXED COIL	22UH J AXIAL	
L425	VE-3001971	FERRITE BEAD		
L801	VE-30002170	COIL FTZ/RAD		
L802	VE-30002170	COIL FTZ/RAD		
L900	VE-3001992	FIXED COIL	10UH Q65 K-A	
L901	VE-3001992	FIXED COIL	10UH Q65 K-A	
L902	VE-3001992	FIXED COIL	10UH Q65 K-A	
L903	VE-3001992	FIXED COIL	10UH Q65 K-A	
L904	VE-3001987	FIXED COIL	4.7UH Q70 K-A	
L905	VE-3001984	FIXED COIL	2.2UH Q55 M-A	
L906	VE-30002171	CHOKE PEAKING COIL	22UH K	
DIODE				
D101	VE-30001285	DIODE		
D102	VE-30001291	DIODE		
D103	VE-30007768	DIODE		
D104	VE-30007768	DIODE		
D105	VE-30007768	DIODE		
D106	VE-30007758	BRIDGE DIODE		
D108	VE-30001318	DIODE		
D109	VE-30009699	ZENER DIODE		
D110	VE-20063054	DIODE		
D111	VE-30001299	DIODE		
D112	VE-30001302	DIODE		
D113	VE-30001302	DIODE		
D114	VE-30001302	DIODE		
D115	VE-30001285	DIODE		
D116	VE-30007760	ZENER DIODE		
D117	VE-30001285	DIODE		
D118	VE-30007760	ZENER DIODE		
D119	VE-30001284	DIODE		
D120	VE-30001291	DIODE		
D121	VE-30001318	DIODE		
D122	VE-30001318	DIODE		
D123	VE-30001285	DIODE		
D126	VE-30001284	DIODE		
D127	VE-30001284	DIODE		
D128	VE-30001284	DIODE		
D201	VE-30001291	DIODE		
D202	VE-30001285	DIODE		
D203	VE-30007760	ZENER DIODE		
D205	VE-30007763	ZENER DIODE		
D206	VE-30007678	DIODE GUC		
D207	VE-30007768	DIODE		
D208	VE-30001291	DIODE		
D209	VE-30001291	DIODE		
D210	VE-30001299	DIODE		
D211	VE-30001299	DIODE		
D212	VE-30001291	DIODE		
D213	VE-30001291	DIODE		
D214	VE-30007763	ZENER DIODE		
D215	VE-30007762	ZENER DIODE		
D216	VE-30001285	DIODE		

[AV28BH7ENS / AV28BH7ENB]

△	Symbol No.	Part No.	Part Name	Description
DIODE				
	D218	VE-30001291	DIODE	
	D219	VE-30001291	DIODE	
	D220	VE-30001284	DIODE	
	D221	VE-30001284	DIODE	
	D222	VE-30001284	DIODE	
	D223	VE-30001285	DIODE	
	D224	VE-30001285	DIODE	
	D225	VE-30001318	DIODE	
	D403	VE-30001285	DIODE	
	D900	VE-30012412	ZENER DIODE	
	D901	VE-30007761	ZENER DIODE	
TRANSISTOR				
	Q101	VE-30007801	TR	
	Q103	VE-30007802	TR	
	Q104	VE-30007798	TR	
	Q105	VE-30007798	TR	
	Q106	VE-30007802	TR	
	Q107	VE-30007798	TR	
	Q108	VE-30007798	TR	
	Q109	VE-30001457	TR	
	Q110	VE-30001457	TR	
	Q112	VE-30001454	TR	
	Q113	VE-30001428	TR	
	Q201	VE-30007802	TR	
	Q202	VE-30016686	TR	
	Q203	VE-30001458	TR	
	Q204	VE-30001458	TR	
	Q205	VE-30007799	TR	
	Q206	VE-30001457	TR	
	Q207	VE-30001457	TR	
	Q208	VE-30001455	TR	
	Q403	VE-30001457	TR	
	Q408	VE-30007800	TR	
	Q415	VE-30001457	TR	
	Q801	VE-30001457	TR	
	Q802	VE-30001457	TR	
	Q900	VE-30001458	TR	
	Q901	VE-30001457	TR	
	Q902	VE-30001457	TR	
	Q903	VE-30001457	TR	
	Q904	VE-30001457	TR	
	Q905	VE-30001457	TR	
	Q906	VE-30001457	TR	
	Q907	VE-30001457	TR	
	Q908	VE-30001457	TR	
	Q909	VE-30001458	TR	
	Q910	VE-30001457	TR	
	Q911	VE-30001457	TR	
IC				
△	IC101	VE-30007442	IC	
△	IC102	VE-30015087	IC	
	IC103	VE-30001506	IC	
	IC104	VE-30007444	IC	
	IC105	VE-30001500	IC	
	IC106	VE-30001668	IC	
	IC201	VE-30007793	IC	
	IC202	VE-30001506	IC	
	IC302	VE-30015382	IC(MEMORY)	
	IC304	VE-30016491	IC	
	IC401	VE-30001495	IC	
	IC801	VE-30007794	IC	
	IC802	VE-30007794	IC	
	IC900	VE-30013571	IC(MYCOM)	
OTHERS				
△	F101	VE-20000849	FUSE ASSY	3.15A
△	F102	VE-30009037	FUSE	6.3A
△	F103	VE-30009037	FUSE	6.3A
	RL2	VE-30002183	RELAY	
	S133	VE-30000575	SMD RES.	1/10W 2K J
	T401	VE-30001724	SER FILTER	
	TU401	VE-30009637	TUNER	
	VL401	VE-30002037	ADJ COIL VIF	38.9 080
	VR127	VE-30001041	ADJ RES.	0.15W 1K M
	X900	VE-30006662	XTAL	6MHZ
	Z401	VE-30001706	SAW FILTER	
	Z403	VE-30001692	SAW FILTER	

△	Symbol No.	Part No.	Part Name	Description
MULTISOUND P.W. BOARD ASS'Y(VE-30017302)				
RESISTOR				
	R501	VE-30000475	SMD RES.	1/10W 10K J
	R502	VE-30000475	SMD RES.	1/10W 10K J
	R503	VE-30000459	CF RES.	1/4W 100R J
	R504	VE-30000459	CF RES.	1/4W 100R J
	R505	VE-30000464	SMD RES.	1/10W 100R J
	R506	VE-30000721	SMD RES.	1/10W 4.7K J
	R507	VE-30000626	SMD RES.	1/10W 270R J
	R508	VE-30000464	SMD RES.	1/10W 100R J
	R509	VE-30000464	SMD RES.	1/10W 100R J
	R510	VE-30000464	SMD RES.	1/10W 100R J
	R511	VE-30000464	SMD RES.	1/10W 100R J
	R512	VE-30000469	SMD RES.	1/10W 1K J
	R513	VE-30000466	CF RES.	1/4W 1K J
	R516	VE-30000469	SMD RES.	1/10W 1K J
	R517	VE-30000469	SMD RES.	1/10W 1K J
	R518	VE-30000469	SMD RES.	1/10W 1K J
	R519	VE-30000469	SMD RES.	1/10W 1K J
	R520	VE-30000469	SMD RES.	1/10W 1K J
	R521	VE-30000469	SMD RES.	1/10W 1K J
	R522	VE-30000469	SMD RES.	1/10W 1K J
	R523	VE-30000469	SMD RES.	1/10W 1K J
	R524	VE-30000797	SMD RES.	1/10W 75R J
	R525	VE-30000797	SMD RES.	1/10W 75R J
	R529	VE-30000797	SMD RES.	1/10W 75R J
	R532	VE-30000459	CF RES.	1/4W 100R J
	R533	VE-30000459	CF RES.	1/4W 100R J
△	R535	VE-30001207	FUSE RES.	1/4W 10R J
	R536	VE-30000797	SMD RES.	1/10W 75R J
	R538	VE-30000457	SMD RES.	1/10W 10R J
	R539	VE-30000452	CF RES.	1/4W 10R J
	R540	VE-30000457	SMD RES.	1/10W 10R J
	R541	VE-30000717	SMD RES.	1/10W 470R J
	R542	VE-30000475	SMD RES.	1/10W 10K J
	R543	VE-30000721	SMD RES.	1/10W 4.7K J
	R544	VE-30000717	SMD RES.	1/10W 470R J
	R545	VE-30000475	SMD RES.	1/10W 10K J
	R546	VE-30000712	CF RES.	1/4W 470R J
	R547	VE-30000475	SMD RES.	1/10W 10K J
	R548	VE-30000717	SMD RES.	1/10W 470R J
	R549	VE-30000475	SMD RES.	1/10W 10K J
	R550	VE-30000721	SMD RES.	1/10W 4.7K J
	R551	VE-30000721	SMD RES.	1/10W 4.7K J
	R552	VE-30000452	CF RES.	1/4W 10R J
	R553	VE-30000721	SMD RES.	1/10W 4.7K J
	R555	VE-30000797	SMD RES.	1/10W 75R J
	R556	VE-30000792	CF RES.	1/4W 75R J
	R557	VE-30000792	CF RES.	1/4W 75R J
	R558	VE-30000792	CF RES.	1/4W 75R J
	R559	VE-30000457	SMD RES.	1/10W 10R J
	R560	VE-30000717	SMD RES.	1/10W 470R J
	R561	VE-30000475	SMD RES.	1/10W 10K J
	R562	VE-30000721	SMD RES.	1/10W 4.7K J
	R563	VE-30000792	CF RES.	1/4W 75R J
	R572	VE-30000721	SMD RES.	1/10W 4.7K J
	R573	VE-30000721	SMD RES.	1/10W 4.7K J
	R574	VE-30000721	SMD RES.	1/10W 4.7K J
	R575	VE-30000721	SMD RES.	1/10W 4.7K J
	R576	VE-30000797	SMD RES.	1/10W 75R J
	R577	VE-30000480	SMD RES.	1/10W 100K J
	R578	VE-30000480	SMD RES.	1/10W 100K J
	R579	VE-30000797	SMD RES.	1/10W 75R J
	R580	VE-30000588	SMD RES.	1/10W 220R J
	R581	VE-30000588	SMD RES.	1/10W 220R J
	R582	VE-30000583	CF RES.	1/4W 220R J
	R583	VE-30000508	SMD RES.	1/10W 12K J
	R584	VE-30000636	SMD RES.	1/10W 27K J
	R585	VE-30000503	SMD RES.	1/10W 12K J
	R586	VE-30000636	SMD RES.	1/10W 27K J
	R587	VE-30000469	SMD RES.	1/10W 1K J
	R588	VE-30000469	SMD RES.	1/10W 1K J
	R589	VE-30000457	SMD RES.	1/10W 10R J
	R590	VE-30000469	SMD RES.	1/10W 1K J
	R591	VE-30000457	SMD RES.	1/10W 10R J
	R592	VE-30000464	SMD RES.	1/10W 100R J
	R593	VE-30000469	SMD RES.	1/10W 1K J
	R594	VE-30000469	SMD RES.	1/10W 1K J
	R595	VE-30000457	SMD RES.	1/10W 10R J
	R596	VE-30000717	SMD RES.	1/10W 470R J
	R597	VE-30000475	SMD RES.	1/10W 10K J
	R598	VE-30000721	SMD RES.	1/10W 4.7K J
	R599	VE-30000797	SMD RES.	1/10W 75R J
	R600	VE-30000475	SMD RES.	1/10W 10K J
	R613	VE-30001231	FUSE RES.	27R 1/4W J
	R614	VE-30000797	SMD RES.	1/10W 75R J

[AV28BH7ENS / AV28BH7ENB]

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C501	VE-30000407	EL CAP.	470UF 16V M	
C502	VE-30000294	SMD CAP.	100NF 50V K	
C504	VE-30000352	EL CAP.	100UF 16V M	
C505	VE-30000407	EL CAP.	470UF 16V M	
C507	VE-30000284	SMD CAP.	1NF 50V K R	
C508	VE-30000284	SMD CAP.	1NF 50V K R	
C509	VE-30000252	SMD CAP.	47PF 50V J	
C510	VE-30000252	SMD CAP.	47PF 50V J	
C511	VE-30000332	SMD CAP.	4.7NF 50V K	
C512	VE-30000332	SMD CAP.	4.7NF 50V K	
C513	VE-30000332	SMD CAP.	4.7NF 50V K	
C514	VE-30000332	SMD CAP.	4.7NF 50V K	
C516	VE-30000371	EL CAP.	22UF 50V M	
C517	VE-30000294	SMD CAP.	100NF 50V K	
C521	VE-30000371	EL CAP.	22UF 50V M	
C522	VE-30000109	MKT CAP.	470NF 63V J	
C523	VE-30000109	MKT CAP.	470NF 63V J	
C524	VE-30000109	MKT CAP.	470NF 63V J	
C525	VE-30000109	MKT CAP.	470NF 63V J	
C526	VE-30000265	SMD CAP.	560PF 50V J	
C527	VE-30000109	MKT CAP.	470NF 63V J	
C528	VE-30000109	MKT CAP.	470NF 63V J	
C529	VE-30000294	SMD CAP.	100NF 50V K	
C530	VE-30000393	EL CAP.	3.3UF 50V M	
C531	VE-30000345	EL CAP.	10UF 50V M	
C532	VE-30000345	EL CAP.	10UF 50V M	
C533	VE-30000345	EL CAP.	10UF 50V M	
C534	VE-30000284	SMD CAP.	1NF 50V K R	
C535	VE-30000284	SMD CAP.	1NF 50V K R	
C536	VE-30000216	SMD CAP.	1.8PF 50V J	
C537	VE-30000216	SMD CAP.	1.8PF 50V J	
C538	VE-30000284	SMD CAP.	1NF 50V K R	
C539	VE-30000284	SMD CAP.	1NF 50V K R	
C540	VE-30000284	SMD CAP.	1NF 50V K R	
C541	VE-30000284	SMD CAP.	1NF 50V K R	
C542	VE-30000263	SMD CAP.	.56PF 50V J	
C543	VE-30000294	SMD CAP.	100NF 50V K	
C544	VE-30000294	SMD CAP.	100NF 50V K	
C545	VE-30000284	SMD CAP.	1NF 50V K R	
C546	VE-30000284	SMD CAP.	1NF 50V K R	
C547	VE-30000284	SMD CAP.	1NF 50V K R	
C548	VE-30000284	SMD CAP.	1NF 50V K R	
C549	VE-30000294	SMD CAP.	100NF 50V K	
C550	VE-30000294	SMD CAP.	100NF 50V K	
C551	VE-30000407	EL CAP.	470UF 16V M	
C552	VE-30000407	EL CAP.	470UF 16V M	
C553	VE-30000204	SMD CAP.	150PF 50V J	
C554	VE-30000204	SMD CAP.	150PF 50V J	
C556	VE-30000352	EL CAP.	100NF 16V M	
C557	VE-30000332	SMD CAP.	4.7NF 50V K	
C558	VE-30000332	SMD CAP.	4.7NF 50V K	
C560	VE-30000074	MKT CAP.	100NF 63V J	
C561	VE-30000247	SMD CAP.	39PF 50V J	
C562	VE-30000247	SMD CAP.	39PF 50V J	
C563	VE-30000294	SMD CAP.	100NF 50V K	
C564	VE-30000332	SMD CAP.	4.7NF 50V K	
C565	VE-30000332	SMD CAP.	4.7NF 50V K	
C566	VE-30000074	MKT CAP.	100NF 63V J	
C567	VE-30000074	MKT CAP.	100NF 63V J	
C569	VE-30000074	MKT CAP.	100NF 63V J	
C576	VE-30000074	MKT CAP.	100NF 63V J	
C582	VE-30000092	MKT CAP.	220NF 63V J	
C583	VE-30000204	SMD CAP.	150PF 50V J	
C584	VE-30000204	SMD CAP.	150PF 50V J	
C585	VE-30000092	MKT CAP.	220NF 63V J	
C586	VE-30000092	MKT CAP.	220NF 63V J	
C587	VE-30000092	MKT CAP.	220NF 63V J	
C590	VE-30000332	SMD CAP.	4.7NF 50V K	
C591	VE-30000332	SMD CAP.	4.7NF 50V K	
C592	VE-30000092	MKT CAP.	220NF 63V J	
C612	VE-30000204	SMD CAP.	150PF 50V J	
C614	VE-30000294	SMD CAP.	100NF 50V K	
C615	VE-30000284	SMD CAP.	1NF 50V K R	
C616	VE-30000294	SMD CAP.	100NF 50V K	
C617	VE-30000294	SMD CAP.	100NF 50V K	
C618	VE-30000294	SMD CAP.	100NF 50V K	
C619	VE-30000294	SMD CAP.	100NF 50V K	
C620	VE-30000092	MKT CAP.	220NF 63V J	
C623	VE-30000371	EL CAP.	22UF 50V M	
C624	VE-30000371	EL CAP.	22UF 50V M	
C626	VE-30000371	EL CAP.	22UF 50V M	
C627	VE-30000371	EL CAP.	22UF 50V M	
C628	VE-30000371	EL CAP.	22UF 50V M	
C629	VE-30000371	EL CAP.	22UF 50V M	

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C630	VE-30000294	SMD CAP.	100NF 50V K	
C631	VE-30000237	SMD CAP.	33PF 50V J	
C632	VE-30000237	SMD CAP.	33PF 50V J	
C633	VE-30000237	SMD CAP.	33PF 50V J	
C634	VE-30000237	SMD CAP.	33PF 50V J	
C635	VE-30000232	SMD CAP.	270PF 50V J	
C636	VE-30000256	SMD CAP.	470PF 50V J	
C637	VE-30000237	SMD CAP.	33PF 50V J	
C638	VE-30000289	SMD CAP.	10NF 50V K R	
C640	VE-30000332	SMD CAP.	4.7NF 50V K	
C641	VE-30000332	SMD CAP.	4.7NF 50V K	
C643	VE-30000294	SMD CAP.	100NF 50V K	
C644	VE-30000294	SMD CAP.	100NF 50V K	
COIL				
L501	VE-3001996	FIXED COIL	22UH Q40 K	
L502	VE-3001996	FIXED COIL	22UH Q40 K	
L503	VE-3001996	FIXED COIL	22UH Q40 K	
L504	VE-3001996	FIXED COIL	22UH Q40 K	
L505	VE-3001996	FIXED COIL	22UH Q40 K	
L506	VE-3001996	FIXED COIL	22UH Q40 K	
L507	VE-3001996	FIXED COIL	22UH Q40 K	
L508	VE-3001996	FIXED COIL	22UH Q40 K	
L509	VE-3001996	FIXED COIL	22UH Q40 K	
L510	VE-3001996	FIXED COIL	22UH Q40 K	
L513	VE-3001996	FIXED COIL	22UH Q40 K	
L514	VE-3001996	FIXED COIL	22UH Q40 K	
L515	VE-3001996	FIXED COIL	22UH Q40 K	
L516	VE-3001996	FIXED COIL	22UH Q40 K	
L517	VE-3001996	FIXED COIL	22UH Q40 K	
L520	VE-30013413	FERRITE BEAD		
L521	VE-30013413	FERRITE BEAD		
L522	VE-30013413	FERRITE BEAD		
L523	VE-30013413	FERRITE BEAD		
L524	VE-30013413	FERRITE BEAD		
L525	VE-30013413	FERRITE BEAD		
L526	VE-30013413	FERRITE BEAD		
L527	VE-30013413	FERRITE BEAD		
L533	VE-30013413	FERRITE BEAD		
L534	VE-30013413	FERRITE BEAD		
L535	VE-30013413	FERRITE BEAD		
L536	VE-30010964	FERRITE BEAD		
L537	VE-30010964	FERRITE BEAD		
DIODE				
D501	VE-30001369	ZENER DIODE		
D502	VE-30001284	DIODE		
D504	VE-30001285	DIODE		
D505	VE-30001285	DIODE		
TRANSISTOR				
Q501	VE-30001458	TR		
Q502	VE-30001457	TR		
Q503	VE-30001457	TR		
Q504	VE-30001457	TR		
Q505	VE-30001457	TR		
Q506	VE-30001457	TR		
Q507	VE-30001457	TR		
Q508	VE-30001457	TR		
Q509	VE-30001457	TR		
Q510	VE-30001457	TR		
Q511	VE-30001457	TR		
Q512	VE-30001457	TR		
Q513	VE-30001457	TR		
Q514	VE-30001457	TR		
Q515	VE-30001457	TR		
IC				
IC501	VE-30001664	IC		
IC502	VE-30001619	IC		
IC504	VE-30001349	ZENER DIODE	11V	
OTHERS				
X501	VE-30001756	XTAL		

[AV28BH7ENS / AV28BH7ENB]

FEATURE BOX P.W. BOARD ASS'Y (VE-30013755)

△ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R001	VE-30000659	SMD RES.	1/10W 330R J
R002	VE-30000464	SMD RES.	1/10W 100R J
R003	VE-30000688	SMD RES.	1/10W 390R J
R004	VE-30006462	SMD RES.	1/10W 22R J
R005	VE-30000653	SMD RES.	1/10W 33R J
R006	VE-30000588	SMD RES.	1/10W 220R J
R007	VE-30000469	SMD RES.	1/10W 1K J
R008	VE-30000659	SMD RES.	1/10W 330R J
R009	VE-30000659	SMD RES.	1/10W 330R J
R010	VE-30000659	SMD RES.	1/10W 330R J
R011	VE-30000659	SMD RES.	1/10W 330R J
R012	VE-30000659	SMD RES.	1/10W 330R J
R013	VE-30000659	SMD RES.	1/10W 330R J
R014	VE-30000659	SMD RES.	1/10W 330R J
R015	VE-30000659	SMD RES.	1/10W 330R J
R016	VE-30000659	SMD RES.	1/10W 330R J
R017	VE-30000659	SMD RES.	1/10W 330R J
R018	VE-30000659	SMD RES.	1/10W 330R J
R021	VE-30000659	SMD RES.	1/10W 330R J
R024	VE-30000797	SMD RES.	1/10W 75R J
R026	VE-30000797	SMD RES.	1/10W 75R J
R028	VE-30000797	SMD RES.	1/10W 75R J
R030	VE-30000797	SMD RES.	1/10W 75R J
R031	VE-30000833	SMD RES.	1/10W 91R J
R032	VE-30000524	SMD RES.	1/10W 150R J
R033	VE-30000475	SMD RES.	1/10W 10K J
R034	VE-30000469	SMD RES.	1/10W 1K J
R047	VE-30000797	SMD RES.	1/10W 75R J
R048	VE-30006462	SMD RES.	1/10W 22R J
R050	VE-30000597	SMD RES.	1/10W 22K J
R053	VE-30000797	SMD RES.	1/10W 75R J
R054	VE-30000797	SMD RES.	1/10W 75R J
R055	VE-30000797	SMD RES.	1/10W 75R J
R056	VE-30000797	SMD RES.	1/10W 75R J
R057	VE-30000797	SMD RES.	1/10W 75R J
R058	VE-30000797	SMD RES.	1/10W 75R J
R059	VE-30000797	SMD RES.	1/10W 75R J
R074	VE-30000721	SMD RES.	1/10W 4.7K J
R075	VE-30000721	SMD RES.	1/10W 4.7K J
R076	VE-30000721	SMD RES.	1/10W 4.7K J
R079	VE-30000464	SMD RES.	1/10W 100R J
R080	VE-30000688	SMD RES.	1/10W 390R J
R081	VE-30006462	SMD RES.	1/10W 22R J
R082	VE-30000797	SMD RES.	1/10W 75R J
R083	VE-30000588	SMD RES.	1/10W 220R J
R084	VE-30000469	SMD RES.	1/10W 1K J
R085	VE-30000464	SMD RES.	1/10W 100R J
R086	VE-30000688	SMD RES.	1/10W 390R J
R087	VE-30006462	SMD RES.	1/10W 22R J
R088	VE-30000797	SMD RES.	1/10W 75R J
R089	VE-30000588	SMD RES.	1/10W 220R J
R090	VE-30000469	SMD RES.	1/10W 1K J
R091	VE-30000464	SMD RES.	1/10W 100R J
R092	VE-30000688	SMD RES.	1/10W 390R J
R093	VE-30006462	SMD RES.	1/10W 22R J
R094	VE-30000797	SMD RES.	1/10W 75R J
R095	VE-30000588	SMD RES.	1/10W 220R J
R096	VE-30000469	SMD RES.	1/10W 1K J
R098	VE-30000597	SMD RES.	1/10W 22K J
R099	VE-30000626	SMD RES.	1/10W 270R J
R100	VE-30000475	SMD RES.	1/10W 10K J
R101	VE-30000593	SMD RES.	1/10W 2.2K J
R105	VE-30000475	SMD RES.	1/10W 10K J
R106	VE-30000664	SMD RES.	1/10W 3.3K J
R107	VE-30000475	SMD RES.	1/10W 10K J
R108	VE-30000475	SMD RES.	1/10W 10K J
R110	VE-30000534	SMD RES.	1/10W 15K J
R111	VE-30000534	SMD RES.	1/10W 15K J
R112	VE-30000593	SMD RES.	1/10W 2.2K J
R117	VE-30000475	SMD RES.	1/10W 10K J
R119	VE-30000475	SMD RES.	1/10W 10K J
R120	VE-30000469	SMD RES.	1/10W 1K J
R121	VE-30006462	SMD RES.	1/10W 22R J
R122	VE-30000588	SMD RES.	1/10W 220R J
R125	VE-30000659	SMD RES.	1/10W 330R J
R126	VE-30000659	SMD RES.	1/10W 330R J
R127	VE-30000659	SMD RES.	1/10W 330R J
R128	VE-30000659	SMD RES.	1/10W 330R J
R129	VE-30000659	SMD RES.	1/10W 330R J
R130	VE-30000659	SMD RES.	1/10W 330R J
R131	VE-30000659	SMD RES.	1/10W 330R J
R132	VE-30000659	SMD RES.	1/10W 330R J
R133	VE-30000659	SMD RES.	1/10W 330R J

△ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R134	VE-30000659	SMD RES.	1/10W 330R J
R135	VE-30000659	SMD RES.	1/10W 330R J
R136	VE-30000659	SMD RES.	1/10W 330R J
R137	VE-30000659	SMD RES.	1/10W 330R J
R138	VE-30000659	SMD RES.	1/10W 330R J
R140	VE-30000797	SMD RES.	1/10W 75R J
R141	VE-30000659	SMD RES.	1/10W 330R J
R142	VE-30000659	SMD RES.	1/10W 330R J
R143	VE-30000659	SMD RES.	1/10W 330R J
R144	VE-30000659	SMD RES.	1/10W 330R J
R145	VE-30000659	SMD RES.	1/10W 330R J
R149	VE-30000534	SMD RES.	1/10W 15K J
R150	VE-30000797	SMD RES.	1/10W 75R J
R151	VE-30000797	SMD RES.	1/10W 75R J
R152	VE-30000797	SMD RES.	1/10W 75R J
R153	VE-30000797	SMD RES.	1/10W 75R J
R154	VE-30000797	SMD RES.	1/10W 75R J
R155	VE-30000464	SMD RES.	1/10W 100R J
R156	VE-30000464	SMD RES.	1/10W 100R J
R157	VE-30000464	SMD RES.	1/10W 100R J
R158	VE-30000464	SMD RES.	1/10W 100R J
R159	VE-30000464	SMD RES.	1/10W 100R J
R161	VE-30000464	SMD RES.	1/10W 100R J
R162	VE-30000464	SMD RES.	1/10W 100R J
R163	VE-30000464	SMD RES.	1/10W 100R J
R164	VE-30000464	SMD RES.	1/10W 100R J
R165	VE-30000721	SMD RES.	1/10W 4.7K J

CAPACITOR

C001	VE-30000309	SMD CAP.	2.2NF 50V K R
C002	VE-30000294	SMD CAP.	100NF 50V K
C003	VE-30000334	SMD CAP.	47NF 50V K
C004	VE-30000309	SMD CAP.	2.2NF 50V K R
C005	VE-30000186	SMD CAP.	10PF 50V D 0G
C006	VE-30000186	SMD CAP.	10PF 50V D 0G
C007	VE-30000232	SMD CAP.	270PF 50V J
C008	VE-30000265	SMD CAP.	560PF 50V J
C009	VE-30000309	SMD CAP.	2.2NF 50V K R
C010	VE-30000232	SMD CAP.	270PF 50V J
C011	VE-30000265	SMD CAP.	560PF 50V J
C012	VE-30000309	SMD CAP.	2.2NF 50V K R
C013	VE-30000232	SMD CAP.	270PF 50V J
C014	VE-30000265	SMD CAP.	560PF 50V J
C015	VE-30000309	SMD CAP.	2.2NF 50V K R
C016	VE-30000232	SMD CAP.	270PF 50V J
C017	VE-30000265	SMD CAP.	560PF 50V J
C018	VE-30000309	SMD CAP.	2.2NF 50V K R
C019	VE-30000309	SMD CAP.	2.2NF 50V K R
C020	VE-30000294	SMD CAP.	100NF 50V K
C021	VE-30000345	EL CAP.	10UF 50V M
C022	VE-30000345	EL CAP.	10UF 50V M
C024	VE-30000345	EL CAP.	10UF 50V M
C026	VE-30000345	EL CAP.	10UF 50V M
C027	VE-30000345	EL CAP.	10UF 50V M
C028	VE-30000345	EL CAP.	10UF 50V M
C029	VE-30000242	SMD CAP.	330PF 50V J
C030	VE-30010560	SMD CAP.	220NF 25V K R
C031	VE-30000242	SMD CAP.	330PF 50V J
C032	VE-30010560	SMD CAP.	220NF 25V K R
C033	VE-30000242	SMD CAP.	330PF 50V J
C034	VE-30010560	SMD CAP.	220NF 25V K R
C035	VE-30000109	MKT CAP.	470NF 63V J
C036	VE-30000345	EL CAP.	10UF 50V M
C037	VE-30000345	EL CAP.	10UF 50V M
C038	VE-30000289	SMD CAP.	10NF 50V K R
C039	VE-30000371	EL CAP.	22UF 50V M
C040	VE-30000392	EL CAP.	0.33UF 50V M
C041	VE-30000371	EL CAP.	22UF 50V M
C042	VE-30000392	EL CAP.	0.33UF 50V M
C043	VE-30000392	EL CAP.	0.33UF 50V M
C045	VE-30000294	SMD CAP.	100NF 50V K
C046	VE-30000294	SMD CAP.	100NF 50V K
C047	VE-30000294	SMD CAP.	100NF 50V K
C048	VE-30000232	SMD CAP.	270PF 50V J
C049	VE-30000265	SMD CAP.	560PF 50V J
C050	VE-30000309	SMD CAP.	2.2NF 50V K R
C051	VE-30000232	SMD CAP.	270PF 50V J
C052	VE-30000265	SMD CAP.	560PF 50V J
C053	VE-30000309	SMD CAP.	2.2NF 50V K R
C054	VE-30000228	SMD CAP.	27PF 50V J CH
C055	VE-30000228	SMD CAP.	27PF 50V J CH

[AV28BH7ENS / AV28BH7ENB]

△ Symbol No.	Part No.	Part Name	Description
CAPACITOR			

C056	VE-3000232	SMD CAP.	270PF 50V J
C057	VE-3000265	SMD CAP.	560PF 50V J
C058	VE-3000309	SMD CAP.	2.2NF 50V K R
C059	VE-3000284	SMD CAP.	1NF 50V K R
C060	VE-3000289	SMD CAP.	10NF 50V K R
C061	VE-3000294	SMD CAP.	100NF 50V K
C062	VE-3000294	SMD CAP.	100NF 50V K
C063	VE-3000289	SMD CAP.	10NF 50V K R
C064	VE-3000289	SMD CAP.	10NF 50V K R
C065	VE-3000289	SMD CAP.	10NF 50V K R
C066	VE-3000289	SMD CAP.	10NF 50V K R
C067	VE-3000289	SMD CAP.	10NF 50V K R
C068	VE-3000294	SMD CAP.	100NF 50V K
C069	VE-3000289	SMD CAP.	10NF 50V K R
C070	VE-3000289	SMD CAP.	10NF 50V K R
C071	VE-3000289	SMD CAP.	10NF 50V K R
C072	VE-3000309	SMD CAP.	2.2NF 50V K R
C073	VE-3000265	SMD CAP.	560PF 50V J
C074	VE-3000345	EL CAP.	10UF 50V M
C075	VE-3000345	EL CAP.	10UF 50V M
C076	VE-3000345	EL CAP.	10UF 50V M
C077	VE-3000345	EL CAP.	10UF 50V M
C078	VE-3000109	MKT CAP.	470NF 63V J
C079	VE-3000109	MKT CAP.	470NF 63V J
C080	VE-3000345	EL CAP.	10UF 50V M
C081	VE-3000345	EL CAP.	10UF 50V M
C082	VE-3000345	EL CAP.	10UF 50V M
C083	VE-3000294	SMD CAP.	100NF 50V K
C084	VE-3000186	SMD CAP.	10PF 50V D QG
C085	VE-3000232	SMD CAP.	270PF 50V J
C086	VE-3000309	SMD CAP.	2.2NF 50V K R
C087	VE-3000265	SMD CAP.	560PF 50V J
C088	VE-3000232	SMD CAP.	270PF 50V J
C089	VE-3000232	SMD CAP.	270PF 50V J
C090	VE-3000265	SMD CAP.	560PF 50V J
C091	VE-3000309	SMD CAP.	2.2NF 50V K R
C092	VE-3000309	SMD CAP.	2.2NF 50V K R
C093	VE-3000265	SMD CAP.	560PF 50V J
C094	VE-3000232	SMD CAP.	270PF 50V J
C095	VE-3000232	SMD CAP.	270PF 50V J
C096	VE-3000265	SMD CAP.	560PF 50V J
C097	VE-3000309	SMD CAP.	2.2NF 50V K R
C098	VE-3000345	EL CAP.	10UF 50V M
C099	VE-3000345	EL CAP.	10UF 50V M
C100	VE-3000393	EL CAP.	3.3UF 50V M
C101	VE-3000392	EL CAP.	0.33UF 50V M
C102	VE-3000345	EL CAP.	10UF 50V M
C103	VE-3000289	SMD CAP.	10NF 50V K R
C104	VE-3000284	SMD CAP.	1NF 50V K R
C105	VE-3000294	SMD CAP.	100NF 50V K
C106	VE-3000294	SMD CAP.	100NF 50V K
C107	VE-3000186	SMD CAP.	10PF 50V D QG
C108	VE-3000345	EL CAP.	10UF 50V M
C109	VE-3000294	SMD CAP.	100NF 50V K
C110	VE-3000186	SMD CAP.	10PF 50V D QG
C111	VE-3000186	SMD CAP.	10PF 50V D QG
C112	VE-3000284	SMD CAP.	1NF 50V K R
C113	VE-3000242	SMD CAP.	330PF 50V J
C25	VE-3000109	MKT CAP.	470NF 63V J

COIL

L001	VE-30001992	FIXED COIL	10UH 065 K-A
L002	VE-30001992	FIXED COIL	10UH 065 K-A
L003	VE-30001992	FIXED COIL	10UH 065 K-A
L004	VE-30001986	FIXED COIL	3.3UH 065 K
L005	VE-30001986	FIXED COIL	3.3UH 065 K
L006	VE-30001996	FIXED COIL	22UH 040 K
L007	VE-30001986	FIXED COIL	3.3UH 065 K
L008	VE-30001986	FIXED COIL	3.3UH 065 K
L009	VE-30001986	FIXED COIL	3.3UH 065 K
L010	VE-30001986	FIXED COIL	3.3UH 065 K

DIODE

D001	VE-30001284	DIODE	
D002	VE-30001284	DIODE	
D003	VE-30001284	DIODE	

△ Symbol No.	Part No.	Part Name	Description
TRANSISTOR			

Q001	VE-30001454	TR	
Q002	VE-30001454	TR	
Q003	VE-30001455	TR	
Q004	VE-30001454	TR	
Q005	VE-30001454	TR	
Q006	VE-30001455	TR	
Q007	VE-30001454	TR	
Q008	VE-30001454	TR	
Q009	VE-30001455	TR	
Q010	VE-30001454	TR	
Q011	VE-30001454	TR	
Q012	VE-30001455	TR	
Q013	VE-30001454	TR	
Q014	VE-30001454	TR	
Q015	VE-30001454	TR	

IC

IC001	VE-30010350	IC	
IC002	VE-30010348	IC	
IC003	VE-30007668	IC	
IC004	VE-30007739	IC	
IC005	VE-30010349	IC	

OTHERS

X001	VE-30008778	XTAL	
X002	VE-30008782	XTAL	
Z1	VE-3001962	FERRITE	
Z10	VE-3001962	FERRITE	
Z14	VE-3001962	FERRITE	
Z18	VE-3001962	FERRITE	
Z24	VE-3001962	FERRITE	
Z25	VE-3001962	FERRITE	
Z26	VE-3001962	FERRITE	
Z37	VE-3001962	FERRITE	
Z38	VE-3001962	FERRITE	

CRT SOCKET P.W. BOARD ASS'Y (VE-30017303)

△ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R901	VE-30000499	SMD RES.	1/10W 1.2K J
R902	VE-30017132	MF RES.	51K 1W F
R903	VE-30000499	SMD RES.	1/10W 1.2K J
R904	VE-30000524	SMD RES.	1/10W 150R J
R905	VE-30001192	MO RES.	1W 680R J
R906	VE-30000499	SMD RES.	1/10W 1.2K J
R907	VE-30017132	MF RES.	51K 1W F
R908	VE-30000499	SMD RES.	1/10W 1.2K J
R909	VE-30000524	SMD RES.	1/10W 150R J
R910	VE-30001192	MO RES.	1W 680R J
R911	VE-30000499	SMD RES.	1/10W 1.2K J
R912	VE-30017132	MF RES.	51K 1W F
R913	VE-30000499	SMD RES.	1/10W 1.2K J
R914	VE-30000524	SMD RES.	1/10W 150R J
R915	VE-30001192	MO RES.	1W 680R J
R916	VE-30001125	MO RES.	2W 2.2K J
R917	VE-30001170	MO RES.	1W 4.7K J
R918	VE-30000788	CF RES.	1/4W 6.8M J
R920	VE-30000535	CF RES.	1/2W 150K J
R922	VE-30000477	CF RES.	1/4W 100K J
R923	VE-30000477	CF RES.	1/4W 100K J
R924	VE-30000477	CF RES.	1/4W 100K J
R925	VE-30007788	SMD RES.	1/10W 2.7K F
R926	VE-30000469	SMD RES.	1/10W 1K J
R927	VE-30001247	FUSE RES.	1/2W 4.7R J
R929	VE-30000466	CF RES.	1/4W 1K J
R931	VE-30000593	SMD RES.	1/10W 2.2K J
R932	VE-30000471	CF RES.	1/4W 10K J
R944	VE-30001211	FUSE RES.	1W 1K J

CAPACITOR

C901	VE-3000275	C CAP.	8PF 50V D
------	------------	--------	-----------

[AV28BH7ENS / AV28BH7ENB]

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C902	VE-30000294	SMD CAP.	100NF 50V K	
C903	VE-30000075	MKT CAP.	100NF 250V K (DC)	
C904	VE-30000265	SMD CAP.	560PF 50V J	
C905	VE-30000209	SMD CAP.	18PF 50V J	
C906	VE-30000294	SMD CAP.	100NF 50V K	
C907	VE-30000075	MKT CAP.	100NF 250V K (DC)	
C908	VE-30000265	SMD CAP.	560PF 50V J	
C909	VE-30000220	SMD CAP.	22PF 50V J	
C910	VE-30000294	SMD CAP.	100NF 50V K	
C911	VE-30000075	MKT CAP.	100NF 250V K (DC)	
C912	VE-30000265	SMD CAP.	560PF 50V J	
C914	VE-30000072	MKT CAP.	10NF 1250V J	
C915	VE-30000415	EL CAP.	4.7UF 250V M	
C916	VE-30000330	C CAP.	4.7NF 50V K B	
C919	VE-30000352	EL CAP.	100UF 16V M	
C920	VE-30000294	SMD CAP.	100NF 50V K	
C921	VE-30000359	EL CAP.	10000UF 16V M	
C922	VE-30000075	MKT CAP.	100NF 250V K (DC)	
C923	VE-30000406	EL CAP.	471F 250V M (HR)	
C931	VE-30000265	SMD CAP.	560PF 50V J	
C934	VE-30000294	SMD CAP.	100NF 50V K	
C935	VE-30000294	SMD CAP.	100NF 50V K	
C936	VE-30000075	MKT CAP.	100NF 250V K (DC)	
C938	VE-30000433	C CAP.	1NF 1KV M B	
C949	VE-30000294	SMD CAP.	100NF 50V K	
COIL				
L904	VE-30001997	FIXED COIL	33UH Q60 J	
L905	VE-30001991	FIXED COIL	10UH RAD	
L921	VE-30001994	FIXED COIL	22UH J AXIAL	
DIODE				
D902	VE-30001318	DIODE		
D907	VE-30001284	DIODE		
TRANSISTOR				
Q901	VE-30001427	TR		
Q902	VE-30001455	TR		
IC				
IC901	VE-20000989	HE. ASSY		
IC902	VE-20000989	HE. ASSY		
IC903	VE-20000989	HE. ASSY		
OTHERS				
△ PL904	VE-30001855	CRT SOCKET		

**FRONT CONTROL P.W. BOARD ASS'Y
(VE-30017014)**

△	Symbol No.	Part No.	Part Name	Description
RESISTOR				
R1	VE-30000689	CF RES.	1/4W 3.9K J	
R2	VE-30000526	CF RES.	1/4W 1.5K J	
R3	VE-30000770	CF RES.	1/4W 680R J	
R4	VE-30000712	CF RES.	1/4W 470R J	
R5	VE-30000622	CF RES.	1/4W 270R J	
DIODE				
D1	VE-30001279	LED RED/GREEN		
IC				
IC1	VE-30001670	PREAMPLIFIER		
OTHERS				
SW1	VE-30002181	SWITCH TACT	V-	
SW2	VE-30002181	SWITCH TACT	MENU	
SW3	VE-30002181	SWITCH TACT	P+	
SW4	VE-30002181	SWITCH TACT	P-	
SW5	VE-30002181	SWITCH TACT	V+	

**FRONT AV + HEADPHONE JACK P.W. BOARD
ASS'Y (VE-30016761)**

△	Symbol No.	Part No.	Part Name	Description
RESISTOR				
R107	VE-30000594	CF RES.	1/4W 22K J	
R108	VE-30000712	CF RES.	1/4W 470R J	
R109	VE-30000594	CF RES.	1/4W 22K J	
R110	VE-30000712	CF RES.	1/4W 470R J	
R113	VE-30000744	CF RES.	1/4W 560R J	
R114	VE-30000744	CF RES.	1/4W 560R J	
R115	VE-30000712	CF RES.	1/4W 470R J	
R116	VE-30000712	CF RES.	1/4W 470R J	
CAPACITOR				
C103	VE-30000213	C CAP.	180PF 50V J CH	
C104	VE-30000213	C CAP.	180PF 50V J CH	
C106	VE-30000190	C CAP.	100PF 50V J CH	
COIL				
L103	VE-30001996	FIXED COIL		
L104	VE-30001996	FIXED COIL	22UH Q40 K	
OTHERS				
CON102	VE-30001893	RCA JACK		
CON103	VE-30001891	RCA JACK		
CON104	VE-30001892	RCA JACK		
CON106	VE-30001900	HEADPHONE JACK		
T103	VE-30001962	FERRITE		
T104	VE-30001963	FERRITE		
T107	VE-30001963	FERRITE		

PRINTED WIRING BOARD PARTS LIST**[AV28BHT7EPS / AV27BH7EPB]****MAIN P.W. BOARD ASS'Y (VE-20084599)**

Symbol No.	Part No.	Part Name	Description	Symbol No.	Part No.	Part Name	Description
RESISTOR							
R101	VE-30000668	SMD RES.	1/10W 33K J	R242	VE-30000784	CF RES.	1/4W 680K J
R102	VE-30007782	MF RES.	1/4W 3.9M F	R245	VE-30000466	CF RES.	1/4W 1K J
R103	VE-30000855	MF RES.	1/4W 1M F	R246	VE-30000752	CF RES.	1/4W 56K J
R104	VE-30000668	SMD RES.	1/10W 33K J	R250	VE-30000477	CF RES.	1/4W 100K J
R105	VE-30000452	CF RES.	1/4W 10R J	R251	VE-30000477	CF RES.	1/4W 100K J
R106	VE-30000664	SMD RES.	1/10W 3.3K J	R252	VE-30007789	SMD RES.	1/10W 27K F
R107	VE-30007019	SMD RES.	1/10W 10K F	R254	VE-30000636	SMD RES.	1/10W 27K J
R108	VE-30007784	MO RES.	5W 33K J	R255	VE-30001134	MO RES.	2W 2.2R J
R109	VE-30001270	PTC	9 OHM	R256	VE-30001100	MO RES.	1W 150R J
R110	VE-30001171	MO RES.	2W 4.7K J	R257	VE-30001173	MO RES.	1W 0.47R J
R111	VE-30001257	MG RES.	1/2W 4.7M J	R260	VE-30000778	SMD RES.	1/10W 6.8K J
R112	VE-30009036	FUSE RES.	1/2W 0.1R J	R261	VE-30000778	SMD RES.	1/10W 6.8K J
R113	VE-30009036	FUSE RES.	1/2W 0.1R J	R262	VE-30001237	FUSE RES.	1/2W 3.3R J
R120	VE-30000814	SMD RES.	1/10W 820R J	R264	VE-30001077	MO RES.	2W 10R J
R122	VE-30000469	SMD RES.	1/10W 1K J	R270	VE-30000541	CF RES.	1/4W 1.5M J
R123	VE-30000469	SMD RES.	1/10W 1K J	R271	VE-30000744	CF RES.	1/4W 560R J
R124	VE-30000480	SMD RES.	1/10W 100K J	R272	VE-30000475	SMD RES.	1/10W 10K J
R125	VE-30000927	MF RES.	1/4W 220K J	R280	VE-30000480	SMD RES.	1/10W 100K J
R126	VE-30000664	SMD RES.	1/10W 3.3K J	R281	VE-30000480	SMD RES.	1/10W 100K J
R127	VE-30000469	SMD RES.	1/10W 1K J	R318	VE-30000469	SMD RES.	1/10W 1K J
R128	VE-30000536	CF RES.	1/4W 150K J	R322	VE-30000594	CF RES.	1/4W 22K J
R129	VE-30007019	SMD RES.	1/10W 10K F	R323	VE-30000459	CF RES.	1/4W 100R J
R130	VE-30000721	SMD RES.	1/10W 4.7K J	R324	VE-30000464	SMD RES.	1/10W 100R J
R134	VE-30000469	SMD RES.	1/10W 1K J	R327	VE-30000464	SMD RES.	1/10W 100R J
R135	VE-30007790	SMD RES.	1/10W 4.3K F	R360	VE-30000659	SMD RES.	1/10W 330R J
R136	VE-30000774	SMD RES.	1/10W 680R J	R361	VE-30000659	SMD RES.	1/10W 330R J
R137	VE-30007021	SMD RES.	1/10W 1K F	R362	VE-30000659	SMD RES.	1/10W 330R J
R138	VE-30007786	SMD RES.	1/10W 2.55K F	R363	VE-30000659	SMD RES.	1/10W 330R J
R139	VE-30000774	SMD RES.	1/10W 680R J	R364	VE-30000659	SMD RES.	1/10W 330R J
R140	VE-30000459	CF RES.	1/4W 100R J	R365	VE-30000659	SMD RES.	1/10W 330R J
R141	VE-30000475	SMD RES.	1/10W 10K J	R366	VE-30000659	SMD RES.	1/10W 330R J
R142	VE-30000475	SMD RES.	1/10W 10K J	R367	VE-30000659	SMD RES.	1/10W 330R J
R143	VE-30007021	SMD RES.	1/10W 1K F	R368	VE-30000659	SMD RES.	1/10W 330R J
R144	VE-30007788	SMD RES.	1/10W 2.7K F	R369	VE-30000659	SMD RES.	1/10W 330R J
R145	VE-30000732	SMD RES.	1/10W 470K J	R370	VE-30000659	SMD RES.	1/10W 330R J
R146	VE-30000469	SMD RES.	1/10W 1K J	R371	VE-30000659	SMD RES.	1/10W 330R J
R148	VE-30014023	FUSE RES.	1/2W 0.1R J	R372	VE-30000659	SMD RES.	1/10W 330R J
R149	VE-30007204	MF RES.	1/2W 1.5M F	R373	VE-30000659	SMD RES.	1/10W 330R J
R150	VE-30007783	FUSE RES.	1/4W 2.2R J	R374	VE-30000659	SMD RES.	1/10W 330R J
R151	VE-30014023	FUSE RES.	1/2W 0.1R J	R375	VE-30000659	SMD RES.	1/10W 330R J
R152	VE-30000659	SMD RES.	1/10W 330R J	R376	VE-30000659	SMD RES.	1/10W 330R J
R153	VE-30012649	SMD RES.	1/10W 150R J	R378	VE-30000659	SMD RES.	1/10W 330R J
R154	VE-30012984	SMD RES.	1/10W 91R J	R379	VE-30000659	SMD RES.	1/10W 330R J
R155	VE-30000712	CF RES.	1/4W 470R J	R380	VE-30000659	SMD RES.	1/10W 330R J
R156	VE-30001089	MO RES.	2W 1R J	R381	VE-30000659	SMD RES.	1/10W 330R J
R157	VE-30000534	SMD RES.	1/10W 15K J	R382	VE-30000659	SMD RES.	1/10W 330R J
R158	VE-30000475	SMD RES.	1/10W 10K J	R383	VE-30000659	SMD RES.	1/10W 330R J
R159	VE-30000480	SMD RES.	1/10W 100K J	R384	VE-30000659	SMD RES.	1/10W 330R J
R160	VE-30006923	SMD RES.	1/10W 4.3K J	R385	VE-30000659	SMD RES.	1/10W 330R J
R202	VE-30007779	MO RES.	5W 47R J	R397	VE-30000659	SMD RES.	1/10W 330R J
R203	VE-30000534	SMD RES.	1/10W 15K J	R398	VE-30000659	SMD RES.	1/10W 330R J
R205	VE-30001004	MF RES.	1/2W 0.56R J	R401	VE-30000665	CF RES.	1/4W 33K J
R206	VE-30001079	MO RES.	1W 100R J	R403	VE-30000668	SMD RES.	1/10W 33K J
R210	VE-30000583	CF RES.	1/4W 220R J	R411	VE-30000747	SMD RES.	1/10W 560R J
R211	VE-30000721	SMD RES.	1/10W 4.7K J	R412	VE-30000721	SMD RES.	1/10W 4.7K J
R212	VE-30000593	SMD RES.	1/10W 2.2K J	R413	VE-30000475	SMD RES.	1/10W 10K J
R213	VE-30000593	SMD RES.	1/10W 2.2K J	R414	VE-30000469	SMD RES.	1/10W 1K J
R214	VE-30000593	SMD RES.	1/10W 2.2K J	R415	VE-30000517	SMD RES.	1/10W 15R J
R215	VE-30000721	SMD RES.	1/10W 4.7K J	R416	VE-30000717	SMD RES.	1/10W 470R J
R216	VE-30000631	SMD RES.	1/10W 2.7K J	R417	VE-30000778	SMD RES.	1/10W 6.8K J
R217	VE-30000593	SMD RES.	1/10W 2.2K J	R418	VE-30000593	SMD RES.	1/10W 2.2K J
R218	VE-30000480	SMD RES.	1/10W 100K J	R421	VE-30000563	SMD RES.	1/10W 1.8K J
R220	VE-30000590	CF RES.	1/4W 2.2K J	R422	VE-30000464	SMD RES.	1/10W 100R J
R225	VE-30001086	MO RES.	2W 10K J	R424	VE-30000721	SMD RES.	1/10W 1K F
R226	VE-30001168	MO RES.	2W 470R J	R425	VE-30000797	SMD RES.	1/10W 75R J
R227	VE-30000469	SMD RES.	1/10W 1K J	R428	VE-30000475	SMD RES.	1/10W 10K J
R228	VE-30000475	SMD RES.	1/10W 10K J	R429	VE-30000475	SMD RES.	1/10W 10K J
R229	VE-30000727	SMD RES.	1/10W 47K J	R432	VE-30000787	SMD RES.	1/10W 680K J
R230	VE-30000902	MF RES.	1/4W 1.8K F	R436	VE-30000735	SMD RES.	1/10W 4.7R J
R231	VE-30001229	FUSE RES.	1W 2.2R J	R437	VE-30000499	SMD RES.	1/10W 1.2K J
R232	VE-30000477	CF RES.	1/4W 100K J	R438	VE-30000655	CF RES.	1/4W 330R J
R233	VE-30001244	FUSE RES.	0.47R 1/2W J	R439	VE-30000563	SMD RES.	1/10W 1.8K J
R234	VE-30009036	FUSE RES.	1/2W 0.1R J	R440	VE-30000614	SMD RES.	1/10W 2.4K J
R235	VE-30000668	SMD RES.	1/10W 33K J	R441	VE-30000475	SMD RES.	1/10W 10K J
R236	VE-30000718	CF RES.	1/4W 4.7K J	R445	VE-30000814	SMD RES.	1/10W 820R J
R237	VE-30001244	FUSE RES.	0.47R 1/2W J	R446	VE-30000469	SMD RES.	1/10W 1K J
R238	VE-30000729	CF RES.	1/4W 470K J	R447	VE-30000469	SMD RES.	1/10W 1K J
R239	VE-30001089	MO RES.	2W 1R J	R475	VE-30000524	SMD RES.	1/10W 150R J
R240	VE-30000469	SMD RES.	1/10W 1K J	R480	VE-30000718	CF RES.	1/10W 4.7K J
R241	VE-30000818	SMD RES.	1/10W 8.2K J	R490	VE-30000466	CF RES.	1/4W 1K J

[AV28BHT7EPS / AV27BH7EPB]

▲ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R492	VE-30000503	SMD RES.	1/10W 12K J
R506	VE-30012695	SMD RES.	1/10W 470R J
R509	VE-30000797	SMD RES.	1/10W 75R J
R510	VE-30000721	SMD RES.	1/10W 1K F
R511	VE-30000464	SMD RES.	1/10W 100R J
R512	VE-30000464	SMD RES.	1/10W 100R J
R513	VE-30000457	SMD RES.	1/10W 10R J
R516	VE-30000664	SMD RES.	1/10W 3.3K J
R517	VE-30000664	SMD RES.	1/10W 3.3K J
R518	VE-30000735	SMD RES.	1/10W 4.7R J
R801	VE-30000718	CF RES.	1/4W 4.7K J
R802	VE-30000718	CF RES.	1/4W 4.7K J
R803	VE-30000628	CF RES.	1/4W 2.7K J
R804	VE-30000475	SMD RES.	1/10W 10K J
R805	VE-30000534	SMD RES.	1/10W 15K J
R806	VE-30000531	CF RES.	1/4W 15K J
R807	VE-30000567	SMD RES.	1/10W 18K J
R808	VE-30000734	CF RES.	1/4W 4.7R J
R809	VE-30000717	SMD RES.	1/10W 470R J
R810	VE-30000564	CF RES.	1/4W 18K J
R811	VE-30000717	SMD RES.	1/10W 470R J
R812	VE-30000734	CF RES.	1/4W 4.7R J
R813	VE-30000475	SMD RES.	1/10W 10K J
R819	VE-30000734	CF RES.	1/4W 4.7R J
R820	VE-30000734	CF RES.	1/4W 4.7R J
R900	VE-30012641	SMD RES.	1/10W 10K J
R901	VE-30012641	SMD RES.	1/10W 10K J
R902	VE-30012641	SMD RES.	1/10W 10K J
R903	VE-30000718	CF RES.	1/4W 4.7K J
R904	VE-30000718	CF RES.	1/4W 4.7K J
R905	VE-30000723	CF RES.	1/4W 47K J
R906	VE-30012696	SMD RES.	1/10W 47K J
R907	VE-30012679	SMD RES.	1/10W 3.9K J
R908	VE-30012679	SMD RES.	1/10W 3.9K J
R909	VE-30000531	CF RES.	1/4W 15K J
R910	VE-30000531	CF RES.	1/4W 15K J
R911	VE-30012641	SMD RES.	1/10W 10K J
R912	VE-30000471	CF RES.	1/4W 10K J
R913	VE-30012641	SMD RES.	1/10W 10K J
R914	VE-30000471	CF RES.	1/4W 10K J
R915	VE-30000471	CF RES.	1/4W 10K J
R916	VE-30012695	SMD RES.	1/10W 470R J
R917	VE-30012987	SMD RES.	1/10W 56R J
R918	VE-30012692	SMD RES.	1/10W 4.7J
R919	VE-30012657	SMD RES.	1/10W 1K J
R920	VE-30012657	SMD RES.	1/10W 1K J
R921	VE-30012657	SMD RES.	1/10W 1K J
R922	VE-30012657	SMD RES.	1/10W 1K J
R923	VE-30012657	SMD RES.	1/10W 1K J
R924	VE-30012696	SMD RES.	1/10W 47K J
R925	VE-30012696	SMD RES.	1/10W 47K J
R926	VE-30012696	SMD RES.	1/10W 47K J
R927	VE-30012696	SMD RES.	1/10W 47K J
R928	VE-30012510	SMD RES.	1/10W 100R J
R929	VE-30012510	SMD RES.	1/10W 100R J
R930	VE-30012641	SMD RES.	1/10W 10K J
R931	VE-30012641	SMD RES.	1/10W 10K J
R932	VE-30012641	SMD RES.	1/10W 10K J
R933	VE-30000718	CF RES.	1/4W 4.7K J
R934	VE-30012692	SMD RES.	1/10W 4.7K J
R935	VE-30012662	SMD RES.	1/10W 2.7K J
R936	VE-30000718	CF RES.	1/4W 4.7K J
R937	VE-30000459	CF RES.	1/4W 100R J
R938	VE-30012509	SMD RES.	1/10W 100K J
R939	VE-30012692	SMD RES.	1/10W 4.7K J
R940	VE-30000500	CF RES.	1/4W 12K J
R941	VE-30000588	SMD RES.	1/10W 220R J
R942	VE-30000588	SMD RES.	1/10W 220R J
R943	VE-30000471	CF RES.	1/4W 10K J
R944	VE-30012641	SMD RES.	1/10W 10K J
R945	VE-30000471	CF RES.	1/4W 10K J
R946	VE-30012657	SMD RES.	1/10W 1K J
R950	VE-30012657	SMD RES.	1/10W 100R J
R951	VE-30012657	SMD RES.	1/10W 1K J
R952	VE-30012657	SMD RES.	1/10W 1K J
R953	VE-30000466	CF RES.	1/4W 1K J
R955	VE-30012657	SMD RES.	1/10W 1K J
R956	VE-30012510	SMD RES.	1/10W 100R J
R957	VE-30012655	SMD RES.	1/10W 180R J
R958	VE-30014022	SMD RES.	1/10W 47R J
R959	VE-30000466	CF RES.	1/4W 1K J
R960	VE-30000471	CF RES.	1/4W 10K J
R961	VE-30000718	CF RES.	1/4W 4.7K J
R964	VE-30012641	SMD RES.	1/10W 10K J

▲ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R965	VE-30012657	SMD RES.	1/10W 1K J
R966	VE-30012641	SMD RES.	1/10W 10K J
CAPACITOR			
C100	VE-3000098	MKT CAP.	3.3NF 63V J
C101	VE-30000371	EL CAP.	22uF 50V M
C102	VE-30000294	SMD CAP.	10uNF 50V K
C103	VE-30000294	SMD CAP.	100NF 50V K
C104	VE-30012323	MKT CAP.	1NF 100V J
C105	VE-30000284	SMD CAP.	1NF 50V K R
C106	VE-30000332	SMD CAP.	4.7NF 50V K
C107	VE-30000263	SMD CAP.	56PF 50V J
C108	VE-30000123	PP CAP.	33NF 630V K
C109	VE-30000159	MKP CAP.	4.7NF 1.6KV J
C110	VE-300009208	C CAP.	470PF 1KV K
C111	VE-30000131	MKP CAP.	100NF 250V J
C112	VE-30000094	MKT CAP.	220NF AC275V M
C114	VE-30000353	EL CAP.	100uF 25V M
C115	VE-30007858	MKT CAP.	470NF AC275V M
C118	VE-30007755	MKT CAP.	680NF AC275V M
C119	VE-30007754	MKP CAP.	1uF 400V
C120	VE-30007753	MKP CAP.	1NF 1KV
C121	VE-30013690	EL CAP.	220uF 450V M
C122	VE-30000447	C CAP.	4.7NF 4KV M E
C124	VE-30000315	SMD CAP.	220NF 25V Z
C125	VE-30000315	SMD CAP.	220NF 25V Z
C130	VE-30007708	C CAP.	1NF 1KV K
C131	VE-30006909	EL CAP.	100uF M 250V
C132	VE-30007750	EL CAP.	470uF 25V M
C133	VE-30000409	EL CAP.	470uF 25V M
C134	VE-30007750	EL CAP.	470uF 35V
C135	VE-30007748	EL CAP.	1000uF 35V M
C136	VE-30007748	EL CAP.	1000uF 35V M
C137	VE-30000284	SMD CAP.	1NF 50V K R
C138	VE-30000224	SMD CAP.	220PF 50V J
C139	VE-30000284	SMD CAP.	1NF 50V K R
C140	VE-30000360	EL CAP.	1000uF 25V M
C141	VE-30000352	EL CAP.	100uF 16V M
C142	VE-30000294	SMD CAP.	100NF 50V K
C143	VE-30000294	SMD CAP.	100NF 50V K
C144	VE-30000352	EL CAP.	100uF 16V M
C145	VE-30000309	SMD CAP.	2.2NF 50V K R
C146	VE-30000359	EL CAP.	1000uF 16V M
C147	VE-30000359	EL CAP.	1000uF 16V M
C148	VE-30000294	SMD CAP.	100NF 50V K
C149	VE-30000294	SMD CAP.	100NF 50V K
C150	VE-30000352	EL CAP.	100uF 16V M
C151	VE-30000284	SMD CAP.	1NF 50V K R
C160	VE-30007081	EL CAP.	4.7uF 50V M
C161	VE-30007308	C CAP.	220PF 1KV K
C162	VE-30007308	C CAP.	220PF 1KV K
C163	VE-30009208	C CAP.	470PF 1KV K
C165	VE-30016654	SMD CAP.	100NF 16V K R
C166	VE-30000400	EL CAP.	47uF 50V M
C167	VE-30009208	C CAP.	470PF 1KV K
C168	VE-30000294	SMD CAP.	100NF 50V K
C170	VE-30000352	EL CAP.	100uF 16V M
C171	VE-30000352	EL CAP.	100uF 16V M
C172	VE-30016654	SMD CAP.	100NF 16V K R
C173	VE-30000315	SMD CAP.	220NF 25V Z
C201	VE-30000360	EL CAP.	1000uF 25V M
C202	VE-30000106	MKT CAP.	47NF 100V J
C203	VE-30000099	MKT CAP.	33NF 63V J
C204	VE-30000345	EL CAP.	10uF 50V M
C206	VE-30000315	SMD CAP.	220NF 25V Z
C207	VE-30000362	EL CAP.	1uF 50V M
C208	VE-30000415	EL CAP.	4.7uF 250V M
C209	VE-30000224	SMD CAP.	220PF 50V J
C210	VE-30000149	MKP CAP.	2.7NF 2KV 3.5%
C211	VE-30000179	MKP CAP.	9.1NF 1600V 3.5%
C212	VE-30000137	MKP CAP.	15NF 630V J
C213	VE-30007215	MKP CAP.	1.2uF 250V J
C214	VE-30000415	EL CAP.	4.7uF 250V M
C215	VE-30000166	MKP CAP.	560NF 250V J
C216	VE-30000415	EL CAP.	4.7uF 250V M
C222	VE-30000431	C CAP.	100PF 1KV M
C223	VE-30000351	EL CAP.	10uF 350V M
C225	VE-30000359	EL CAP.	1000uF 16V M
C226	VE-30000356	EL CAP.	100uF 63V M
C228	VE-30000360	EL CAP.	1000uF 25V M
C232	VE-30000225	C CAP.	220PF 50V J S
C240	VE-30000400	EL CAP.	47uF 50V M

[AV28BHT7EPS / AV27BH7EPB]

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C250	VE-30000304	SMD CAP.	1.8NF 50V K R	
C251	VE-30000359	EL CAP.	1000UF 16V M	
C252	VE-30000289	SMD CAP.	10NF 50V K R	
C253	VE-30000294	SMD CAP.	100NF 50V K	
C254	VE-30000360	EL CAP.	1000UF 25V M	
C255	VE-30000294	SMD CAP.	100NF 50V K	
C256	VE-30000092	MKT CAP.	220NF 63V J	
C257	VE-30000304	SMD CAP.	1.8NF 50V K R	
C258	VE-30000322	SMD CAP.	3.3NF 50V K	
C305	VE-30000294	SMD CAP.	100NF 50V K	
C313	VE-30000189	SMD CAP.	100PF 50V J	
C321	VE-30000352	EL CAP.	100UF 16V M	
C322	VE-30000352	EL CAP.	100UF 16V M	
C324	VE-30000294	SMD CAP.	100NF 50V K	
C333	VE-30000294	SMD CAP.	100NF 50V K	
C402	VE-30000345	EL CAP.	10UF 50V M	
C403	VE-30000384	EL CAP.	2.2UF 50V M	
C404	VE-30000284	SMD CAP.	1NF 50V K R	
C405	VE-30000284	SMD CAP.	1NF 50V K R	
C406	VE-30000224	SMD CAP.	220PF 50V J	
C407	VE-30000312	SMD CAP.	22NF 50V K	
C408	VE-30000371	EL CAP.	22UF 50V M	
C409	VE-30000294	SMD CAP.	100NF 50V K	
C410	VE-30000294	SMD CAP.	100NF 50V K	
C411	VE-30000109	MKT CAP.	470NF 63V J	
C412	VE-30000384	EL CAP.	2.2UF 50V M	
C413	VE-30000294	SMD CAP.	100NF 50V K	
C414	VE-30000294	SMD CAP.	100NF 50V K	
C417	VE-30000294	SMD CAP.	100NF 50V K	
C418	VE-30000294	SMD CAP.	100NF 50V K	
C419	VE-30000294	SMD CAP.	100NF 50V K	
C424	VE-30000387	EL CAP.	33UF 50V M	
C427	VE-30000294	SMD CAP.	100NF 50V K	
C428	VE-30000294	SMD CAP.	100NF 50V K	
C430	VE-30000294	SMD CAP.	100NF 50V K	
C440	VE-30000400	EL CAP.	47UF 50V M	
C441	VE-30000220	SMD CAP.	22PF 50V J	
C442	VE-30000294	SMD CAP.	100NF 50V K	
C443	VE-30013411	SMD CAP.	180PF 50V J	
C450	VE-30000345	EL CAP.	10UF 50V M	
C451	VE-30000294	SMD CAP.	100NF 50V K	
C453	VE-30000355	EL CAP.	100UF 50V M	
C454	VE-30000294	SMD CAP.	100NF 50V K	
C456	VE-30000352	EL CAP.	100UF 16V M	
C457	VE-30000294	SMD CAP.	100NF 50V K	
C468	VE-30000294	SMD CAP.	100NF 50V K	
C478	VE-30000294	SMD CAP.	100NF 50V K	
C479	VE-30000362	EL CAP.	1UF 50V M	
C492	VE-30000294	SMD CAP.	100NF 50V K	
C493	VE-30000384	EL CAP.	2.2UF 50V M	
C494	VE-30000345	EL CAP.	10UF 50V M	
C496	VE-30000413	EL CAP.	4.7UF 50V M	
C497	VE-30000294	SMD CAP.	100NF 50V K	
C498	VE-30000294	SMD CAP.	100NF 50V K	
C499	VE-30000362	EL CAP.	1UF 50V M	
C500	VE-30000352	EL CAP.	100UF 16V M	
C505	VE-30000294	SMD CAP.	100NF 50V K	
C506	VE-30000345	EL CAP.	10UF 50V M	
C509	VE-30000186	SMD CAP.	10PF 50V D	
C510	VE-30000186	SMD CAP.	10PF 50V D	
C511	VE-30000341	SMD CAP.	68NF 50V K	
C610	VE-30000074	MKT CAP.	100NF 63V J	
C801	VE-30000362	EL CAP.	1UF 50V M	
C802	VE-30000362	EL CAP.	1UF 50V M	
C803	VE-30000362	EL CAP.	1UF 50V M	
C804	VE-30000409	EL CAP.	470UF 25V M	
C805	VE-30000294	SMD CAP.	100NF 50V K	
C806	VE-30000409	EL CAP.	470UF 25V M	
C807	VE-30000294	SMD CAP.	100NF 50V K	
C808	VE-30000074	MKT CAP.	100NF 63V J	
C809	VE-30000074	MKT CAP.	100NF 63V J	
C819	VE-30000309	SMD CAP.	2.2NF 50V K R	
C820	VE-30000309	SMD CAP.	2.2NF 50V K R	
C821	VE-30000309	SMD CAP.	2.2NF 50V K R	
C822	VE-30000309	SMD CAP.	2.2NF 50V K R	
C900	VE-30000371	EL CAP.	22UF 50V M	
C901	VE-30016654	SMD CAP.	100NF 16V K R	
C902	VE-30016654	SMD CAP.	100NF 16V K R	
C903	VE-30016654	SMD CAP.	100NF 16V K R	
C904	VE-30000074	MKT CAP.	100NF 63V J	
C905	VE-30000371	EL CAP.	22UF 50V M	
C906	VE-30016654	SMD CAP.	100NF 16V K R	
C907	VE-30000074	MKT CAP.	100NF 63V J	
C908	VE-30016654	SMD CAP.	100NF 16V K R	

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C909	VE-30016654	SMD CAP.	100NF 16V K R	
C910	VE-30016654	SMD CAP.	100NF 16V K R	
C911	VE-30000352	EL CAP.	100UF 16V M	
C912	VE-30012569	SMD CAP.	33PF 50V J	
C913	VE-30012569	SMD CAP.	33PF 50V J	
C914	VE-30000371	EL CAP.	22UF 50V M	
C915	VE-30016654	SMD CAP.	100NF 16V K R	
C916	VE-30016654	SMD CAP.	100NF 16V K R	
C917	VE-30016654	SMD CAP.	100NF 16V K R	
C918	VE-30016654	SMD CAP.	100NF 16V K R	
C919	VE-30000375	EL CAP.	220UF 16V M	
C920	VE-30000384	EL CAP.	2.2UF 50V M	
C921	VE-30016654	SMD CAP.	100NF 16V K R	
C926	VE-30016654	SMD CAP.	100NF 16V K R	
C927	VE-30016654	SMD CAP.	100NF 16V K R	
C930	VE-30000345	EL CAP.	10UF 50V M	
C931	VE-30000257	C CAP.	470PF 50V J SL	
C932	VE-30016654	SMD CAP.	100NF 16V K R	
C933	VE-30000294	SMD CAP.	100NF 50V K	
TRANS F				
▲ TR101	VE-30016819	SMPS TRF		
TR201	VE-30006743	TRF. HORIZONTAL DRIVER		
▲ TR202	VE-30016922	FBT TRF		
COIL				
L101	VE-30006712	FERRITE BEAD		
L102	VE-30007775	PFC COIL	1MH 1KHZ 2A	
▲ L103	VE-30006744	LINE FILTER	16MH	
▲ L104	VE-30006744	LINE FILTER	16MH	
L106	VE-30006712	FERRITE BEAD		
L107	VE-30001960	FERIT BAR		
L108	VE-30001960	FERIT BAR		
L109	VE-30001960	FERIT BAR		
L201	VE-30007771	FIXED COIL		
L202	VE-30007757	COIL INJECTION EW	100UH 6MH	
L203	VE-30007770	FILTER COIL	1MH	
L204	VE-30012271	LINEARTY COIL	4.3UH	
L205	VE-30007756	BRIDGE COIL	150UH 32KHZ	
L206	VE-30006712	FERRITE BEAD		
L207	VE-30006712	FERRITE BEAD		
L304	VE-30001992	FIXED COIL	10UH Q65 K-A	
L401	VE-30001986	FIXED COIL	3.3UH Q65 K	
L403	VE-30001979	FIXED COIL	1UH Q45 M-A	
L405	VE-30001987	FIXED COIL	4.7UH Q70 K-A	
L420	VE-30001996	FIXED COIL	22UH Q40 K	
L421	VE-30001992	FIXED COIL	10UH Q65 K-A	
L422	VE-30001994	FIXED COIL	22UH J AXIAL	
L423	VE-30001994	FIXED COIL	22UH J AXIAL	
L425	VE-30001971	FERRITE BEAD		
L801	VE-30002170	COIL FTZ/RAD		
L802	VE-30002170	COIL FTZ/RAD		
L900	VE-30001992	FIXED COIL	10UH Q65 K-A	
L901	VE-30001992	FIXED COIL	10UH Q65 K-A	
L902	VE-30001992	FIXED COIL	10UH Q65 K-A	
L903	VE-30001992	FIXED COIL	10UH Q65 K-A	
L904	VE-30001987	FIXED COIL	4.7UH Q70 K-A	
L905	VE-30001984	FIXED COIL	2.2UH Q55 M-AK	
L906	VE-30002171	CHOKE PEAKING COIL	22UH K	
DIODE				
D101	VE-30001285	DIODE		
D102	VE-30001291	DIODE		
D103	VE-30007768	DIODE		
D104	VE-30007768	DIODE		
D105	VE-30007768	DIODE		
D106	VE-30007758	BRIDGE DIODE		
D108	VE-30001318	DIODE		
D109	VE-30009699	ZENER DIODE		
D110	VE-20063054	DIODE		
D111	VE-30001299	DIODE		
D112	VE-30001302	DIODE		
D113	VE-30001302	DIODE		
D114	VE-30001302	DIODE		
D115	VE-30001285	DIODE		
D116	VE-30007760	ZENER DIODE		
D117	VE-30001285	DIODE		
D118	VE-30007760	ZENER DIODE		

[AV28BHT7EPS / AV27BH7EPB]

▲ Symbol No.	Part No.	Part Name	Description
DIODE			
D119	VE-30001284	DIODE	
D120	VE-30001291	DIODE	
D121	VE-30001318	DIODE	
D122	VE-30001318	DIODE	
D123	VE-30001285	DIODE	
D126	VE-30001284	DIODE	
D127	VE-30001284	DIODE	
D128	VE-30001284	DIODE	
D201	VE-30001291	DIODE	
D202	VE-30001285	DIODE	
D203	VE-30007760	ZENER DIODE	
D205	VE-30007763	ZENER DIODE	
D206	VE-30007678	DIODE GUC	
D207	VE-30007768	DIODE	
D208	VE-30001291	DIODE	
D209	VE-30001291	DIODE	
D210	VE-30001299	DIODE	
D211	VE-30001299	DIODE	
D212	VE-30001291	DIODE	
D213	VE-30001291	DIODE	
D214	VE-30007763	ZENER DIODE	
D215	VE-30007762	ZENER DIODE	
D216	VE-30001285	DIODE	
D218	VE-30001291	DIODE	
D219	VE-30001291	DIODE	
D220	VE-30001284	DIODE	
D221	VE-30001284	DIODE	
D222	VE-30001284	DIODE	
D223	VE-30001285	DIODE	
D224	VE-30001285	DIODE	
D225	VE-30001318	DIODE	
D401	VE-30001285	DIODE	
D402	VE-30001285	DIODE	
D403	VE-30001285	DIODE	
D900	VE-30012412	ZENER DIODE	
D901	VE-30007761	ZENER DIODE	

▲ Symbol No.	Part No.	Part Name	Description
TRANSISTOR			
Q101	VE-30007801	TR	
Q103	VE-30007802	TR	
Q104	VE-30007798	TR	
Q105	VE-30007798	TR	
Q106	VE-30007802	TR	
Q107	VE-30007798	TR	
Q108	VE-30007798	TR	
Q109	VE-30001457	TR	
Q110	VE-30001457	TR	
Q112	VE-30001454	TR	
Q113	VE-30001428	TR	
Q201	VE-30007802	TR	
Q202	VE-30016686	TR	
Q203	VE-30001458	TR	
Q204	VE-30001458	TR	
Q205	VE-30007799	TR	
Q206	VE-30001457	TR	
Q207	VE-30001457	TR	
Q208	VE-30001455	TR	
Q401	VE-30001457	TR	
Q403	VE-30001457	TR	
Q405	VE-30001457	TR	
Q406	VE-30001457	TR	
Q408	VE-30007800	TR	
Q415	VE-30001457	TR	
Q801	VE-30001457	TR	
Q802	VE-30001457	TR	
Q900	VE-30001458	TR	
Q901	VE-30001457	TR	
Q902	VE-30001457	TR	
Q903	VE-30001457	TR	
Q904	VE-30001457	TR	
Q905	VE-30001457	TR	
Q906	VE-30001457	TR	
Q907	VE-30001457	TR	
Q908	VE-30001457	TR	
Q909	VE-30001458	TR	
Q910	VE-30001457	TR	
Q911	VE-30001457	TR	

▲ Symbol No.	Part No.	Part Name	Description
IC101	VE-30007442	IC	
IC102	VE-30015087	IC	

▲ Symbol No.	Part No.	Part Name	Description
IC			
IC103	VE-30001506	IC	
IC104	VE-30007444	IC	
IC105	VE-30001500	IC	
IC106	VE-30001668	IC	
IC201	VE-30007793	IC	
IC202	VE-30001506	IC	
IC302	VE-30015382	IC(MEMORY)	
IC304	VE-30016491	IC	
IC401	VE-30001494	IC	
IC801	VE-30007794	IC	
IC802	VE-30007794	IC	
IC900	VE-30013571	IC(NYCOM)	
OTHERS			
F101	VE-20000849	FUSE ASSY	3.15A
F102	VE-30009037	FUSE	6.3A
F103	VE-30009037	FUSE	6.3A
RL2	VE-30002183	RELAY	
S133	VE-30000575	SMD RES.	1/10W 2K J
T401	VE-30001724	SER FILTER	
T402	VE-30001726	SER FILTER	
TU401	VE-30009637	TUNER	
VL401	VE-30002036	ADJ COIL VIF	
VR127	VE-30001041	ADJ RES.	0.15W 1K M VER
VR401	VE-30001069	ADJ RES.	0.15W 47K VER (MAN)
X900	VE-30006662	XTAL	6MHz
Z401	VE-30001706	SAW FILTER	
Z403	VE-30001692	SAW FILTER	

**MULTISOUND P.W. BOARD ASS'Y
(VE-30017302)**

Refer to PARTS LIST in page 27 for this P.W. board.

FEATURE BOX P.W. BOARD ASS'Y (VE-30013755)

Refer to PARTS LIST in page 29 for this P.W. board.

CRT SOCKET P.W. BOARD ASS'Y (VE-30017303)

Refer to PARTS LIST in page 30 for this P.W. board.

**FRONT CONTROL P.W. BOARD ASS'Y
(VE-30017014)**

Refer to PARTS LIST in page 31 for this P.W. board.

**FRONT AV + HEADPHONE JACK P.W. BOARD
ASS'Y (VE-30016761)**

Refer to PARTS LIST in page 31 for this P.W. board.

PRINTED WIRING BOARD PARTS LIST**[AV28BH7EES / AV28BH7EEB]****MAIN P.W. BOARD ASS'Y (VE-20084594)**

Symbol No.	Part No.	Part Name	Description	Symbol No.	Part No.	Part Name	Description
RESISTOR							
R101	VE-30000668	SMD RES.	1/10W 33K J	R242	VE-30000784	CF RES.	1/4W 680K J
R102	VE-30007782	MF RES.	1/4W 3.9M F	R245	VE-30000466	CF RES.	1/4W 1K J
R103	VE-30000855	MF RES.	1/4W 1M F	R246	VE-30000752	CF RES.	1/4W 56K J
R104	VE-30000668	SMD RES.	1/10W 33K J	R250	VE-30000477	CF RES.	1/4W 100K J
R105	VE-30000452	CF RES.	1/4W 10R J	R251	VE-30000477	CF RES.	1/4W 100K J
R106	VE-30000664	SMD RES.	1/10W 3.3K J	R252	VE-30007789	SMD RES.	1/10W 27K F
R107	VE-30007019	SMD RES.	1/10W 10K F	R254	VE-30000636	SMD RES.	1/10W 27K J
R108	VE-30007784	MO RES.	5W 33K J	R255	VE-30001134	MO RES.	2W 2.2R J
R109	VE-30001270	PTC	9 OHM	R256	VE-30001100	MO RES.	1W 150R J
R110	VE-30001171	MO RES.	2W 4.7K J	R257	VE-30001173	MO RES.	1W 0.47R J
R111	VE-30001257	MG RES.	1/2W 4.7M J	R260	VE-30000778	SMD RES.	1/10W 6.8K J
R112	VE-30009036	FUSE RES.	1/2W 0.1R J	R261	VE-30000778	SMD RES.	1/10W 6.8K J
R113	VE-30009036	FUSE RES.	1/2W 0.1R J	R262	VE-30001237	FUSE RES.	1/2W 3.3R J
R120	VE-30000814	SMD RES.	1/10W 820R J	R264	VE-30001077	MO RES.	2W 10R J
R122	VE-30000469	SMD RES.	1/10W 1K J	R270	VE-30000541	CF RES.	1/4W 1.5M J
R123	VE-30000469	SMD RES.	1/10W 1K J	R271	VE-30000744	CF RES.	1/4W 560R J
R124	VE-30000480	SMD RES.	1/10W 100K J	R272	VE-30000475	SMD RES.	1/10W 10K J
R125	VE-30000927	MF RES.	1/4W 220K J	R280	VE-30000480	SMD RES.	1/10W 100K J
R126	VE-30000664	SMD RES.	1/10W 3.3K J	R281	VE-30000480	SMD RES.	1/10W 100K J
R127	VE-30000469	SMD RES.	1/10W 1K J	R318	VE-30000469	SMD RES.	1/10W 1K J
R128	VE-30000536	CF RES.	1/4W 150K J	R322	VE-30000594	CF RES.	1/4W 22K J
R129	VE-30007019	SMD RES.	1/10W 10K F	R323	VE-30000459	CF RES.	1/4W 100R J
R130	VE-30000721	SMD RES.	1/10W 4.7K J	R324	VE-30000464	SMD RES.	1/10W 100R J
R134	VE-30000469	SMD RES.	1/10W 1K J	R327	VE-30000464	SMD RES.	1/10W 100R J
R135	VE-30007790	SMD RES.	1/10W 4.3K F	R360	VE-30000659	SMD RES.	1/10W 330R J
R136	VE-30000774	SMD RES.	1/10W 680R J	R361	VE-30000659	SMD RES.	1/10W 330R J
R137	VE-30007021	SMD RES.	1/10W 1K F	R362	VE-30000659	SMD RES.	1/10W 330R J
R138	VE-30007786	SMD RES.	1/10W 2.55K F	R363	VE-30000659	SMD RES.	1/10W 330R J
R139	VE-30000774	SMD RES.	1/10W 680R J	R364	VE-30000659	SMD RES.	1/10W 330R J
R140	VE-30000459	CF RES.	1/4W 100R J	R365	VE-30000659	SMD RES.	1/10W 330R J
R141	VE-30000475	SMD RES.	1/10W 10K J	R366	VE-30000659	SMD RES.	1/10W 330R J
R142	VE-30000475	SMD RES.	1/10W 10K J	R367	VE-30000659	SMD RES.	1/10W 330R J
R143	VE-30007021	SMD RES.	1/10W 1K F	R368	VE-30000659	SMD RES.	1/10W 330R J
R144	VE-30007788	SMD RES.	1/10W 2.7K F	R369	VE-30000659	SMD RES.	1/10W 330R J
R145	VE-30000732	SMD RES.	1/10W 470K J	R370	VE-30000659	SMD RES.	1/10W 330R J
R146	VE-30000469	SMD RES.	1/10W 10K J	R371	VE-30000659	SMD RES.	1/10W 330R J
R148	VE-30014023	FUSE RES.	1/2W 0.1R J	R372	VE-30000659	SMD RES.	1/10W 330R J
R149	VE-30007204	MF RES.	1/2W 1.5M F	R373	VE-30000659	SMD RES.	1/10W 330R J
R150	VE-30007783	FUSE RES.	1/4W 2.2R J	R374	VE-30000659	SMD RES.	1/10W 330R J
R151	VE-30014023	FUSE RES.	1/2W 0.1R J	R375	VE-30000659	SMD RES.	1/10W 330R J
R152	VE-30000659	SMD RES.	1/10W 330R J	R376	VE-30000659	SMD RES.	1/10W 330R J
R153	VE-30012649	SMD RES.	1/10W 150R J	R378	VE-30000659	SMD RES.	1/10W 330R J
R154	VE-30012984	SMD RES.	1/10W 91R J	R379	VE-30000659	SMD RES.	1/10W 330R J
R155	VE-30000712	CF RES.	1/4W 470R J	R380	VE-30000659	SMD RES.	1/10W 330R J
R156	VE-30001089	MO RES.	2W 1R J	R381	VE-30000659	SMD RES.	1/10W 330R J
R157	VE-30000534	SMD RES.	1/10W 15K J	R382	VE-30000659	SMD RES.	1/10W 330R J
R158	VE-30000475	SMD RES.	1/10W 10K J	R383	VE-30000659	SMD RES.	1/10W 330R J
R159	VE-30000480	SMD RES.	1/10W 100K J	R384	VE-30000659	SMD RES.	1/10W 330R J
R160	VE-30006923	SMD RES.	1/10W 4.3K J	R385	VE-30000659	SMD RES.	1/10W 330R J
R202	VE-30007779	MO RES.	5W 47R J	R397	VE-30000659	SMD RES.	1/10W 330R J
R203	VE-30000534	SMD RES.	1/10W 15K J	R398	VE-30000659	SMD RES.	1/10W 330R J
R205	VE-30001004	MF RES.	1/2W 0.56R J	R411	VE-30000747	SMD RES.	1/10W 560R J
R206	VE-30001079	MO RES.	1W 100R J	R412	VE-30000721	SMD RES.	1/10W 4.7K J
R210	VE-30000583	CF RES.	1/4W 220R J	R413	VE-30000475	SMD RES.	1/10W 10K J
R211	VE-30000721	SMD RES.	1/10W 4.7K J	R414	VE-30000469	SMD RES.	1/10W 1K J
R212	VE-30000593	SMD RES.	1/10W 2.2K J	R415	VE-30000517	SMD RES.	1/10W 15R J
R213	VE-30000593	SMD RES.	1/10W 2.2K J	R416	VE-30000717	SMD RES.	1/10W 470R J
R214	VE-30000593	SMD RES.	1/10W 2.2K J	R421	VE-30000563	SMD RES.	1/10W 1.8K J
R215	VE-30000721	SMD RES.	1/10W 4.7K J	R422	VE-30000464	SMD RES.	1/10W 100R J
R216	VE-30000631	SMD RES.	1/10W 2.7K J	R424	VE-30000721	SMD RES.	1/10W 1K F
R217	VE-30000593	SMD RES.	1/10W 2.2K J	R425	VE-30000797	SMD RES.	1/10W 75R J
R218	VE-30000480	SMD RES.	1/10W 100K J	R428	VE-30000475	SMD RES.	1/10W 10K J
R220	VE-30000590	CF RES.	1/4W 2.2K J	R429	VE-30000475	SMD RES.	1/10W 10K J
R225	VE-30001086	MO RES.	2W 10K J	R436	VE-30000735	SMD RES.	1/10W 4.7R J
R226	VE-30001168	MO RES.	2W 470R J	R440	VE-30000614	SMD RES.	1/10W 2.4K J
R227	VE-30000469	SMD RES.	1/10W 1K J	R441	VE-30000475	SMD RES.	1/10W 10K J
R228	VE-30000475	SMD RES.	1/10W 10K J	R445	VE-30000814	SMD RES.	1/10W 820R J
R229	VE-30000727	SMD RES.	1/10W 47K J	R475	VE-30000524	SMD RES.	1/10W 150R J
R230	VE-30000902	MF RES.	1/4W 1.8K F	R480	VE-30000718	CF RES.	1/4W 4.7K J
R231	VE-30001229	FUSE RES.	1W 2.2R J	R490	VE-30000466	CF RES.	1/4W 1K J
R232	VE-30000477	CF RES.	1/4W 100K J	R492	VE-30000503	SMD RES.	1/10W 12K J
R233	VE-30001244	FUSE RES.	0.47R 1/2W J	R506	VE-30012695	SMD RES.	1/10W 470R J
R234	VE-30009036	FUSE RES.	1/2W 0.1R J	R509	VE-30000797	SMD RES.	1/10W 75R J
R235	VE-30000668	SMD RES.	1/10W 33K J	R510	VE-30000721	SMD RES.	1/10W 1K F
R236	VE-30000718	CF RES.	1/4W 4.7K J	R511	VE-30000464	SMD RES.	1/10W 100R J
R237	VE-30001244	FUSE RES.	0.47R 1/2W J	R512	VE-30000464	SMD RES.	1/10W 100R J
R238	VE-30000729	CF RES.	1/4W 470K J	R513	VE-30000457	SMD RES.	1/10W 10R J
R239	VE-30001089	MO RES.	2W 1R J	R518	VE-30000735	SMD RES.	1/10W 4.7R J
R240	VE-30000469	SMD RES.	1/10W 1K J	R801	VE-30000718	CF RES.	1/4W 4.7K J
R241	VE-30000818	SMD RES.	1/10W 8.2K J	R802	VE-30000718	CF RES.	1/4W 4.7K J

[AV28BH7EES / AV28BH7EEB]

△	Symbol No.	Part No.	Part Name	Description	△	Symbol No.	Part No.	Part Name	Description
RESISTOR									
R803	VE-30000628	CF RES.	1/4W 2.7K J		C106	VE-30000332	SMD CAP.	4.7NF 50V K	
R804	VE-30000475	SMD RES.	1/10W 10K J		C107	VE-30000263	SMD CAP.	56PF 50V J CH	
R805	VE-30000534	SMD RES.	1/10W 15K J		C108	VE-30000123	PP CAP.	33NF 630V K	
R806	VE-30000531	CF RES.	1/4W 15K J		C109	VE-30000159	MKP CAP.	4.7NF 1.6KV J	
R807	VE-30000567	SMD RES.	1/10W 18K J		C110	VE-30009208	C CAP.	470PF 1KV K	
R808	VE-30000734	CF RES.	1/4W 4.7K J		C111	VE-30000131	MKP CAP.	100NF 250V J	
R809	VE-30000717	SMD RES.	1/10W 470R J		△ C112	VE-30000094	MKT CAP.	220nF AC275V M	
R810	VE-30000564	CF RES.	1/4W 18K J		C114	VE-30000353	EL CAP.	100UF 25V M	
R811	VE-30000717	SMD RES.	1/10W 470R J		△ C115	VE-30007858	MKT CAP.	470nF AC275V M	
R812	VE-30000734	CF RES.	1/4W 4.7R J		△ C118	VE-30007755	MKT CAP.	680nF AC275V M	
R813	VE-30000475	SMD RES.	1/10W 10K J		C119	VE-30007754	MKP CAP.	1UF 400V	
R819	VE-30000734	CF RES.	1/4W 4.7R J		C120	VE-30007753	MKP CAP.	1nF 1KV	
R820	VE-30000734	CF RES.	1/4W 4.7R J		C121	VE-30013690	EL CAP.	220UF 450V M	
R900	VE-30012641	SMD RES.	1/10W 10K J		△ C122	VE-30000447	C CAP.	4.7nF 4KV M E	
R901	VE-30012641	SMD RES.	1/10W 10K J		C124	VE-30000315	SMD CAP.	220nF 25V Z	
R902	VE-30012641	SMD RES.	1/10W 10K J		C125	VE-30000315	SMD CAP.	220nF 25V Z	
R903	VE-30000718	CF RES.	1/4W 4.7K J		C130	VE-30007708	C CAP.	1nF 1KV	
R904	VE-30000718	CF RES.	1/4W 4.7K J		C131	VE-30006909	EL CAP.	100UF M 250V	
R905	VE-30000723	CF RES.	1/4W 47K J		C132	VE-30007750	EL CAP.	470UF 35V	
R906	VE-30012696	SMD RES.	1/10W 47K J		C133	VE-30000409	EL CAP.	470nF 25V M	
R907	VE-30012679	SMD RES.	1/10W 3.9K J		C134	VE-30007750	EL CAP.	470UF 35V	
R908	VE-30012679	SMD RES.	1/10W 3.9K J		C135	VE-30007748	EL CAP.	1000UF 35V M	
R909	VE-30000531	CF RES.	1/4W 15K J		C136	VE-30007748	EL CAP.	1000UF 35V M	
R910	VE-30000531	CF RES.	1/4W 15K J		C137	VE-30000284	SMD CAP.	1nF 50V K R	
R911	VE-30012641	SMD RES.	1/10W 10K J		C138	VE-30000224	SMD CAP.	220PF 50V J	
R912	VE-30000471	CF RES.	1/4W 10K J		C139	VE-30000284	SMD CAP.	1nF 50V K R	
R913	VE-30012641	SMD RES.	1/10W 10K J		C140	VE-30000360	EL CAP.	1000UF 25V M	
R914	VE-30000471	CF RES.	1/4W 10K J		C141	VE-30000352	EL CAP.	100UF 16V M	
R915	VE-30000471	CF RES.	1/4W 10K J		C142	VE-30000294	SMD CAP.	100nF 50V K	
R916	VE-30012695	SMD RES.	1/10W 470R J		C143	VE-30000294	SMD CAP.	100nF 50V K	
R917	VE-30012987	SMD RES.	1/10W 56R J		C144	VE-30000352	EL CAP.	100UF 16V M	
R918	VE-30012692	SMD RES.	1/10W 4.7K J		C145	VE-30000309	SMD CAP.	2.7nF 50V K R	
R919	VE-30012657	SMD RES.	1/10W 1K J		C146	VE-30000359	EL CAP.	1000UF 16V M	
R920	VE-30012657	SMD RES.	1/10W 1K J		C147	VE-30000359	EL CAP.	1000UF 16V M	
R921	VE-30012657	SMD RES.	1/10W 1K J		C148	VE-30000294	SMD CAP.	100nF 50V K	
R922	VE-30012657	SMD RES.	1/10W 1K J		C149	VE-30000294	SMD CAP.	100nF 50V K	
R923	VE-30012657	SMD RES.	1/10W 1K J		C150	VE-30000352	EL CAP.	100UF 16V M	
R924	VE-30012696	SMD RES.	1/10W 47K J		C151	VE-30000284	SMD CAP.	1nF 50V K R	
R925	VE-30012696	SMD RES.	1/10W 47K J		C160	VE-30007081	EL CAP.	4.7UF 50V M	
R926	VE-30012696	SMD RES.	1/10W 47K J		C161	VE-30007308	C CAP.	220PF 1KV K	
R927	VE-30012696	SMD RES.	1/10W 47K J		C162	VE-30007308	C CAP.	220PF 1KV K	
R928	VE-30012510	SMD RES.	1/10W 100R J		C163	VE-30009208	C CAP.	470PF 1KV K	
R929	VE-30012510	SMD RES.	1/10W 100R J		C165	VE-30016654	SMD CAP.	100nF 16V K R	
R930	VE-30012641	SMD RES.	1/10W 10K J		C166	VE-30000400	EL CAP.	47UF 50V M	
R931	VE-30012641	SMD RES.	1/10W 10K J		C167	VE-30009208	C CAP.	470PF 1KV K	
R932	VE-30012641	SMD RES.	1/10W 10K J		C168	VE-30000294	SMD CAP.	100nF 50V K	
R933	VE-30000718	CF RES.	1/4W 4.7K J		C170	VE-30000352	EL CAP.	100UF 16V M	
R934	VE-30012692	SMD RES.	1/10W 4.7K J		C171	VE-30000352	EL CAP.	100UF 16V M	
R935	VE-30012662	SMD RES.	1/10W 2.7K J		C172	VE-30016654	SMD CAP.	100nF 16V K R	
R936	VE-30000718	CF RES.	1/4W 4.7K J		C173	VE-30000315	SMD CAP.	220nF 25V Z	
R937	VE-30000459	CF RES.	1/4W 100R J		C201	VE-30000360	EL CAP.	1000UF 25V M	
R938	VE-30012509	SMD RES.	1/10W 100K J		C202	VE-30000106	MKT CAP.	47nF 100V J	
R939	VE-30012692	SMD RES.	1/10W 4.7K J		C203	VE-30000099	MKT CAP.	33NF 63V J	
R940	VE-30000500	CF RES.	1/4W 12K J		C204	VE-30000345	EL CAP.	10UF 50V M	
R941	VE-30000588	SMD RES.	1/10W 220R J		C206	VE-30000315	SMD CAP.	220nF 25V Z	
R942	VE-30000588	SMD RES.	1/10W 220R J		C207	VE-30000362	EL CAP.	1UF 50V M	
R943	VE-30000471	CF RES.	1/4W 10K J		C208	VE-30000415	EL CAP.	4.7UF 250V M	
R944	VE-30012641	SMD RES.	1/10W 10K J		C209	VE-30000224	SMD CAP.	220PF 50V J	
R945	VE-30000471	CF RES.	1/4W 10K J		C210	VE-30000149	MKP CAP.	2.7nF 2KV 3.5%	
R946	VE-30012657	SMD RES.	1/10W 1K J		C211	VE-30000179	MKP CAP.	9.1nF 1600V 3.5%	
R950	VE-30012657	SMD RES.	1/10W 1K J		C212	VE-30000137	MKP CAP.	15nF 630V J	
R951	VE-30012657	SMD RES.	1/10W 1K J		C213	VE-30007215	MKP CAP.	1.2UF 250V J	
R952	VE-30012657	SMD RES.	1/10W 1K J		C214	VE-30000415	EL CAP.	4.7UF 250V M	
R953	VE-30000466	CF RES.	1/4W 1K J		C215	VE-30000166	MKP CAP.	56nF 250V J	
R955	VE-30012657	SMD RES.	1/10W 1K J		C216	VE-30000415	EL CAP.	4.7UF 250V M	
R956	VE-30012510	SMD RES.	1/10W 100R J		C222	VE-30000431	C CAP.	100PF 1KV M	
R957	VE-30012655	SMD RES.	1/10W 180R J		C223	VE-30000351	EL CAP.	100F 350V M	
R958	VE-30014022	SMD RES.	1/10W 47R J		C225	VE-30000359	EL CAP.	1000UF 16V M	
R959	VE-30000466	CF RES.	1/4W 1K J		C226	VE-30000356	EL CAP.	100UF 63V M	
R960	VE-30000471	CF RES.	1/4W 10K J		C228	VE-30000360	EL CAP.	1000UF 25V M	
R961	VE-30000718	CF RES.	1/4W 4.7K J		C232	VE-30000225	C CAP.	220PF 50V J SL	
R964	VE-30012641	SMD RES.	1/10W 10K J		C240	VE-30000400	EL CAP.	47UF 50V M	
R965	VE-30012657	SMD RES.	1/10W 1K J		C250	VE-30000304	SMD CAP.	1.8nF 50V K R	
R966	VE-30012641	SMD RES.	1/10W 10K J		C251	VE-30000359	EL CAP.	100UF 16V M	
					C252	VE-30000289	SMD CAP.	10nF 50V K R	
					C253	VE-30000294	SMD CAP.	100nF 50V K	
					C254	VE-30000360	EL CAP.	1000UF 25V M	
					C255	VE-30000294	SMD CAP.	100nF 50V K	
					C256	VE-30000092	MKT CAP.	220nF 63V J	
					C257	VE-30000304	SMD CAP.	1.8nF 50V K R	
					C258	VE-30000322	SMD CAP.	3.3nF 50V K	
					C305	VE-30000294	SMD CAP.	100nF 50V K	
					C313	VE-30000189	SMD CAP.	100PF 50V J	
					C321	VE-30000352	EL CAP.	100UF 16V M	
CAPACITOR									
C100	VE-30000098	MKT CAP.	3.3NF 63V J						
C101	VE-30000371	EL CAP.	22UF 50V M						
C102	VE-30000294	SMD CAP.	100N 50V K						
C103	VE-30000294	SMD CAP.	100NF 50V K						
C104	VE-30012323	MKT CAP.	1nF 100V J						
C105	VE-30000284	SMD CAP.	1nF 50V K R						

[AV28BH7EES / AV28BH7EEB]

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C322	VE-30000352	EL CAP.	100UF 16V M	
C324	VE-30000294	SMD CAP.	100NF 50V K	
C333	VE-30000294	SMD CAP.	100NF 50V K	
C402	VE-30000345	EL CAP.	10UF 50V M	
C403	VE-30000384	EL CAP.	2.2UF 50V M	
C404	VE-30000284	SMD CAP.	1NF 50V K R	
C405	VE-30000284	SMD CAP.	1NF 50V K R	
C406	VE-30000224	SMD CAP.	220PF 50V J	
C407	VE-30000312	SMD CAP.	22NF 50V K	
C408	VE-30000371	EL CAP.	22UF 50V M	
C409	VE-30000294	SMD CAP.	100NF 50V K	
C410	VE-30000294	SMD CAP.	100NF 50V K	
C411	VE-30000109	MKT CAP.	470NF 63V J	
C412	VE-30000384	EL CAP.	2.2UF 50V M	
C413	VE-30000294	SMD CAP.	100NF 50V K	
C414	VE-30000294	SMD CAP.	100NF 50V K	
C417	VE-30000294	SMD CAP.	100NF 50V K	
C418	VE-30000294	SMD CAP.	100NF 50V K	
C419	VE-30000294	SMD CAP.	100NF 50V K	
C427	VE-30000294	SMD CAP.	100NF 50V K	
C428	VE-30000294	SMD CAP.	100NF 50V K	
C440	VE-30000400	EL CAP.	47U 50V M	
C441	VE-30000220	SMD CAP.	22PF 50V J	
C442	VE-30000294	SMD CAP.	100NF 50V K	
C443	VE-30013411	SMD CAP.	180PF 50V J	
C450	VE-30000345	EL CAP.	10UF 50V M	
C451	VE-30000294	SMD CAP.	100NF 50V K	
C453	VE-30000355	EL CAP.	100UF 50V M	
C454	VE-30000294	SMD CAP.	100NF 50V K	
C455	VE-30000345	EL CAP.	10UF 50V M	
C456	VE-30000352	EL CAP.	100UF 16V M	
C457	VE-30000294	SMD CAP.	100NF 50V K	
C468	VE-30000294	SMD CAP.	100NF 50V K	
C478	VE-30000294	SMD CAP.	100NF 50V K	
C492	VE-30000294	SMD CAP.	100NF 50V K	
C497	VE-30000294	SMD CAP.	100NF 50V K	
C498	VE-30000294	SMD CAP.	100NF 50V K	
C499	VE-30000362	EL CAP.	1UF 50V M	
C500	VE-30000352	EL CAP.	100UF 16V M	
C505	VE-30000294	SMD CAP.	100NF 50V K	
C506	VE-30000345	EL CAP.	10U 50V M	
C509	VE-30000186	SMD CAP.	10PF 50V D	
C510	VE-30000186	SMD CAP.	10PF 50V D	
C511	VE-30000341	SMD CAP.	68NF 50V K	
C610	VE-30000074	MKT CAP.	100NF 63V J	
C801	VE-30000362	EL CAP.	1UF 50V M	
C802	VE-30000362	EL CAP.	1UF 50V M	
C803	VE-30000362	EL CAP.	1UF 50V M	
C804	VE-30000409	EL CAP.	470UF 25V M	
C805	VE-30000294	SMD CAP.	100NF 50V K	
C806	VE-30000409	EL CAP.	470UF 25V M	
C807	VE-30000294	SMD CAP.	100NF 50V K	
C808	VE-30000074	MKT CAP.	100NF 63V J	
C809	VE-30000074	MKT CAP.	100NF 63V J	
C819	VE-30000309	SMD CAP.	2.2NF 50V K R	
C820	VE-30000309	SMD CAP.	2.2NF 50V K R	
C821	VE-30000309	SMD CAP.	2.2NF 50V K R	
C822	VE-30000309	SMD CAP.	2.2NF 50V K R	
C900	VE-30000371	EL CAP.	22UF 50V M	
C901	VE-30016654	SMD CAP.	100NF 16V K R	
C902	VE-30016654	SMD CAP.	100NF 16V K R	
C903	VE-30016654	SMD CAP.	100NF 16V K R	
C904	VE-30000074	MKT CAP.	100NF 63V J	
C905	VE-30000371	EL CAP.	22UF 50V M	
C906	VE-30016654	SMD CAP.	100NF 16V K R	
C907	VE-30000074	MKT CAP.	100NF 63V J	
C908	VE-30016654	SMD CAP.	100NF 16V K R	
C909	VE-30016654	SMD CAP.	100NF 16V K R	
C910	VE-30016654	SMD CAP.	100NF 16V K R	
C911	VE-30000352	EL CAP.	100UF 16V M	
C912	VE-30012569	SMD CAP.	33PF 50V J	
C913	VE-30012569	SMD CAP.	33PF 50V J	
C914	VE-30000371	EL CAP.	22UF 50V M	
C915	VE-30016654	SMD CAP.	100NF 16V K R	
C916	VE-30016654	SMD CAP.	100NF 16V K R	
C917	VE-30016654	SMD CAP.	100NF 16V K R	
C918	VE-30016654	SMD CAP.	100NF 16V K R	
C919	VE-30000375	EL CAP.	220UF 16V M	
C920	VE-30000384	EL CAP.	2.2UF 50V M	
C921	VE-30016654	SMD CAP.	100NF 16V K R	
C926	VE-30016654	SMD CAP.	100NF 16V K R	
C927	VE-30016654	SMD CAP.	100NF 16V K R	
C930	VE-30000345	EL CAP.	10UF 50V M	
C931	VE-30000257	C CAP.	470PF 50V J SL	


△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C932	VE-30016654	SMD CAP.	100NF 16V K R	
C933	VE-30000294	SMD CAP.	100NF 50V K	
TRANS F				
△ TR101	VE-30016819	SMPS TRF		
TR201	VE-30006743	TRF. HORIZONTAL DRIVER		
△ TR202	VE-30016922	FBT TRF		
COIL				
L101	VE-30006712	FERRITE BEAD		
L102	VE-30007775	PFC COIL	1MH 1KHZ 2A	
△ L103	VE-30006744	LINE FILTER	16MH	
△ L104	VE-30006744	LINE FILTER	16MH	
L106	VE-30006712	FERRITE BEAD		
L107	VE-30001960	FERIT BAR		
L108	VE-30001960	FERIT BAR		
L109	VE-30001960	FERIT BAR		
L201	VE-30007771	FIXED COIL	100UH	
L202	VE-30007757	COIL INJECTION EW	6MH	
L203	VE-30007770	FILTER COIL	1MH	
L204	VE-30012271	LINEARTY COIL	4.3UH VOGT	
L205	VE-30007756	BRIDGE COIL	150UH 32KHZ	
L206	VE-30006712	FERRITE BEAD		
L207	VE-30006712	FERRITE BEAD		
L304	VE-30001992	FIXED COIL	10UH Q65 K-A	
L401	VE-30001986	FIXED COIL	3.3UH Q65 K	
L403	VE-30001979	FIXED COIL	1UH Q45 M-A	
L405	VE-30001987	FIXED COIL	4.7UH Q70 K-A	
L420	VE-30001996	FIXED COIL	22UH Q40 K	
L421	VE-30001992	FIXED COIL	10UH Q65 K-A	
L422	VE-30001994	FIXED COIL	22UH J AXIAL	
L423	VE-30001994	FIXED COIL	22UH J AXIAL	
L425	VE-30001971	FERRITE BEAT		
L801	VE-30002170	COIL FTZ/RAD		
L802	VE-30002170	COIL FTZ/RAD		
L900	VE-30001992	FIXED COIL	10UH Q65 K-A	
L901	VE-30001992	FIXED COIL	10UH Q65 K-A	
L902	VE-30001992	FIXED COIL	10UH Q65 K-A	
L903	VE-30001992	FIXED COIL	10UH Q65 K-A	
L904	VE-30001987	FIXED COIL	4.7UH Q70 K-A	
L905	VE-30001984	FIXED COIL	2.2UH Q55 M-A	
L906	VE-30002171	CHOKE PEAKING COIL	22UH K	
DIODE				
D101	VE-30001285	DIODE		
D102	VE-30001291	DIODE		
D103	VE-30007768	DIODE		
D104	VE-30007768	DIODE		
D105	VE-30007768	DIODE		
D106	VE-30007758	BRIDGE DIODE		
D108	VE-30001318	DIODE		
D109	VE-30009699	ZENER DIODE		
D110	VE-20063054	DIODE		
D111	VE-30001299	DIODE		
D112	VE-30001302	DIODE		
D113	VE-30001302	DIODE		
D114	VE-30001302	DIODE		
D115	VE-30001285	DIODE		
D116	VE-30007760	ZENER DIODE		
D117	VE-30001285	DIODE		
D118	VE-30007760	ZENER DIODE		
D119	VE-30001284	DIODE		
D120	VE-30001291	DIODE		
D121	VE-30001318	DIODE		
D122	VE-30001318	DIODE		
D123	VE-30001285	DIODE		
D126	VE-30001284	DIODE		
D127	VE-30001284	DIODE		
D128	VE-30001284	DIODE		
D201	VE-30001291	DIODE		
D202	VE-30001285	DIODE		
D203	VE-30007760	ZENER DIODE		
D205	VE-30007763	ZENER DIODE		
D206	VE-30007678	DIODE GUC		
D207	VE-30007668	DIODE		
D208	VE-30001291	DIODE		
D209	VE-30001291	DIODE		
D210	VE-30001299	DIODE		

[AV28BH7EES / AV28BH7EEB]

▲ Symbol No.	Part No.	Part Name	Description	▲ Symbol No.	Part No.	Part Name	Description								
DIODE															
D211	VE-30001299	DIODE		▲ F101	VE-20000849	FUSE ASSY	3.15A								
D212	VE-30001291	DIODE		▲ F102	VE-30009037	FUSE	6.3A								
D213	VE-30001291	DIODE		▲ F103	VE-30009037	FUSE	6.3A								
D214	VE-30007763	ZENER DIODE		RL2	VE-30002183	RELAY									
D215	VE-30007762	ZENER DIODE		S133	VE-30000575	SMD RES.	1/10W 2K J								
D216	VE-30001285	DIODE		T401	VE-30001724	SER FILTER									
D218	VE-30001291	DIODE		T402	VE-30001726	SER FILTER									
D219	VE-30001291	DIODE		TU401	VE-30009637	TUNER									
D220	VE-30001284	DIODE		VL401	VE-30002037	ADJ COIL VIF									
D221	VE-30001284	DIODE		VR127	VE-30001041	ADJ RES.	0.15W 1K M VER								
D222	VE-30001284	DIODE		X900	VE-30006662	XTAL									
D223	VE-30001285	DIODE		Z401	VE-30001706	SAW FILTER									
D224	VE-30001285	DIODE		Z403	VE-30001692	SAW FILTER									
D225	VE-30001318	DIODE													
D403	VE-30001285	DIODE													
D900	VE-30012412	ZENER DIODE													
D901	VE-30007761	ZENER DIODE													
TRANSISTOR															
Q101	VE-30007801	TR		MULTISOUND P.W. BOARD ASS'Y (VE-30017302)											
Q103	VE-30007802	TR		Refer to PARTS LIST in page 27 for this P.W. board.											
Q104	VE-30007798	TR		FEATURE BOX P.W. BOARD ASS'Y (VE-30013755)											
Q105	VE-30007798	TR		Refer to PARTS LIST in page 29 for this P.W. board.											
Q106	VE-30007802	TR		CRT SOCKET P.W. BOARD ASS'Y (VE-30017303)											
Q107	VE-30007798	TR		Refer to PARTS LIST in page 30 for this P.W. board.											
Q108	VE-30007798	TR		FRONT CONTROL P.W. BOARD ASS'Y (VE-30017014)											
Q109	VE-30001457	TR		Refer to PARTS LIST in page 31 for this P.W. board.											
Q110	VE-30001457	TR		FRONT AV + HEADPHONE JACK P.W. BOARD ASS'Y (VE-30016761)											
Q112	VE-30001454	TR		Refer to PARTS LIST in page 31 for this P.W. board.											
Q113	VE-30001428	TR													
Q201	VE-30007802	TR													
Q202	VE-30016686	TR													
Q203	VE-30001458	TR													
Q204	VE-30001458	TR													
Q205	VE-30007799	TR													
Q206	VE-30001457	TR													
Q207	VE-30001457	TR													
Q208	VE-30001455	TR													
Q403	VE-30001457	TR													
Q408	VE-30007800	TR													
Q415	VE-30001457	TR													
Q801	VE-30001457	TR													
Q802	VE-30001457	TR													
Q900	VE-30001458	TR													
Q901	VE-30001457	TR													
Q902	VE-30001457	TR													
Q903	VE-30001457	TR													
Q904	VE-30001457	TR													
Q905	VE-30001457	TR													
Q906	VE-30001457	TR													
Q907	VE-30001457	TR													
Q908	VE-30001457	TR													
Q909	VE-30001458	TR													
Q910	VE-30001457	TR													
Q911	VE-30001457	TR													
IC								FRONT AV + HEADPHONE JACK P.W. BOARD ASS'Y (VE-30016761)							
▲ IC101	VE-30007442	IC		Refer to PARTS LIST in page 31 for this P.W. board.											
IC102	VE-30015087	IC													
IC103	VE-30015056	IC													
IC104	VE-30007444	IC													
IC105	VE-30001500	IC													
IC106	VE-30001668	IC													
IC201	VE-30007793	IC													
IC202	VE-30001506	IC													
IC302	VE-30015382	IC(MEMORY)													
IC304	VE-30016491	IC													
IC401	VE-30001495	IC													
IC801	VE-30007794	IC													
IC802	VE-30007794	IC													
IC900	VE-30013571	IC(MYCOM)													

AV28BH7ENS / AV28BH7ENB
 AV28BH7EPS / AV28BH7EPB
 AV28BH7EES / AV28BH7EEB

PACKING

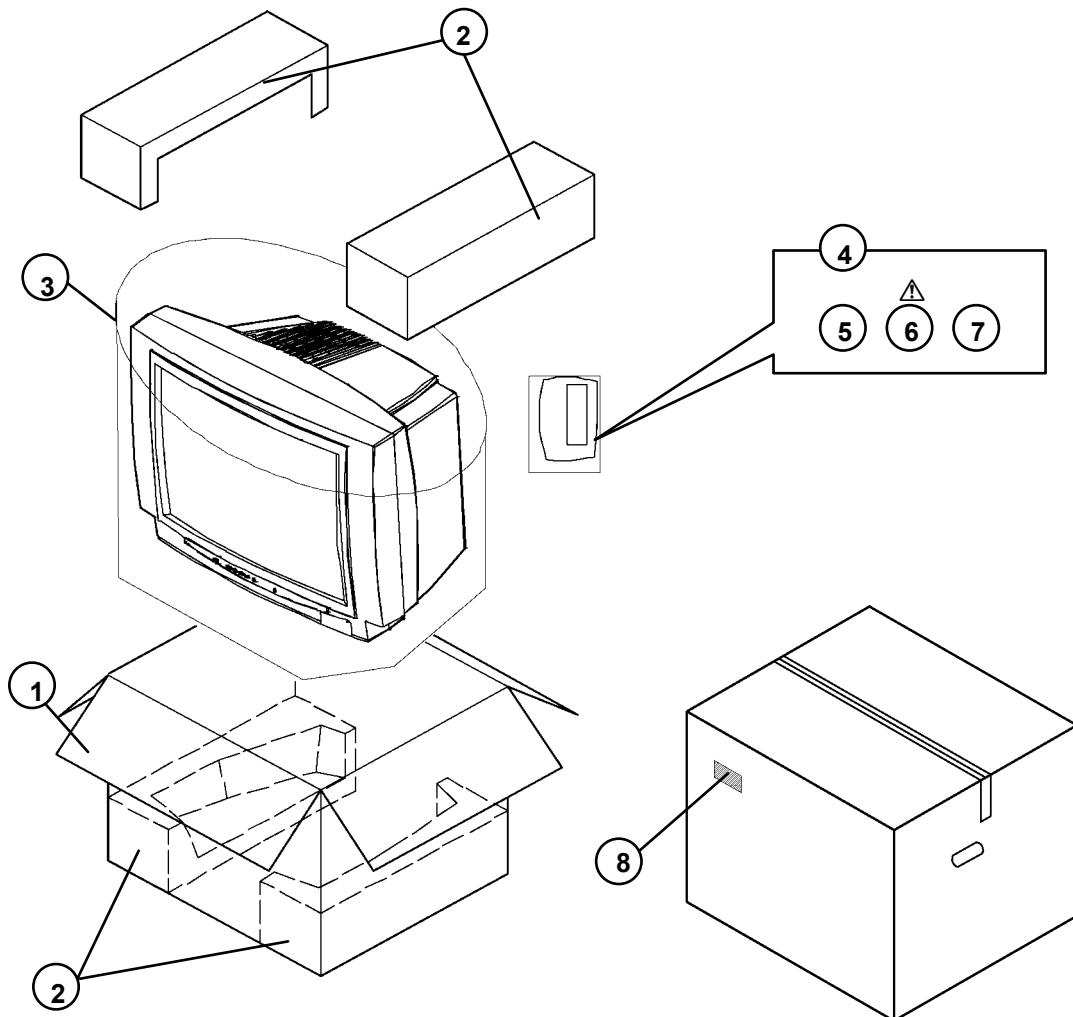

PACKING PARTS LIST

Ref. No.	Part No.	Part Name	Description
1	VE-50023336	F CARTON BOX	(AV28BH7ENS)
1	VE-50023328	F CARTON BOX	(AV28BH7ENB)
1	VE-50023340	F CARTON BOX	(AV28BH7EES)
1	VE-50023334	F CARTON BOX	(AV28BH7EEB)
1	VE-50023338	F CARTON BOX	(AV28BH7EPS)
1	VE-50023331	F CARTON BOX	(AV28BH7EPB)
2	VE-20069214 / 15	CUSHION ASS'Y	
3	VE-50020732	POLY BAG (1400*1000)	
4	VE-70000587	POLY BAG	
5	VE-30015781	REMOTE CONTROL UNIT (RM-C85)	
6	VE-50023325	INST BOOK	(AV28BH7ENS/ENB)
6	VE-50023332	INST BOOK	(AV28BH7EES/EEB)
6	VE-50023329	INST BOOK	(AV28BH7EPS/EPB)
7	BT-54013-2TK	WARRANTY CARD	
8	VE-20086449	LABEL	(AV28BH7ENS)
8	VE-20086440	LABEL	(AV28BH7ENB)
8	VE-20086455	LABEL	(AV28BH7EES)
8	VE-20086446	LABEL	(AV28BH7EEB)
8	VE-20086452	LABEL	(AV28BH7EPS)
8	VE-20086443	LABEL	(AV28BH7EPB)

JVC

VICTOR COMPANY OF JAPAN, LIMITED

HOME AV NETWORK BUSINESS UNIT 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama, Kanagawa-prefecture, 221-8528, Japan

Contents

Safety Precautions	1
Remote Control Buttons	2
Control Panel Buttons	3
Antenna Connections	3
Preparation	4
Before Switching on your TV	4
Power connection	4
Aerial Connections	4
How to connect the external equipments	4
Inserting batteries in the remote control handset	4
Switching the TV ON/OFF	4
To switch the TV on	4
To switch the TV off	4
Initial Settings	4
Operating with the onset buttons	5
Operating with Remote Control	5
Menu System	5
Sound Menu	5
Picture Menu	6
Feature Menu	7
Installation Menu	7
Other Features	9
Sound Mute	9
Stereo / Bilingual	9
Information on Screen	10
VCR / DVD Control Buttons and VCR / / DVD Switch 10	
Teletext	10
To operate Teletext	10
To select a page of Teletext	11
To Select Index Page	11
Searching for a teletext page while watching TV	11
To Select Double Height Text	11
To Reveal "concealed" Information	11
To Stop Automatic Page Change	11
To Select a Subcode Page	11
To exit Teletext	11
Fastext and Toptext	11
Connect the External Equipments	12
Via the Euroconnector	13
EXT 2 S Mode	13
Via the RCA jacks	13
Via the ANT (aerial) socket	13
TV and Video Recoder (VCR)	13
NTSC Playback	13
Copy Facility	13
Connecting Headphones	13
Tips	13
Specifications	14

Safety Precautions

1. Power Source

The receiver should be operated only from a **220-240V AC, 50 Hz.** outlet. Ensure you select the correct voltage setting for your convenience.

2. Power Cord

The power supply cord should be placed so that they are not likely to be walked on or pinched by items placed upon them or against them. Pay particular attention to cord where they enter the plug, power outlet, and the point where they exit from the receiver.

3. Moisture and Water

Do not use this equipment in a humid and damp place (avoid the bathroom, the sink in the kitchen, and near the washing machine). Do not expose this equipment to rain or water and do not place objects filled with liquids on it as this may be dangerous.

4. Cleaning

Before cleaning, unplug the receiver from the main supply outlet. Do not use liquid or aerosol cleaners. Use with soft and dry cloth.

5. Ventilation

The slots and openings on the receiver are intended for ventilation and to ensure reliable operation. To prevent overheating, these openings must not be blocked or covered in anyway.

6. Lightning

In case of storm and lightning or when going on holiday, disconnect the power cord from the wall outlet.

7. Replacement Part

When replacement parts are required, be sure the service technician has used replacement parts which are specified by the manufacturer or have the same specifications as the original one. Unauthorized substitutions may result in fire, electrical shock, or other hazards.

8. Servicing

Please refer all servicing to qualified personnel. Do not remove cover as this may result in electric shock.

9. Flame sources

Do not place naked flame sources on the apparatus.

10. Stand-By

Do not leave your TV stand-by or operating condition when you leave your house.

Warning!



Any intervention contrary to regulations, in particular, any modification of high voltage or a replacement of the picture tube may lead to an increased concentration of x-rays. Any television modified in this way no longer complies with license and must not be operated.

Instructions for waste disposal:

Packaging and packaging aids are recyclable and should principally be recycled. Packaging materials, such as foil bag, must be kept away from children.

Remote Control Buttons

- ① = Stand By / Power
- ② **0 - 9** = Direct Program
- ③ Colour Buttons
- ④ Standard Button
- ⑤ = Programme Up (Cursor Up)
- ⑥ **MENU** = Menu Button
- ⑦ = Cursor Right / Volume +
- ⑧ Teletext / VCR / DVD Control Buttons
- ⑨ = VCR / / DVD Switch
- ⑩ = Stereo / Bilingual Button
- ⑪ = Information Button
- ⑫ = Programme Down (Cursor Down)
- ⑬ = Cursor Left / Volume -
- ⑭ **AV** = AV Button
- ⑮ = Teletext Button
- ⑯ = Mute

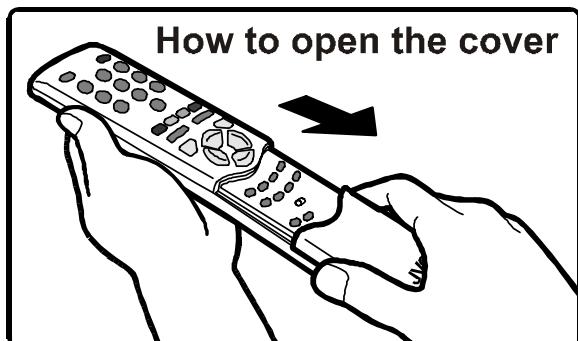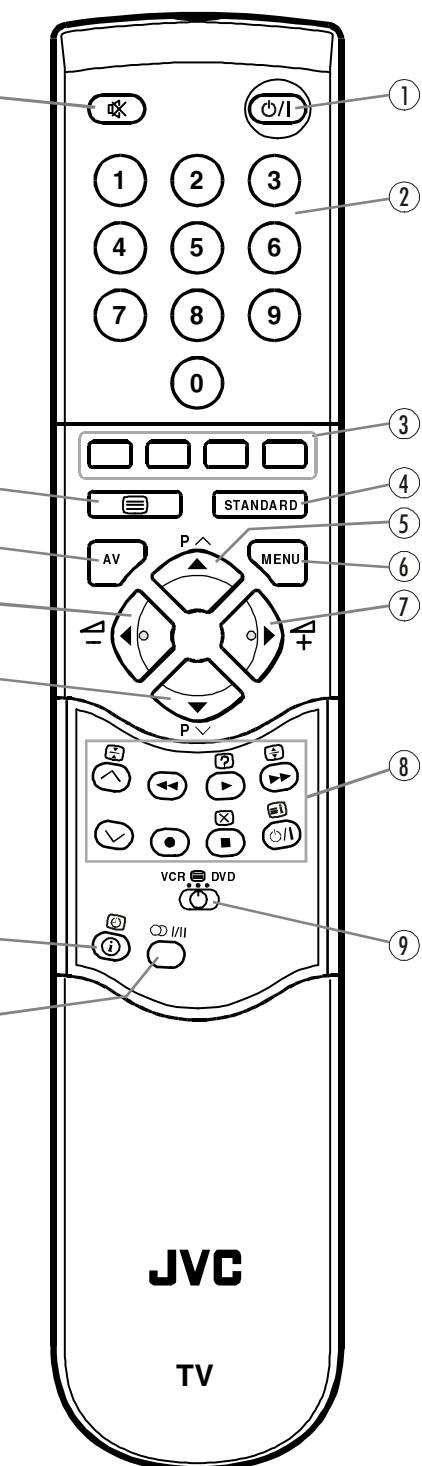



CAUTION
RISK OF ELECTRIC SHOCK



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock of persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.


Control Panel Buttons

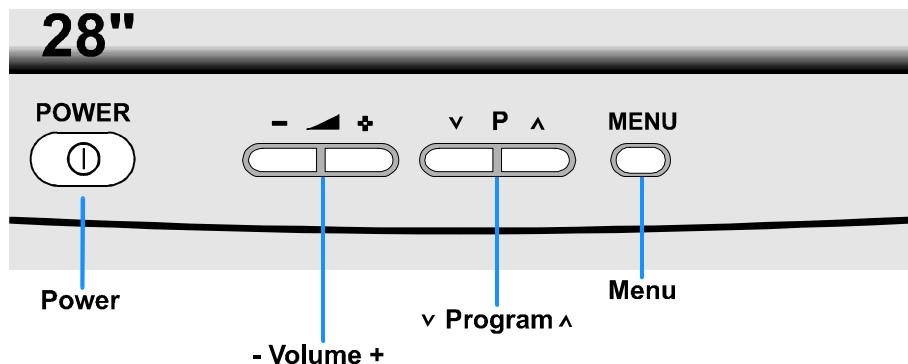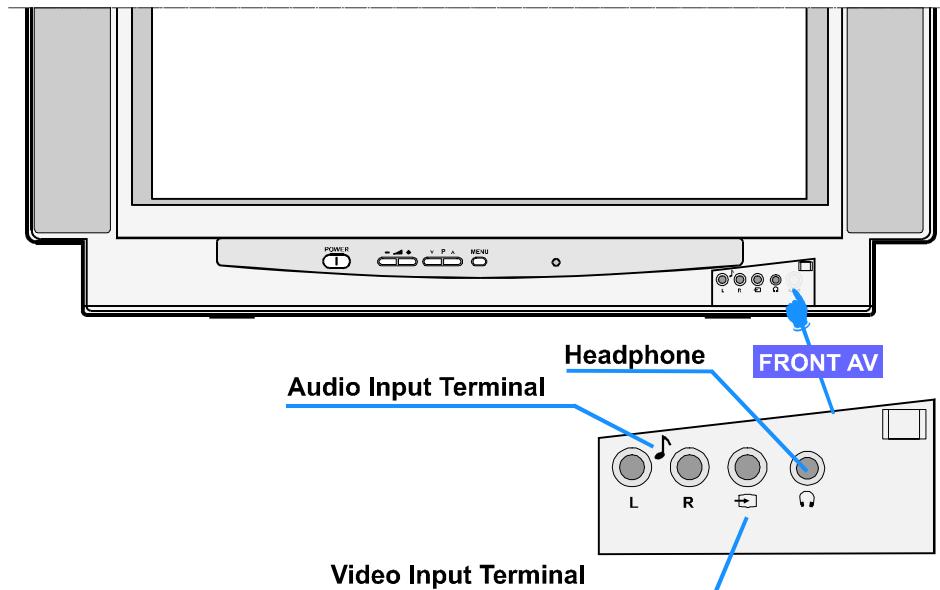



Antenna Connections

Outdoor Antenna Connections

VHF/UHF antenna
Method 1




Round 75 ohm coaxial cable


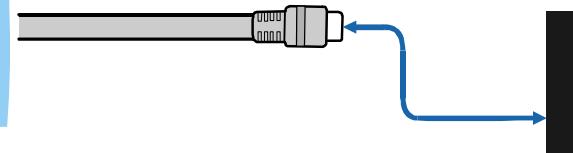


Rear of TV

VHF antenna
Method 2



Flat 300-ohm twin lead cable

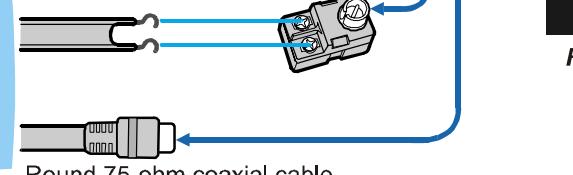

Rear of TV

Preparation

Place TV on a solid surface.

For ventilation, leave a space of at least 10 cm free all around the set. To prevent any fault and unsafe situations, please do not place any objects on top of the set.

Before Switching on your TV

Power connection

Important: The TV set is designed to operate on **220-240 V AC, 50 Hz**.

- After unpacking, allow the TV set to reach the ambient room temperature before you connect the set to the mains.

Aerial Connections

- Connect the aerial plug to the aerial input socket located at the back of the TV.


How to connect the external equipments

See "Connect the External Equipments" on page 12.

- See the instruction manuals provided with the external devices too.

Inserting batteries in the remote control handset

- Remove the battery cover located on the back of the handset by gently pulling upwards from the indicated part.
- Insert two **AAA (R03)** or equivalent type batteries inside.
- Replace the battery cover.

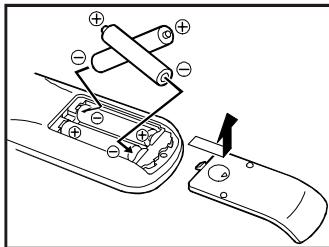

NOTE: Remove batteries from remote control handset when it is not to be used for a long period. Otherwise it can be damaged due to any leakage of batteries.

Switching the TV ON/OFF

You can operate your TV either using the remote control handset or directly using the TV onset buttons.

To switch the TV on

Your TV will switch on in two steps:

- 1- Press the power button located on the front of the TV. Then the TV switches itself to standby mode and the **RED LED** located below the TV turns on.

- 2- To switch on the TV from stand-by mode either:

Press a digit button on the remote control so that a programme number is selected,

or,

Press Standby / Power Button or Programme Up and Down buttons on the front of the TV or on the remote control respectively, so the TV will switch on and the **RED Led** will turn **GREEN**.

IMPORTANT:

- If no aerial signal is received at the selected program for a period of 5 minutes then your TV automatically switches into stand-by mode.

To switch the TV off

- Press the stand-by button on the remote control, so the TV will switch to stand-by mode and the **GREEN LED** will become **RED**, or,

- Press the power button located on the front of the TV.

NOTE: If you have switched off the TV set from the power button instead of the remote control, next time you press the power button, the TV set will switch on without going to the stand-by mode.

Initial Settings


When the TV is first turned on, it enters the initial setting mode, and the **AUTOSTORE** menu is displayed. Follow the instructions below to do the initial settings.



- The **AUTOSTORE** menu does not appear when your TV has been turned on once. In this case, use the "**LANGUAGE**", "**COUNTRY**" and "**AUTOSTORE**" items in the **INSTALL** menu to make the initial settings. For details, see "**Installation Menu**" on page 7.

- If you want to do the initial settings later, press **STANDARD** button to turn the menu off.

1. Press "**P ^**" or "**P ^**" button to select "**LANGUAGE**" (language) item. Then press the "**◀**" or "**▶**" button to enter the "**LANGUAGE**" sub-menu.

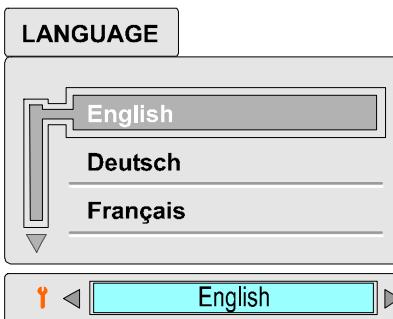


2. Press "**P ^**" or "**P ^**" button to select a language. Then press the "**◀**" or "**▶**" button to store it.

3. Press the **MENU** button to return to the **AUTOSTORE** menu.

4. Press "**P ^**" or "**P ^**" button to select "**COUNTRY**" item. Then press the "**◀**" or "**▶**" button to enter the "**COUNTRY**" sub-menu.



- Press "P ^" or "P ^" button to select the country where you are now located. Then press the "◀" or "▶" button to store it.
- Press the **MENU** button to return to the **AUTOSTORE** menu.
- Press "P ^" or "P ^" button to select "**Continue**" item. Then press "▶" button to start the **AUTOSTORE** function.
The **AUTOSTORE** function automatically stores the received channels in your TV's programme numbers.

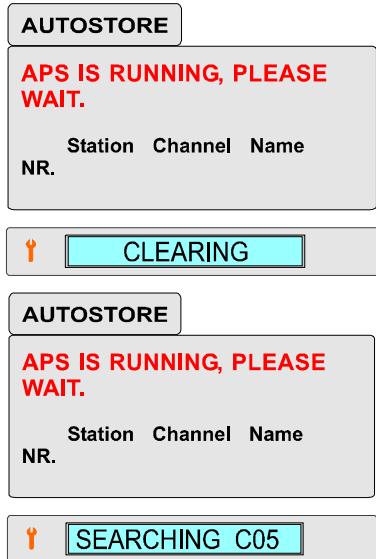

After the **AUTOSTORE** function is finalized, "**PROGRAM**" menu appears. You can delete a channel or swap two channel numbers. For details, see "**Program Menu**" on **page 9**.

- Press the **STANDARD** button to complete the initial settings.

If a channel you want to view is not stored, store it using the **TUNING** menu. For details, see "**Tuning Menu**" on **page 8**.

Operating with the onset buttons

Volume setting and programme selection can be made using the buttons on the front panel.

Volume Setting

- Press "- ▲" button to decrease volume or "▲ +" button to increase volume, so a volume level scale will be displayed on the screen.

Programme Selecting

- Press "P ^" button to select next programme or "▼ P" button to select the previous programme.

Entering Main Menu

- Press "**MENU**" button to enter main menu. In the main menu select submenu using "P ^" or "▼ P" button and enter the submenu using "▲ +" or "- ▲" button. To learn the usage of the menus, refer to the **Menu System** section of this manual.

Operating with Remote Control

The remote control handset of your TV is designed to control all the functions of the model you selected. The functions will be described in accordance with the menu system of your TV.

Functions which you can use out of menu system are described below.


Volume Setting

Press "▲" button to increase volume.

Press "▼" button to decrease volume.

Programme Selecting (Previous or next programme)

- Press "P ^" button to select the previous programme.
- Press "P ^" button to select the next programme.

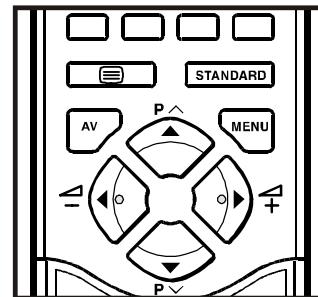

Programme Selecting (direct access):

Press digit buttons on the remote control handset to select programmes between 0 and 9. TV will switch to the selected program after a short delay.

- For a two or three digit program number enter the second or third digit after pressing the first digit within 2 seconds.

Menu System


Your TV has been designed with a menu system. Display "**MENU**" (main menu) and enter one of four menus (**PICTURE**, **SOUND**, **INSTALL** and **FEATURE**).

- Press "**MENU**" button to display "**MENU**" (main menu). The menu titles will be displayed in the main menu.
- Press "P ^" or "P ^" button to select a menu title, then press "◀" or "▶" button to enter the menu.
- To exit a menu, press "**STANDARD**" button.
- To go to the previous menu, press "**MENU**" button.

Sound Menu

To change sound settings


- Press "**MENU**" button, now you are in main menu. In the main menu, select **SOUND** using "P ^" or "P ^" button, then enter the sound menu pressing "◀" or "▶" button.

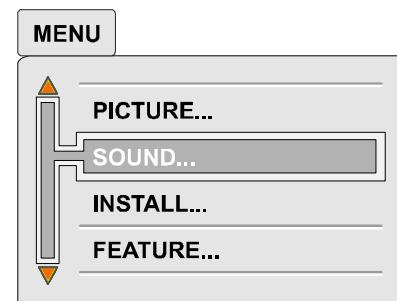

Setting Volume:


Using "P ^" or "P ^" button to select Volume.

- Press "▶" button to increase volume.
- Press "◀" button to decrease volume.

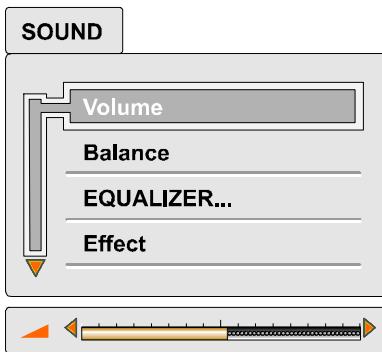

Setting Balance:


- Using “P ^” or “P ^” button select Balance.
- Press “▶” button to change balance rightward.
- Press “◀” button to change balance leftward.

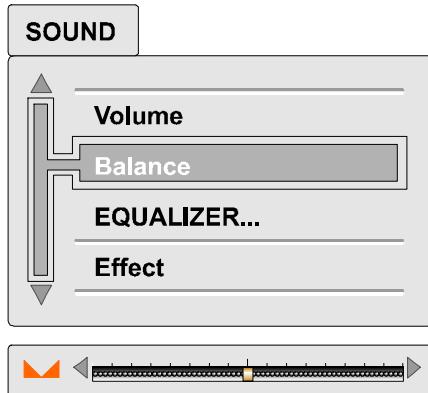

Equalizer


You can enter Equalizer menu by using “◀” or “▶” button after selecting this item in sound menu.

You can also select between the following modes: **Flat, pop, rock, jazz, classic** and **user** using the “◀” or “▶” button. When you come to user, press “▶” button to select the 120Hz item first. Using “P ^” or “P ^” button adjust the level and then press “▶” button to adjust the levels of other frequencies. When you press menu or standard button, the changes will be stored in the user item automatically.

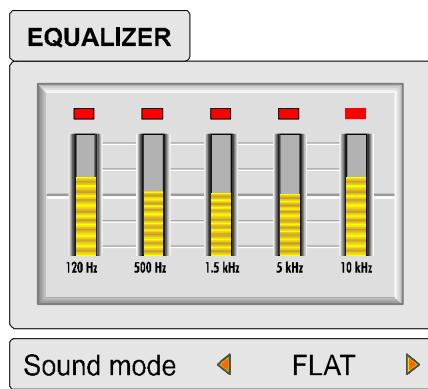

Effect:


You can use this feature to switch on and off sound effect. Pressing “◀” or “▶” button will turn on and off this feature. If the current sound system is **MONO** and the sound effect is set **ON**, then the sound will be heard as if it is **STEREO**. If the current sound system is **STEREO**, switching this effect on will make the sound deeper. Switching it off will make no change in **MONO** and **STEREO**.

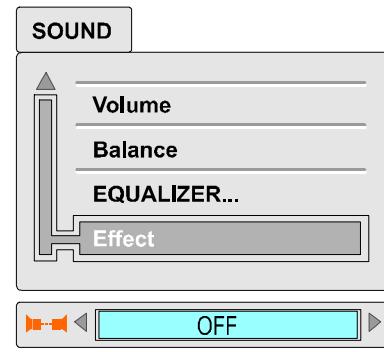

Picture Menu


To change picture settings:

- Press “**MENU**” button, now you are in main menu. In the main menu, select **PICTURE** using “P ^” or “P ^” button, then enter the picture menu pressing “◀” or “▶” button.

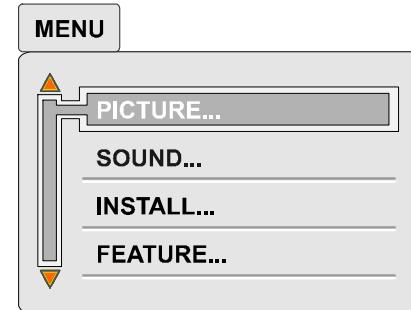


You can change the values of this items firstly by selecting the item by “P ^” or “P ^” button and then by using “◀” or “▶” button. The **PICTURE** menu disappears and level indicators are displayed while items are changed. The **PICTURE** menu is restored after adjustment is finished.

- You can change the **Brightness** by “◀” or “▶” button after selecting this item.
- You can change the **Contrast** by “◀” or “▶” button after selecting this item.
- You can change the **Colour** by “◀” or “▶” button after selecting this item.
- You can change the **Sharpness** by “◀” or “▶” button after selecting this item.
- You can adjust the **Tint** item as normal, warm and cool. Using “◀” or “▶” button toggle between these three settings.

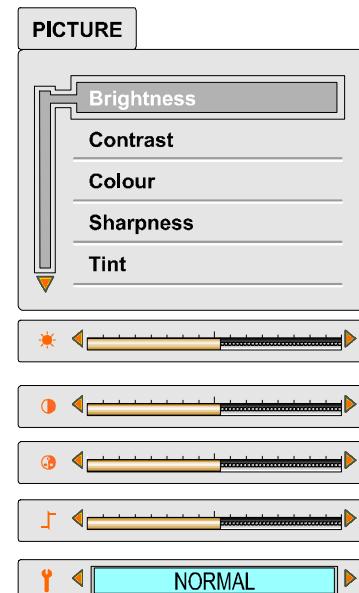

- The **Noise reduction** can be adjusted in four different levels: **Minimum**, **Medium**, **Maximum** and **Auto**. Additionally it can be cancelled by selecting the **OFF** option. Pressing “◀” or “▶” button toggles between these five settings.

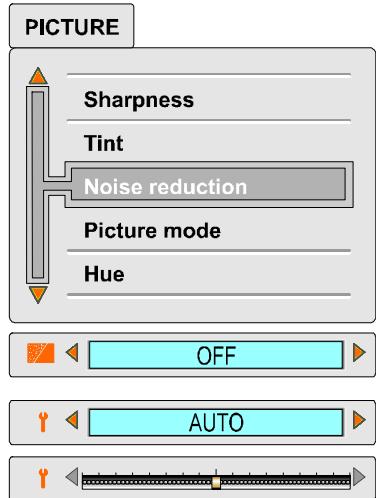

- The **Picture Mode** can be three different modes: Auto, 4:3 or 16:9 modes. Using “◀” or “▶” button toggle between these different screen formats.

The Picture Mode can be stored for all channels (200 channels) individually.

- You can change the **Hue** for NTSC systems by “◀” or “▶” button after selecting this item. A level indicator for Hue is displayed while changing this item. The Hue bar is displayed while an NTSC signal is input from the **EXT 1**, **EXT 2** or **F AV (Front AV)** terminal.


Recalling Factory settings.

You can re-set the current **PICTURE** menu settings (except Picture Mode / Tint setting) to the default settings.

- Press **“STANDARD”** button when no menu appears.

Feature Menu

- Press **“MENU”** button, now you are in main menu. In the main menu, select **FEATURE**, using “**P ^**” or “**P ^**” button. Then enter the feature menu pressing “◀” or “▶” button.

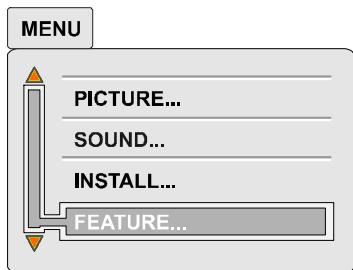

Sleep timer


The sleep timer is used to turn the TV off after a defined period. Press “◀” or “▶” button to choose a priod of time after selecting this item. The timer can be programmed between Off and 120 minutes in steps of 10 minutes. One minute before the **“Sleep timer”** function turns the TV off, the remaining time will be displayed.

Child lock

You can disable the control panel buttons (except the POWER button) with this item.

Press “◀” or “▶” button to change the setting to ON or OFF after selecting this item.

When you set this item to ON, the TV can be operated only by using the remote control handset.

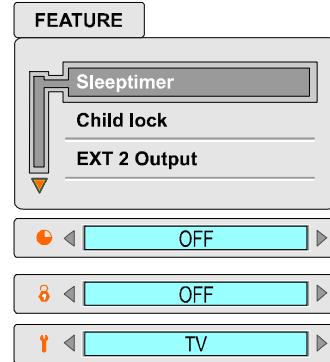

Setting External Source Output

- You can use this menu to select the internal or external source that will be output at **EXT 2** terminal.
- In the **“FEATURE”** menu select **“EXT 2 Output”** using “**P ^**” or “**P ^**” button. Then select the source you want to be output at **EXT 2** pressing “◀” or “▶” button (one of the sources: **TV**, **EXT 1** or **F AV (Front AV)**).

Installation Menu


- Press **“MENU”** button, now you are in main menu. In the main menu, select **INSTALL**, using “**P ^**” or “**P ^**” button. Then enter the **INSTALL** menu pressing “◀” or “▶” button.



Menu Language Selection

Press the “**P ^**” or “**P ^**” button to select “**LANGUAGE**” item.

Press “◀” or “▶” button to enter “**LANGUAGE**” sub-menu.

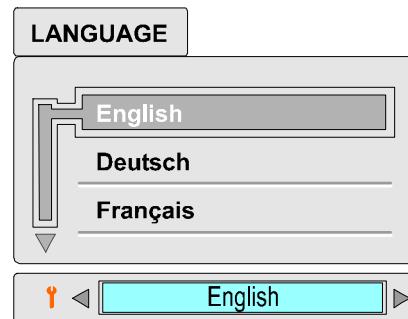

Press “**P ^**” or “**P ^**” button to select the desired menu language:

- After selecting the menu language press “◀” or “▶” button to store the selected language.
- Press **MENU** button to the upper menu or press **STANDARD** button to turn the menu off.

Country Selection

- Press the “**P ^**” or “**P ^**” button to select the “**COUNTRY**” item.
- Press “◀” or “▶” button to enter the “**COUNTRY**” sub-menu.

- Press “P ^” or “P ^” button to select the desired country settings.
- After selecting the country, press the “◀” or “▶” button to store the selected country.
- Press **MENU** key to go to the upper menu or press the **STANDARD** button to turn the menu off.




Tuning Menu

You can store a channel manually, or modify the current settings of a channel (for example, changing the channel name).

If you want to modify the current settings of a channel, select the channel of which you want to modify the setting. Then display the main menu on the screen.


- Press “P ^” or “P ^” button to select “TUNING” item.
- Press “◀” or “▶” button to enter the “TUNING” sub-menu.

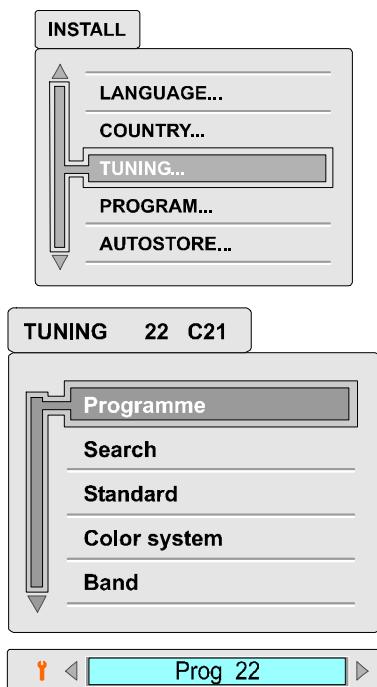

1. Press “P ^” or “P ^” button to select an item in the “TUNING” menu. Then press “◀” or “▶” button to change the setting.

For details of each item, see the explanations below.

2. After all settings of a channel are completed, press “P ^” or “P ^” button to select “Programme” item. Then press “◀” or “▶” button to select a programme number which you want to store the setting.



3. Press “P ^” or “P ^” button to select “Store” item. Then press “◀” or “▶” button to store the setting.

The “STORED” appears at the bottom of the menu for 3 second.



4. Press the **MENU** button to go to the upper menu, or press the “Standard” button to turn the menu off.

In an AV mode, you can change only the “Mode” / “Colour system” setting.

Search:

You can search a channel manually.

- Select “Search” item. Then press “◀” or “▶” button to start searching. “SEARCHING” is displayed while the TV is searching a channel.
- Searching stops when the TV finds a channel. Then the channel is displayed.
- Press “◀” or “▶” button repeatedly until the channel you want appears.



Standard:

The “Standard” setting is fixed to “B/G”. You cannot change this item’s setting.




Colour system:

- If the picture is not clear or no colour appears, select the correct colour system to display the picture normally.
- Select “Colour system” item. Then press “◀” or “▶” button to select a colour system.



Band, Channel:

- If you know a channel number, you can find it directly by entering the channel number.
- Select the “Band” item. Then press “◀” or “▶” button to select the band (C or S) where the channel you want is located.




- Select the “Channel” item. Then press “◀” or “▶” button to select the channel number, or enter the channel number with the digit buttons.
- The available channel numbers differ depending on your “COUNTRY” and “Standard” settings.



Fine tuning:

If the channel reception is poor, fine-tune the channel.


- Select “Fine tuning” item. Then press “◀” or “▶” button to fine-tune the channel.



Name:

You can store the channel name or change it.


- Select “Name” item. Then press “◀” or “▶” button to display a cursor.
- Press “P ^” or “P ^” button to select a character and press “◀” or “▶” button to move the cursor.
- After the name is completed, press the **MENU** button.



Mode:

Set "Mode" item to "TV" for the TV channels.

- When you watch a picture from your VCR and the picture is unstable, you may improve it by changing the "Mode" setting from "TV" to "VCR".




Program Menu

In order to edit the program list you should enter **PROGRAM** menu.

Select **PROGRAM** item in the **INSTALL** menu, then press "◀" or "▶" button to enter the **PROGRAM** menu. You can change and delete the programs on the list, according to your order preference. The following menu will appear:

You can select the programs in the program list by pressing "P^", "Pv" or "◀", "▶" button on the remote control. Whenever you select a program from the list, colour of the selected program item will change and this program will be displayed on the screen.

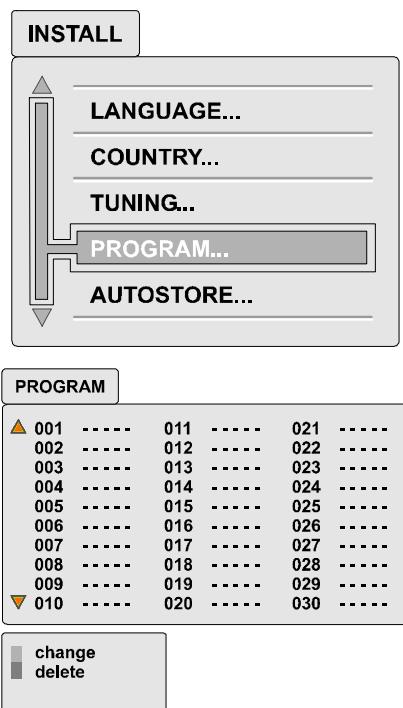

Change

First select the program you want to change by using "P^", "Pv" or "◀", "▶" buttons as described above for move item. Press **Blue** button, colour of program name in the list you preselected become blue.

Now using "P^", "Pv" or "◀", "▶" button select the second program in the list which you want to exchange with the previously selected program.

Press **Blue** button again, so the previously and the second selected program will be exchanged.


Delete

First select the program you want to delete by using "P^", "Pv" or "◀", "▶" button. After program is selected press **Red** button.


The selected program will be removed from the program list and the list will shift one step upwards at the position of deleted program.

Autostore Menu


- After the **MENU** language and Country selections, the **AUTOSTORE** function is ready to start. Select the **AUTOSTORE** item in the **INSTALL** menu, then press "◀" or "▶" button to enter the **AUTOSTORE** menu.

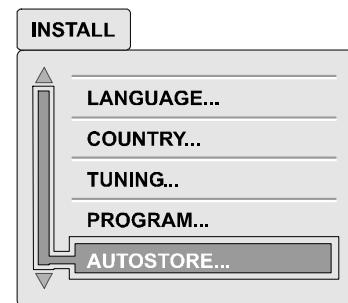

- A warning message "All prestored programmes will be erased!" appears in a message box.

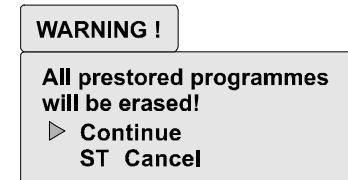

- To start **AUTOSTORE** press "▶" button. Firstly all programs will be cleared. Then Preset installation will take place storing the available channels. Finally the sorting order of programs which depends on selected country and menu language settings will start.
- To cancel **AUTOSTORE** press **STANDARD** button. The operation will be cancelled and TV will restore to normal operation mode.

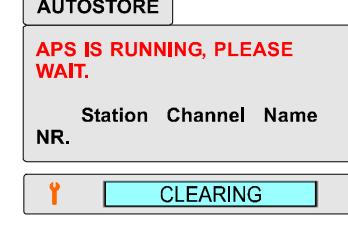

- After the **AUTOSTORE** function is finalized, "**PROGRAM**" menu appears.

Other Features



Sound Mute

To cut off the sound of the TV press "M" button. The sound will be cut off. To cancel mute, press "M" or "L" or "R" button. The volume level will be the same as the level before mute if you cancel mute pressing "M" button again.

Stereo / Bilingual

- If the TV channel you are watching broadcasts in two languages (e.g. Eurosport), you can select the dubbed or the original language, pressing the "O" button.

- When the stereo broadcast is received poorly, you can change from stereo to mono sound so that you can hear the broadcast more clearly and easily.

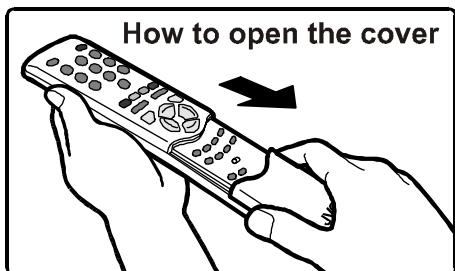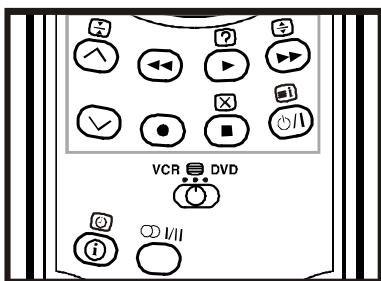

Information on Screen

First pressing the “” button displays the current status “**Programme number**”, “**Station name**” and “**Sound status**”.

Pressing this button again displays the current time.

Pressing this button once more remove the on-screen display.

To Display the Time

- While watching a TV programme with Teletext transmission press “” button twice. The current time information, captured from Teletext will be displayed at the upper left corner of the screen.
- If the programme being watched does not have Teletext transmission, no time information will be displayed.
- The time information will disappear after pressing “” button again.

Standard

You can re-set the current **PICTURE** menu settings (except Picture Mode / Tint setting) to the default settings.

- Press “**STANDARD**” button when no menu appears.

VCR / DVD Control Buttons and VCR / / DVD Switch

The buttons can be used to operate a JVC brand VCR or DVD player. Pressing the button having the same appearance as the original remote control button of a device makes the function work in the same way as the original remote control.

1. Set the VCR / / DVD Switch to the VCR or DVD position.

VCR:

When you are operating the VCR, set the switch to the VCR position.

DVD:

When you are operating the DVD player, set the switch to the DVD position.

(Text):

When you are viewing Teletext programmes, set the switch to the (Text) position.

2. Press the VCR / DVD Control Button to control your VCR or DVD player.

Note:

- If your device is not made by JVC, these buttons cannot be used.
- Even if your device is made by JVC, some of these buttons or any one of the buttons may not work, depending on the device.
- You can use the \wedge / \vee buttons to choose a TV channel which the VCR will receive or choose the chapter which the DVD player plays back.
- Some DVD player models use the \wedge / \vee buttons for operating of Fast forward/backward functions and choosing the chapter. In this case, the \ll / \gg the buttons do not work.

Teletext

Teletext is an information system that displays text on your TV screen. Using the Teletext information system you can view a page of information on a subject that is available in the list of contents (index).



No on screen display will be available in text mode.

While no teletext information available in the selected programme, if you press (teletext) “” button, ‘No Teletext Transmission’ warning appears at the center of the screen.

No contrast, brightness or colour control, but volume control is available in text mode.

To operate Teletext

- Select a TV station on which Teletext is being transmitted.
- Press (teletext) “” button. Usually the list of contents (index) is displayed on the screen.
- Set the VCR / / DVD switch to the (Text) position.

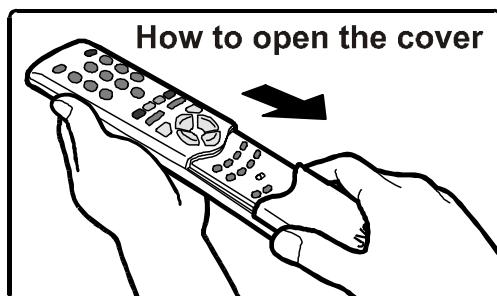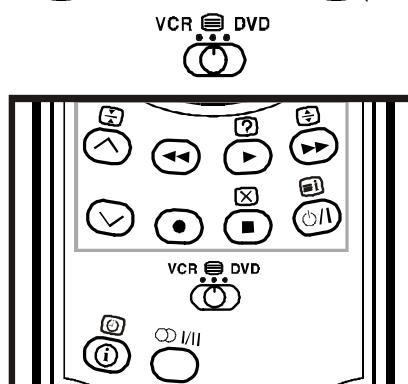


To select a page of Teletext

- Press the appropriate digit buttons for the required Teletext page number.

The selected page number is displayed at the top left corner of the screen. The Teletext page counter searches until the selected page number is located, so that the desired page is displayed on the screen.

- Press “P ^” button to move the Teletext screen forward one page at a time.
- Press “P ∨” button to move the Teletext screen backward one page at a time.

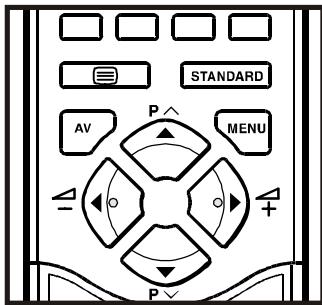

To Select Index Page

- To select the page number of the index (generally page 100), press “[i]” button.

Searching for a teletext page while watching TV

- In the Teletext mode pressing “[X]” button will switch the screen to the TV mode. In the TV mode enter a page number using digit buttons. As you enter last digit of page number, “[i]” sign will replace the page number and flash until the entered page number is found. Then the page number will replace “[i]” sign again. Now you can display this teletext page pressing “[X]” button.

To Select Double Height Text

- Press “[↑]” button for the top half of the information page to be displayed in double height text.
- Press “[↑]” button again for the bottom half of the information page to be displayed in double height text.
- Press “[↑]” button once more for the full page of normal height text.

To Reveal “concealed” Information

- Pressing “[?]” button once will reveal answers on a quiz or games page.
- Pressing “[?]” button again will conceal the revealed answers.

To Stop Automatic Page Change

The teletext page you have selected may contain more information than what is on the screen; the rest of the information will be displayed after a period of time.

- Press “[H]” button to stop the automatic page change.
- Press “[H]” button again to allow the next page to be displayed.

To Select a Subcode Page

Subcode pages are subsections of long Teletext pages that can only be displayed on the screen one section at a time.

- Select the required Teletext page.

- Press “[O]” button.

- Select the required subcode page number by pressing four digit buttons (e.g. 0001).

- If the selected subcode page is not displayed in a short time, press “[X]” button. TV programme will be displayed on the screen.

- Teletext page number will be displayed on the upper left corner of the screen when the selected page is found.

- Press “[X]” button to display the selected Teletext page.

To exit Teletext

- Press “[E]” button. The screen will switch to TV mode.

Fastext and Toptext

Teletext mode will be selected according to transmission automatically.

Your CTV supports the 8 page Teletext system. When the page number of any of the 8 pages in memory is entered, the system will not search for the requested page; instead it will display the page automatically.

- Press “P ^” button to move the Teletext screen forward one page at a time.
- Press “P ∨” button to move the Teletext screen backward one page at a time.

For Fastext and Toptext

The subject-heading for the information may have a particular colour or can be in a form located in a coloured box.

- Press an appropriate **RED, GREEN, YELLOW or BLUE** button in order to reach the relevant page quickly.

For TOPTEXT

If Toptext transmission is present, colour coded buttons will appear in status row.

If Toptext transmission is not present, status row will not appear.

In Toptext mode the “P ^” or “P ∨” commands will request the next or previous page respectively. If Toptext transmission is not available, in case of operation of these commands, wraparound occurs. For example page 100 appears to be one greater than page 199.

Connect the External Equipments

Before connecting anything

- Switch off all equipments including the TV.
- Read the manuals provided with the equipments.

To select an AV mode

Pressing "AV" button on the remote control selects one of four AV modes (**EXT 1**, **EXT 2**, **EXT 2 S** and **F AV**).

- To return to the **TV** mode, repeatedly press "AV" button.

EXT 1 terminal: Euroconnector (21-pin, SCART)




- Video input, Audio L/R inputs and RGB inputs are available.
- TV broadcast outputs (Video and Audio L/R) are available.

EXT 2 terminal: Euroconnector (21-pin, SCART)

- Video input, S-VIDEO (Y/C) input and Audio L/R inputs are available.
- Video and Audio L/R outputs are available. (see "**Setting External Source Output**" on page 7.)

F AV (Front AV) terminal: RCA connectors x 3

- Video input and Audio L/R inputs are available.

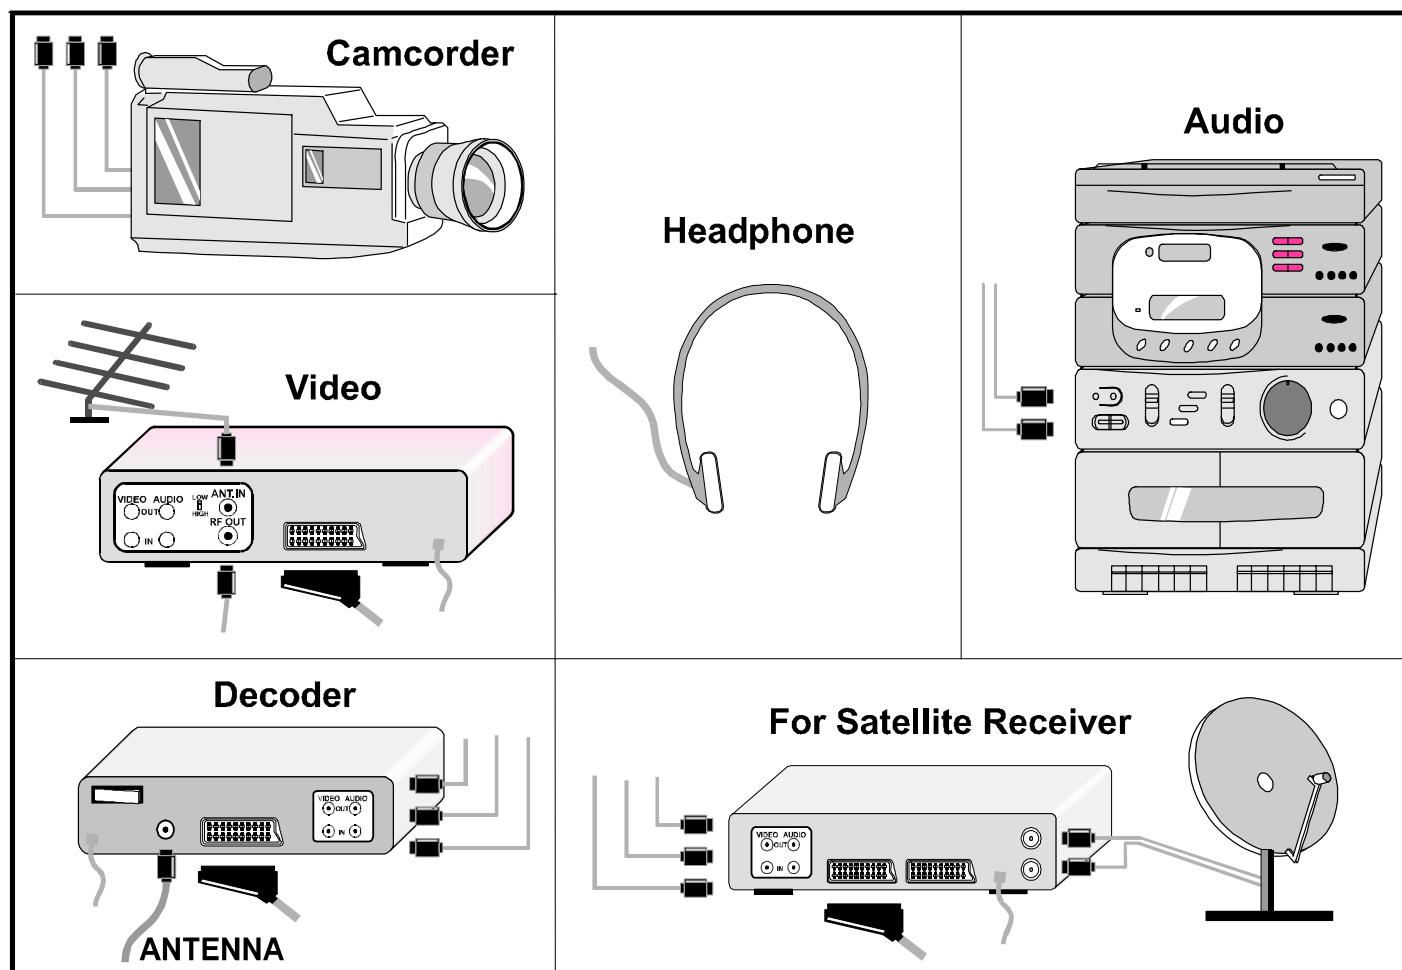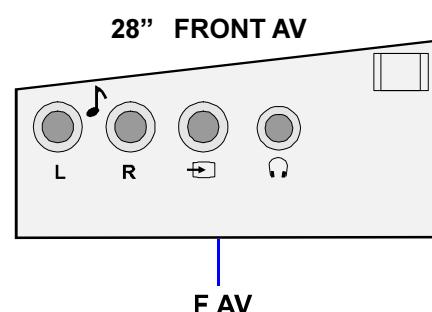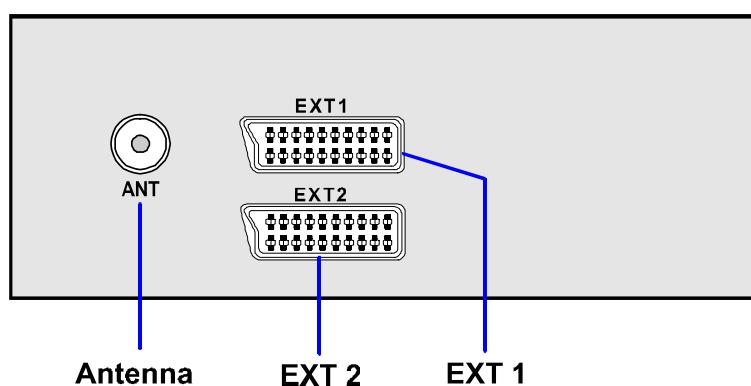

Via the Euroconnector

Your TV set has two Euroconnector sockets. If you want to connect equipments (e.g. video recorder, decoder, etc.) which have Euroconnectors, to your TV, use the **EXT 1** or **EXT 2** terminals.

EXT 2 S Mode

If the equipment connected to your TV set supports S-Video (Y/C) output from Euroconnector, you can have a better picture quality by selecting **EXT 2 S** mode and connecting your equipment to the **EXT 2** terminal of TV. See your equipment's booklet to check if your equipment has such feature.

Via the RCA jacks

If you have an equipment (such as a Camcorder) which has the RCA jacks, connect it to the **F AV (Front AV)** terminal with the video and audio cables.

- If the equipment has the mono audio jack, connect it to the **AUDIO-L** jack.

Via the ANT (aerial) socket

If your equipment does not have a Euroconnector or RCA jacks, connect it to the TV with an aerial cable. For details, see the manual provided with the equipment.

- To store the test signal that comes from the equipment in a programme number, follow the instructions of "**Tuning menu**" on page 8. The programme number 0 is usually used for the external equipment.
- After storing, you can watch images from the equipment by selecting the programme number which you stored the test signal.

TV and Video Recoder (VCR)

- Connect the Video Recoder to the ANT (antenna input) socket of the TV with the aerial cable.
- Connect the Video Recoder to the **EXT 1** or **EXT 2** terminal with the SCART cable, or connect it to the **F AV (Front AV)** terminal with the audio and video cables.
- When you watch a picture from your VCR and the picture is unstable, you may improve it by changing the "**Mode**" setting in the "**TUNING**" menu. (See the "**Tuning Menu**" on page 8.)

NTSC Playback

Connect a NTSC video recorder to a terminal. Then press "**AV**" button to select the corresponding AV mode.

NTSC 3.58/4.43 system is detected automatically in AV mode.

Copy Facility

You can output the video and audio signals which inputs from **TV**, **EXT 1**, **F AV (Front-AV)** terminal to the video recorder connected to the **EXT 2** terminal.

- To select the output source, see "**Setting External Source Output**" on page 7.

Connecting Headphones

Use the stereo headphone socket of your TV, to connect headphones. As soon as you connect your headphone to the headphone socket, TV's loudspeakers will automatically mute.

Tips

Care of the Screen

Clean the screen with a slightly damp, soft cloth. Do not use abrasive solvents as they may damage the TV screen coating layer.

Poor Picture

Have you selected the correct TV system? Is your TV set or house aerial located too close to the loudspeakers, non-earthed audio equipment or neon lights, etc.?

Mountains or high buildings can cause double pictures or ghost images. Sometimes you can improve the picture quality by changing the direction of the aerial.

The picture quality may degrade when two peripherals are connected to the TV at the same time. In such a case, disconnect one of the peripherals.

No Picture:

Is the aerial connected properly? Are the plugs connected tightly to the aerial socket? Is the aerial cable damaged? Are suitable plugs used to connect the aerial? If you are in doubt, consult your dealer.

No Picture means that your TV is not receiving any transmission. Have you pressed the correct buttons on the remote control? Try once more.

Sound:

Sound is coming from only one of the speakers. Is the balance set to one direction extreme? See **SOUND** menu.

Remote Control:

Your TV no longer responds to the remote control. Press the "**STANDARD**" button on the remote control once more. Perhaps the batteries are exhausted. If so you can still use the local buttons at the front of your TV.

Have you selected the wrong menu? Press "**STANDARD**" button to return to TV mode or press "**MENU**" button to return to the previous menu.

No solution:

Switch your TV set off and on. If this does not work, call the service personnel; never attempt to repair it yourself.

Specifications

TV BROADCASTING **PAL B/G**

RECEIVING CHANNELS VHF (BAND I/III)
UHF (BAND U)
HYPERBAND
CABLE TV (S01-S41 / S75-S79)

NUMBER OF PRESET CHANNELS 200

CHANNEL INDICATOR On Screen Display

RF AERIAL INPUT 75 Ohm (unbalanced)

OPERATING VOLTAGE **220-240V AC, 50 Hz.**

SOUND-MULTIPLEX SYSTEMS Nicam + German Stereo

PICTURE TUBE **For 28"**

AUDIO OUTPUT POWER

(W_{RMS}) (%10 THD) 2 x 12

POWER CONSUMPTION (W) (max.) 175

DIMENSIONS (mm) **AV28BH7ENB**

AV28BH7ENS

D 480

L 770

H 580

Weight (Kg.) 33,2

JVC

SERVICE MANUAL

COLOUR TELEVISION

**AV28BH7ENS, AV28BH7ENB
AV28BH7EPS, AV28BH7EPB
AV28BH7EES, AV28BH7EEB**

Supplementary

The updated version of the parts list attached to the SERVICE MANUAL (No.51967, Apr. 2002) for the AV28BH7ENS, AV28BH7ENB, AV28BH7EPS, AV28BH7EPB, AV28BH7EES and AV28BH7EEB has been issued.

Except for the parts list, please refer to the original SERVICE MANUAL (No.51967, Apr. 2002) for the AV28BH7ENS, AV28BH7ENB, AV28BH7EPS, AV28BH7EPB, AV28BH7EES and AV28BH7EEB.

PARTS LIST

CONTENTS

■ USING P.W. BOARD & REMOTE CONTROL UNIT	2
■ EXPLODED VIEW PARTS LIST	3
■ EXPLODED VIEW	4
■ PRINTED WIRING BOARD PARTS LIST	

[AV28BH7ENS , AV28BH7ENB]

● MAIN P.W. BOARD ASS'Y	5
● MULTI SOUND P.W. BOARD ASS'Y	8
● FEATURE BOX P.W. BOARD ASS'Y	9
● CRT SOCKET P.W. BOARD ASS'Y	11
● FRONT CONTROL P.W. BOARD ASS'Y	12
● FRONT AV + HEADPHONE JACK P.W. BOARD ASS'Y	12

[AV28BH7EPS , AV28BH7EPB]

● MAIN P.W. BOARD ASS'Y	13
-------------------------------	----

[AV28BH7EES , AV28BH7EEB]

● MAIN P.W. BOARD ASS'Y	17
■ PACKING / PACKING PARTS LIST	21

USING PW BOARD & REMOTE CONTROL UNIT

PWB ASS'Y	Model	AV28BH7ENS AV28BH7ENB	AV28BH7EPS AV28BH7EPB	AV28BH7EES AV28BH7EEB
MAIN PWB	VE-20105613	VE-20105616	VE-20105600	
MULTI SOUND PWB	VE-20085395	←	←	
FEATURE BOX PWB	VE-20055386	←	←	
CRT SOCKET PWB	VE-20086295	←	←	
FRONT CONTROL PWB	VE-20082481	←	←	
FRONT AV + HEADPHONE JACK PWB	VE-20083091	←	←	
REMOTE CONTROL UNIT	VE-30015781 (RM-C85)	←	←	

EXPLODED VIEW PARTS LIST


[Silver model : AV28BH7ENS, AV28BH7EPS, AV28BH7EES]

△ Ref.No.	Part No.	Part Name	Description
△ V01	VE-30002754	PICTURE TUBE(ITC)	Included DY, PC magnet
△ L01	VE-30002728	DEG.COIL & EARTH	
△ TR202	VE-30016922	FBT TRANSF.	Within MAIN PWB
△ 1	VE-20083491	BUTTON(ON/OFF SW)	POWER
2	VE-35004544	SPRING(ON/OFF SW)	
△ 3	VE-20069218	LENS	
△ 4	VE-20082289	FRONT CABINET	
△ 5	VE-20083502	BUTTON FUNCTION	CH, VOL
△ 6	VE-20086219	FRONT AV DOOR	
△ 7	VE-20003605	PIN(FRONT AV DOOR) (X2)	
△ 8	VE-40000026	EJECTOR	
△ 9	VE-20078776	LENS LED	
△ 10	VE-20004339	LENS PRE-AMP	
11	VE-30001946	SPEAKER(57x160mm) (X2)	
12	VE-30001947	TWEETER(CLOSED) (X2)	
△ 13	VE-20081578	BASE	
△ 14	VE-20069012	CHASSIS FRAME	
△ 15	VE-20104969	BACK COVER	
△ 16	VE-20087523	BACK DOOR	
17	VE-35004572	SCREW	(X8)
18	VE-35000211	SCREW	(X4)
19	VE-40009154	LOGO JVC	
△ 20	VE-30016513	POWER CORD	
△ 21	VE-20086449	LABEL	[AV28BH7ENS]
△ 21	VE-20086452	LABEL	[AV28BH7EPS]
△ 21	VE-20086455	LABEL	[AV28BH7EES]
△ 22	VE-30002174	ON/OFF SWITCH	

[Black model : AV28BT7ENB, AV28BT7EPB, AV28BT7EEB]

△ Ref.No.	Part No.	Part Name	Description
△ V01	VE-30002754	PICTURE TUBE(ITC)	Included DY, PC magnet
△ L01	VE-30002728	DEG.COIL & EARTH	
△ TR202	VE-30016922	FBT TRANSF.	Within MAIN PWB
△ 1	VE-20069016	BUTTON(ON/OFF SW)	POWER
2	VE-35004544	SPRING(ON/OFF SW)	
△ 3	VE-20069218	LENS	
△ 4	VE-20081489	FRONT CABINET	
△ 5	VE-20069014	BUTTON FUNCTION	CH, VOL
△ 6	VE-20086314	FRONT AV DOOR	
△ 7	VE-20003605	PIN(FRONT AV DOOR) (X2)	
△ 8	VE-40000026	EJECTOR	
△ 9	VE-20078776	LENS LED	
△ 10	VE-20004339	LENS PRE-AMP	
11	VE-30001946	SPEAKER(57x160mm) (X2)	
12	VE-30001947	TWEETER(CLOSED) (X2)	
△ 13	VE-20081578	BASE	
△ 14	VE-20069012	CHASSIS FRAME	
△ 15	VE-20069018	BACK COVER	
△ 16	VE-20040684	BACK DOOR	
17	VE-35004572	SCREW	(X8)
18	VE-35000211	SCREW	(X4)
19	VE-40009152	LOGO JVC	
△ 20	VE-30016513	POWER CORD	
△ 21	VE-20086400	LABEL	[AV28BT7ENB]
△ 21	VE-20086443	LABEL	[AV28BT7EPB]
△ 21	VE-20086446	LABEL	[AV28BT7EEB]
△ 22	VE-30002174	ON/OFF SWITCH	

EXPLODED VIEW

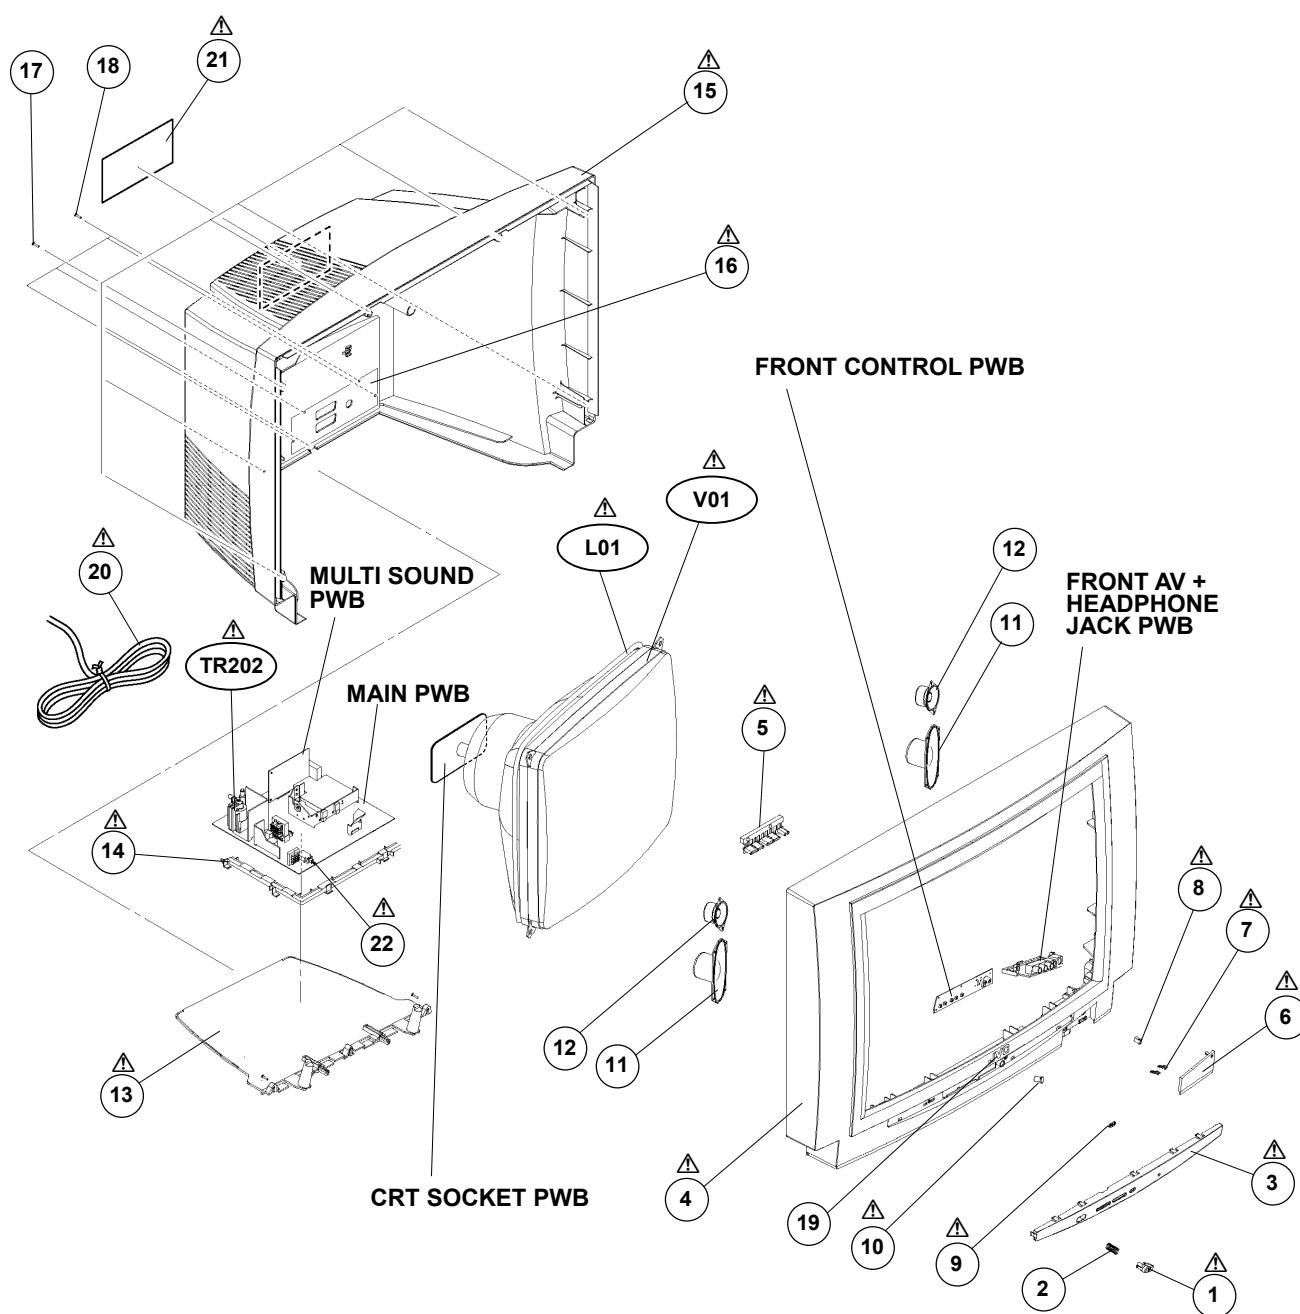

PRINTED WIRING BOARD PARTS LIST

[AV28BH7ENS , AV28BH7ENB]

MAIN P.W. BOARD ASS'Y (VE-20105613)

△	Symbol No.	Part No.	Part Name	Description	△	Symbol No.	Part No.	Part Name	Description
RESISTOR									
R101	VE-30000668	SMD R		1/10W 33K J	R256	VE-30001100	MO R		1W 150R J
R102	VE-30007782	MF R		1/4W 3.9M F	R260	VE-30000778	SMD R		1W 0.47R J
R103	VE-30000855	MF R		1/4W 1M F	R261	VE-30000778	SMD R		1/10W 6.8K J
R104	VE-30000668	SMD R		1/10W 33K J	R262	VE-30001237	FUSE R		1/10W 3.3R J
R105	VE-30000452	CF R		1/4W 10R J	R264	VE-30001077	MO R		1/2W 10R J
R106	VE-30000664	SMD R		1/10W 3.3K J	R270	VE-30000541	CF R		1/4W 1.5M J
R107	VE-30007019	SMD R		1/10W 10K J	R271	VE-30000744	CF R		1/4W 560R J
R108	VE-30007784	MO R		5W 33K 1(RADIAL)	R272	VE-30000475	SMD R		1/10W 47K J
R116	VE-30001171	MO R		2W 4.7K J	R280	VE-30000480	SMD R		1/10W 100K J
R117	VE-30001257	MG R		1/2W 4.7M J	R281	VE-30000469	SMD R		1/10W 1K J
R118	VE-30000936	FUSE R		1/2W 0.1R J	R319	VE-30000594	CF R		1/4W 22K J
R119	VE-30000936	FUSE R		1/2W 0.1R J	R323	VE-30000459	CF R		1/4W 100R J
R120	VE-30000814	SMD R		1/10W 820R J	R324	VE-30000464	SMD R		1/10W 100R J
R122	VE-30000469	SMD R		1/10W 1K J	R327	VE-30000464	SMD R		1/10W 100R J
R123	VE-30000469	SMD R		1/10W 1K J	R360	VE-30000659	SMD R		1/10W 330R J
R124	VE-30000480	SMD R		1/10W 100K J	R361	VE-30000659	SMD R		1/10W 330R J
R125	VE-30000927	MF R		1/4W 220K J	R362	VE-30000659	SMD R		1/10W 330R J
R126	VE-30000664	SMD R		1/10W 3.3K J	R363	VE-30000659	SMD R		1/10W 330R J
R127	VE-30000469	SMD R		1/10W 1K J	R364	VE-30000659	SMD R		1/10W 330R J
R128	VE-30000536	CF R		1/4W 150K J	R365	VE-30000659	SMD R		1/10W 330R J
R129	VE-30007019	SMD R		1/10W 10K F	R366	VE-30000659	SMD R		1/10W 330R J
R130	VE-30000721	SMD R		1/10W 4.7K J	R367	VE-30000659	SMD R		1/10W 330R J
R134	VE-30000469	SMD R		1/10W 1K J	R368	VE-30000659	SMD R		1/10W 330R J
R135	VE-30007790	SMD R		1/10W 4.3K F	R369	VE-30000659	SMD R		1/10W 330R J
R136	VE-30000774	SMD R		1/10W 680R J	R370	VE-30000659	SMD R		1/10W 330R J
R137	VE-30007021	SMD R		1/10W 1K F	R371	VE-30000659	SMD R		1/10W 330R J
R138	VE-30007786	SMD R		1/10W 2.55K F	R372	VE-30000659	SMD R		1/10W 330R J
R139	VE-30000774	SMD R		1/10W 680R J	R373	VE-30000659	SMD R		1/10W 330R J
R140	VE-30000459	CF R		1/4W 100R J	R374	VE-30000659	SMD R		1/10W 330R J
R141	VE-30000475	SMD R		1/10W 10K J	R375	VE-30000659	SMD R		1/10W 330R J
R142	VE-30000475	SMD R		1/10W 10K J	R376	VE-30000659	SMD R		1/10W 330R J
R143	VE-30007021	SMD R		1/10W 1K F	R378	VE-30000659	SMD R		1/10W 330R J
R144	VE-30007788	SMD R		1/10W 2.7K F	R379	VE-30000659	SMD R		1/10W 330R J
R145	VE-30000732	SMD R		1/10W 470K J	R380	VE-30000659	SMD R		1/10W 330R J
R146	VE-30000469	FUSE R		1/10W 1K J	R381	VE-30000659	SMD R		1/10W 330R J
R148	VE-30014023	FUSE R		1/2W 0.1R J VISHAY	R382	VE-30000659	SMD R		1/10W 330R J
R149	VE-30007204	FUSE R		1/2W 0.1R J VISHAY	R383	VE-30000659	SMD R		1/10W 330R J
R150	VE-30007783	FUSE R		1/2W 0.1R J VISHAY	R384	VE-30000659	SMD R		1/10W 330R J
R151	VE-30014023	FUSE R		1/2W 0.1R J VISHAY	R385	VE-30000659	SMD R		1/10W 330R J
R152	VE-30000659	SMD R		1/10W 330R J	R387	VE-30000659	SMD R		1/10W 330R J
R153	VE-30012649	SMD R		1/16W 150R J	R397	VE-30000659	SMD R		1/10W 330R J
R154	VE-30012984	SMD R		1/16W 91R J	R398	VE-30000659	SMD R		1/10W 330R J
R155	VE-30000712	CF R		1/4W 470R J	R490	VE-30000466	CF R		1/4W 1K J
R156	VE-30001089	MO R		2W 1R J	R492	VE-30000503	SMD R		1/10W 12K J
R157	VE-30000534	SMD R		1/10W 15K J	R506	VE-30012695	SMD R		1/16W 470R J
R158	VE-30000475	SMD R		1/10W 10K J	R509	VE-30000797	SMD R		1/10W 75R J
R159	VE-30000480	SMD R		1/10W 100K J	R510	VE-30007021	SMD R		1/10W 1K F
R160	VE-30006923	SMD R		1/10W 4.3K J	R511	VE-30000464	SMD R		1/10W 100R J
R202	VE-30007779	MO R		5W 47R J (RADIAL)	R512	VE-30000464	SMD R		1/10W 100R J
R203	VE-30000631	SMD R		1/10W 2.7K J	R513	VE-30000457	SMD R		1/10W 10R J
R205	VE-30017136	MO R		1W 0.56R J	R518	VE-30000735	SMD R		1/10W 4.7R J
R206	VE-30001080	MO R		2W 100R J	R801	VE-30000718	CF R		1/4W 4.7K J
R210	VE-30000583	CF R		1/4W 220R J	R802	VE-30000718	CF R		1/4W 4.7K J
R211	VE-30000721	SMD R		1/10W 4.7K J	R803	VE-30000628	CF R		1/4W 2.7K J
R212	VE-30000593	SMD R		1/10W 2.2K J	R804	VE-30000475	SMD R		1/10W 10K J
R213	VE-30000593	SMD R		1/10W 2.2K J	R805	VE-30000534	SMD R		1/10W 15K J
R214	VE-30000593	SMD R		1/10W 2.2K J	R806	VE-30000531	CF R		1/4W 15K J
R215	VE-30000721	SMD R		1/10W 4.7K J	R807	VE-30000567	SMD R		1/10W 18K J
R216	VE-30000631	SMD R		1/10W 2.7K J	R808	VE-30000734	CF R		1/4W 4.7K J
R217	VE-30000593	SMD R		1/10W 2.2K J	R809	VE-30000717	SMD R		1/10W 470R J
R218	VE-30000480	SMD R		1/10W 100K J	R810	VE-30000564	CF R		1/4W 18K J
R220	VE-30000590	CF R		1/4W 2.2K J	R811	VE-30000717	SMD R		1/10W 470R J
R225	VE-30001086	MO R		2W 10K J	R812	VE-30000734	CF R		1/4W 4.7R J
R226	VE-30001168	MO R		2W 470R J	R813	VE-30000475	SMD R		1/10W 10K J
R227	VE-30000469	SMD R		1/10W 1K J	R818	VE-30000734	CF R		1/4W 4.7R J
R228	VE-30000475	SMD R		1/10W 10K J	R820	VE-30000734	CF R		1/4W 4.7R J
R229	VE-30000727	SMD R		1/10W 47K J	R900	VE-30012641	SMD R		1/16W 10K J
R230	VE-30000902	MF R		1/4W 1.8K F	R901	VE-30012641	SMD R		1/16W 10K J
R231	VE-30001229	FUSE R		1W 2.2R J	R902	VE-30012641	SMD R		1/16W 10K J
R232	VE-30001027	MF R		1/4W 82K J	R903	VE-30000718	CF R		1/4W 4.7K J
R233	VE-30001244	FUSE R		1/2W 0.47R J	R904	VE-30000718	CF R		1/4W 4.7R J
R234	VE-30000936	FUSE R		1/2W 0.1R J	R905	VE-30000723	CF R		1/4W 47K J
R235	VE-30000668	SMD R		1/10W 33K J	R906	VE-30012696	SMD R		1/16W 47K J
R236	VE-30000718	CF R		1/4W 4.7K J	R907	VE-30012679	SMD R		1/16W 3.9K J
R237	VE-30001244	FUSE R		1/2W 0.47R J	R908	VE-30012679	SMD R		1/16W 3.9K J
R238	VE-30000729	CF R		1/4W 470K J	R909	VE-30000531	CF R		1/4W 15K J
R239	VE-30001215	FUSE R		1W 1R J	R910	VE-30000531	CF R		1/4W 15K J
R240	VE-30000469	SMD R		1/10W 1K J	R911	VE-30012641	SMD R		1/16W 10K J
R241	VE-30000818	SMD R		1/10W 8.2K J	R912	VE-30000471	CF R		1/4W 10K J
R245	VE-30000784	CF R		1/4W 680K J	R913	VE-30012641	SMD R		1/16W 10K J
R245	VE-30000466	CF R		1/4W 1K J	R914	VE-30000471	CF R		1/4W 10K J
R246	VE-30001027	MF R		1/4W 82K J	R915	VE-30000471	CF R		1/4W 10K J
R250	VE-30000477	CF R		1/4W 100K J	R916	VE-30012695	SMD R		1/4W 10K J
R251	VE-30000477	CF R		1/4W 100K J	R917	VE-30012687	SMD R		1/16W 56R J
R252	VE-30000789	SMD R		1/10W 27K J	R918	VE-30012692	SMD R		1/16W 4.7K J
R254	VE-30000636	SMD R		2W 2.2R J	R919	VE-30012657	SMD R		1/16W 1K J

[AV28BH7ENS , AV28BH7ENB]

△	Symbol No.	Part No.	Part Name	Description
RESISTOR				
R920	VE-30012657	SMD R	1/16W 1K J	
R921	VE-30012657	SMD R	1/16W 1K J	
R922	VE-30012657	SMD R	1/16W 1K J	
R923	VE-30012657	SMD R	1/16W 1K J	
R924	VE-30012696	SMD R	1/16W 47K J	
R925	VE-30012696	SMD R	1/16W 47K J	
R926	VE-30012696	SMD R	1/16W 47K J	
R927	VE-30012696	SMD R	1/16W 47K J	
R928	VE-30012510	SMD R	1/16W 100R J	
R929	VE-30012510	SMD R	1/16W 100R J	
R930	VE-30012641	SMD R	1/16W 10K J	
R931	VE-30012641	SMD R	1/16W 10K J	
R932	VE-30012641	SMD R	1/16W 10K J	
R933	VE-30000718	CF R	1/4W 4.7K J	
R934	VE-30012692	SMD R	1/16W 4.7K J	
R935	VE-30012662	SMD R	1/16W 2.7K J	
R936	VE-30000718	CF R	1/4W 4.7K J	
R937	VE-30000459	CF R	1/4W 100R J	
R938	VE-30012509	SMD R	1/16W 100K J	
R939	VE-30012692	SMD R	1/16W 4.7K J	
R940	VE-30000500	CF R	1/4W 12K J	
R941	VE-30000588	SMD R	1/10W 220R J	
R942	VE-30000588	SMD R	1/10W 220R J	
R943	VE-30000471	CF R	1/4W 10K J	
R944	VE-30012641	SMD R	1/16W 10K J	
R945	VE-30000471	CF R	1/4W 10K J	
R946	VE-30012557	SMD R	1/16W 1K J	
R950	VE-30012657	SMD R	1/16W 1K J	
R951	VE-30012657	SMD R	1/16W 1K J	
R952	VE-30012657	SMD R	1/16W 1K J	
R953	VE-30000466	CF R	1/4W 1K J	
R955	VE-30012657	SMD R	1/16W 100R J	
R956	VE-30012510	SMD R	1/16W 100R J	
R957	VE-30012655	SMD R	1/16W 180R J	
R958	VE-30014022	SMD R	1/16W 47R J	
R959	VE-30000466	CF R	1/4W 1K J	
R960	VE-30000471	CF R	1/4W 10K J	
R961	VE-30000718	CF R	1/4W 4.7K J	
R964	VE-30012641	SMD R	1/16W 10K J	
R965	VE-30012657	SMD R	1/16W 1K J	
R966	VE-30012641	SMD R	1/16W 10K J	
R967	VE-30012650	SMD R	1/16W 15K J	
R968	VE-30000692	SMD R	1/10W 3.9K J	
S133	VE-30000575	SMD R	1/10W 2K J	
VR127	VE-30001041	ADJ.R	1/6W 1K M VER	

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C100	VE-30000098	MKT CAP.	3.3NF 63V J	
C101	VE-30000371	EL CAP.	22UF 50V M	
C102	VE-30000294	SMD CAP.	100NF 50V K	
C103	VE-30000294	SMD CAP.	100NF 50V K	
C104	VE-30012323	MKT CAP.	1NF 100V J	
C105	VE-30000384	SMD CAP.	1NF 50V K R	
C106	VE-30000332	SMD CAP.	4.7NF 50V K	
C107	VE-30000263	SMD CAP.	56PF 50V J CH	
C108	VE-30000123	PP CAP.	33NF 630V K	
C109	VE-30000159	MKP CAP.	4.7NF 1.6KV J	
C110	VE-30009308	CER CAP.	470PF 1KV K (PULSE)	
C111	VE-30000131	MKP CAP.	100NF 250V J	
△ C112	VE-30000094	MKT CAP.	220NF AC275V M	
C114	VE-30000353	EL CAP.	100UF 25V M	
△ C115	VE-30007858	MKT CAP.	470NF AC275V M	
C118	VE-30007755	MKT CAP.	680NF AC275V M	
C119	VE-30007754	MKP CAP.	1UF 400V	
C120	VE-30007753	MKP CAP.	1NF 1KV	
△ C122	VE-30001369	EL CAP.	220UF 450V M 105°	
C123	VE-30000447	CER CAP.	4.7NF 4KV M E	
C124	VE-30000315	SMD CAP.	220NF 25V Z	
C125	VE-30000315	SMD CAP.	220NF 25V Z	
C130	VE-30007708	CER CAP.	1NF 1KV K (PULSE)	
C131	VE-30006909	EL CAP.	100UF M 250V	
C133	VE-300007750	EL CAP.	470UF 35V (H/R 1150MA)	
C133	VE-30000409	EL CAP.	470UF 25V M	
C134	VE-30007750	EL CAP.	470UF 35V (H/R 1150MA)	
C135	VE-300007748	EL CAP.	1000UF 35V M	
C136	VE-300007748	EL CAP.	1000UF 35V M	
C137	VE-30000284	SMD CAP.	1NF 50V K R	
C138	VE-30000224	SMD CAP.	220PF 50V J	
C139	VE-30000284	SMD CAP.	1NF 50V K R	
C140	VE-30000360	EL CAP.	1000UF 25V M	
C141	VE-30000352	EL CAP.	100UF 16V M	
C142	VE-30000294	SMD CAP.	100NF 50V K	
C143	VE-30000294	SMD CAP.	100NF 50V K	
C144	VE-30000352	EL CAP.	100UF 16V M	
C145	VE-30000309	SMD CAP.	2.2NF 50V K R	
C146	VE-30000359	EL CAP.	1000UF 16V M	
C147	VE-30000359	EL CAP.	1000UF 16V M	
		C148	VE-30000294	SMD CAP.
		C149	VE-30000294	SMD CAP.
		C150	VE-30000352	EL CAP.
		C151	VE-30000284	SMD CAP.
		C160	VE-30007081	EL CAP.
		C161	VE-30007308	CER CAP.
		C162	VE-30007308	CER CAP.
		C163	VE-30009208	CER CAP.
		C165	VE-30016654	SMD CAP.
		C166	VE-30000355	EL CAP.
		C167	VE-30009208	CER CAP.
		C168	VE-30000294	SMD CAP.
		C170	VE-30000352	EL CAP.
		C171	VE-30000352	EL CAP.
		C172	VE-30016654	SMD CAP.
		C173	VE-30000315	SMD CAP.
		C201	VE-30000400	EL CAP.
		C202	VE-30000106	MKT CAP.
		C203	VE-30000099	MKT CAP.
		C204	VE-30000345	EL CAP.
		C206	VE-30000315	SMD CAP.
		C207	VE-30000362	EL CAP.
		C208	VE-30000415	EL CAP.
		C209	VE-30000224	SMD CAP.
		C210	VE-30000149	MKT CAP.
△ C211	VE-30000179	MKT CAP.	2.7NF 2KV 3.5	
C212	VE-30000137	MKT CAP.	15NF 630V J	
△ C213	VE-30007215	MKT CAP.	1.2UF 250V J	
C214	VE-30000415	EL CAP.	4.7UF 250V M	
C215	VE-30000167	MKT CAP.	560NF 250V J	
		C216	VE-30000406	EL CAP.
		C222	VE-30000431	CER CAP.
		C223	VE-30000351	EL CAP.
		C225	VE-30000359	EL CAP.
		C226	VE-30000356	EL CAP.
		C228	VE-30000360	EL CAP.
		C233	VE-30000223	CER CAP.
		C240	VE-30000354	EL CAP.
		C250	VE-30000304	SMD CAP.
		C251	VE-30000359	EL CAP.
		C252	VE-30000289	SMD CAP.
		C253	VE-30000294	SMD CAP.
		C254	VE-30000360	EL CAP.
		C255	VE-30000294	SMD CAP.
		C256	VE-30000078	MKT CAP.
		C257	VE-30000304	SMD CAP.
		C258	VE-30000322	SMD CAP.
		C305	VE-30000294	SMD CAP.
		C313	VE-30000189	SMD CAP.
		C321	VE-30000352	EL CAP.
		C322	VE-30000352	EL CAP.
		C324	VE-30000294	SMD CAP.
		C333	VE-30000294	SMD CAP.
		C402	VE-30000345	EL CAP.
		C403	VE-30000384	EL CAP.
		C404	VE-30000284	SMD CAP.
		C405	VE-30000284	SMD CAP.
		C406	VE-30000224	SMD CAP.
		C407	VE-30000312	SMD CAP.
		C408	VE-30000371	EL CAP.
		C409	VE-30000294	SMD CAP.
		C410	VE-30000294	SMD CAP.
		C411	VE-30000109	MKT CAP.
		C412	VE-30000384	EL CAP.
		C413	VE-30000294	SMD CAP.
		C414	VE-30000294	SMD CAP.
		C417	VE-30000294	SMD CAP.
		C418	VE-30000294	SMD CAP.
		C419	VE-30000294	SMD CAP.
		C427	VE-30000294	SMD CAP.
		C428	VE-30000355	SMD CAP.
		C440	VE-30000400	EL CAP.
		C441	VE-30000220	SMD CAP.
		C442	VE-30000294	SMD CAP.
		C443	VE-30013411	SMD CAP.
		C450	VE-30000345	EL CAP.
		C451	VE-30000294	SMD CAP.
		C453	VE-30000355	EL CAP.
		C454	VE-30000294	SMD CAP.
		C455	VE-30000345	EL CAP.
		C456	VE-30000352	EL CAP.
		C457	VE-30000294	SMD CAP.
		C468	VE-30000294	SMD CAP.
		C478	VE-30000294	SMD CAP.
		C492	VE-30000294	SMD CAP.
		C497	VE-30000294	SMD CAP.
		C498	VE-30000294	SMD CAP.
		C499	VE-30000362	EL CAP.
		C500	VE-30000352	EL CAP.
		C505	VE-30000294	SMD CAP.

[AV28BH7ENS , AV28BH7ENB]

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C506	VE-30000345	EL CAP.	10UF 50V M	
C509	VE-30000186	SMD CAP.	10PF 50V D COG	
C510	VE-30000186	SMD CAP.	10PF 50V D COG	
C511	VE-30000341	SMD CAP.	68NF 50V K	
C610	VE-30000074	MKT CAP.	100NF 63V J	
C801	VE-30000362	EL CAP.	1UF 50V M	
C802	VE-30000362	EL CAP.	1UF 50V M	
C804	VE-30000409	EL CAP.	470UF 25V M	
C805	VE-30000294	SMD CAP.	100NF 50V K	
C806	VE-30000409	EL CAP.	470UF 25V M	
C807	VE-30000294	SMD CAP.	100NF 50V K	
C808	VE-30000074	MKT CAP.	100NF 63V J	
C809	VE-30000074	MKT CAP.	100NF 63V J	
C819	VE-30000284	SMD CAP.	1NF 50V K R	
C820	VE-30000284	SMD CAP.	1NF 50V K R	
C821	VE-30000309	SMD CAP.	2.2NF 50V K R	
C822	VE-30000309	SMD CAP.	2.2NF 50V K R	
C823	VE-30000345	EL CAP.	10UF 50V M	
C900	VE-30000371	EL CAP.	22UF 50V M	
C901	VE-30016654	SMD CAP.	100NF 16V K R	
C902	VE-30016654	SMD CAP.	100NF 16V K R	
C903	VE-30016654	SMD CAP.	100NF 16V K R	
C904	VE-30000074	MKT CAP.	100NF 63V J	
C905	VE-30000371	EL CAP.	22UF 50V M	
C906	VE-30016654	SMD CAP.	100NF 16V K R	
C907	VE-30000074	MKT CAP.	100NF 63V J	
C908	VE-30016654	SMD CAP.	100NF 16V K R	
C909	VE-30016654	SMD CAP.	100NF 16V K R	
C910	VE-30016654	SMD CAP.	100NF 16V K R	
C911	VE-30000352	EL CAP.	100UF 16V M	
C912	VE-30012569	SMD CAP.	33PF 50V J	
C913	VE-30012569	SMD CAP.	33PF 50V J	
C914	VE-30000371	EL CAP.	22UF 50V M	
C915	VE-30016654	SMD CAP.	100NF 16V K R	
C916	VE-30016654	SMD CAP.	100NF 16V K R	
C917	VE-30016654	SMD CAP.	100NF 16V K R	
C918	VE-30016654	SMD CAP.	100NF 16V K R	
C919	VE-30000375	EL CAP.	220UF 16V M	
C920	VE-30000384	EL CAP.	2.2UF 50V M	
C921	VE-30016654	SMD CAP.	100NF 16V K R	
C925	VE-30016654	SMD CAP.	100NF 16V K R	
C927	VE-30016654	SMD CAP.	100NF 16V K R	
C930	VE-30000345	EL CAP.	10UF 50V M	
C931	VE-30000243	CER CAP.	330PF 50V J CH	
C932	VE-30016654	SMD CAP.	100NF 16V K R	
C933	VE-30000294	SMD CAP.	100NF 50V K	

TRANSF

△ TR101	VE-30016819	SMP3 TRANSF.
TR201	VE-30006743	HORIZONTAL DRIVER TRANSF.
△ TR202	VE-30016922	FB TRANSF.

COIL

L102	VE-30007775	PFC COIL	1MH 1KHZ 2A
L201	VE-30007771	FIXED COIL	100UH
L202	VE-30007757	EW INJECTION COIL	6MHz
L203	VE-30007770	FILTER COIL	1MHz
L204	VE-30012271	LINEARITY COIL	4.3UH
L205	VE-30007756	BRIDGE COIL	150UH 32KHZ
L304	VE-30001992	FIXED COIL	10UH
L401	VE-30001986	FIXED COIL	3.3UH
L403	VE-30001979	FIXED COIL	1UH
L405	VE-30001987	FIXED COIL	4.7UH
L420	VE-30001996	FIXED COIL	22UH
L421	VE-30001992	FIXED COIL	10UH
L422	VE-30001994	FIXED COIL	22UH J AXIAL
L423	VE-30001994	FIXED COIL	22UH J AXIAL
L427	VE-30001987	FIXED COIL	4.7UH
L428	VE-30001987	FIXED COIL	4.7UH
L429	VE-30001987	FIXED COIL	4.7UH
L430	VE-30001987	FIXED COIL	4.7UH
L900	VE-30001992	FIXED COIL	10UH
L901	VE-30001992	FIXED COIL	10UH
L902	VE-30001993	FIXED COIL	10UH
L903	VE-30001993	FIXED COIL	10UH
L904	VE-30001987	FIXED COIL	4.7UH
V1401	VE-30002037	VIF ADJ COIL	38.9MHZ

DIODE

D101	VE-30001285	SMD DIODE	
D102	VE-30001291	DIODE	1A/800V 30A
D103	VE-30007768	DIODE	5A/600V 55A
D104	VE-30007768	DIODE	5A/600V 55A

△	Symbol No.	Part No.	Part Name	Description
DIODE				
D105	VE-30007768	DIODE	5A/600V 55A	
D106	VE-30007758	BRIDGE DIODE	4A/1000V 150A	
D108	VE-30001318	DIODE	1A/800V 20A	
D109	VE-30009699	SMD ZENER DIODE	12V	
D110	VE-30001301	DIODE	2.3A/800V 45-150A	
D111	VE-30001299	DIODE	3A/400V 150A	
D112	VE-30001302	DIODE	8A/200V 80A	
D113	VE-30001302	DIODE	8A/200V 80A	
D114	VE-30001302	DIODE	8A/200V 80A	
D115	VE-30001285	SMD DIODE		
D116	VE-30007760	SMD ZENER DIODE		
D117	VE-30001285	SMD DIODE		
D118	VE-30007760	SMD ZENER DIODE		
D119	VE-30001284	DIODE	0.15A/100V 0.5A	
D120	VE-30001291	DIODE	0.1A/800V 30A	
D121	VE-30001318	DIODE	1A/800V 20A	
D123	VE-30001318	DIODE	1A/800V 20A	
D125	VE-30001285	SMD DIODE		
D126	VE-30001284	DIODE	0.15A/100V 0.5A	
D127	VE-30001284	DIODE	0.15A/100V 0.5A	
D128	VE-30001284	DIODE	0.15A/100V 0.5A	
D201	VE-30001291	DIODE	1A/800V 30A	
D202	VE-30001285	SMD DIODE		
D203	VE-30007760	SMD ZENER DIODE		
D205	VE-30007763	SMD ZENER DIODE		
D206	VE-30007768	DIODE	6A/1500V 100A	
D207	VE-30007768	DIODE	5A/600V 55A	
D208	VE-30001291	DIODE	1A/800V 30A	
D209	VE-30001291	DIODE	1A/800V 30A	
D210	VE-30001299	DIODE	3A/100V 150A	
D211	VE-30001299	DIODE	3A/400V 150A	
D212	VE-30001291	DIODE	1A/800V 30A	
D213	VE-30001291	DIODE	1A/800V 30A	
D214	VE-30007763	SMD ZENER DIODE		
D215	VE-30007762	SMD ZENER DIODE		
D216	VE-30001285	SMD DIODE		
D218	VE-30001291	DIODE	1A/800V 30A	
D219	VE-30001291	DIODE	1A/800V 30A	
D220	VE-30001284	DIODE	0.15A/100V 0.5A	
D221	VE-30001284	DIODE	0.15A/100V 0.5A	
D222	VE-30001284	DIODE	0.15A/100V 0.5A	
D223	VE-30001285	SMD DIODE		
D224	VE-30001285	SMD DIODE		
D225	VE-30001318	DIODE	1A/800V 20A	
D226	VE-30007760	SMD ZENER DIODE		
D227	VE-30001273	7RD ZENER DIODE		10V
D403	VE-30001285	SMD DIODE		
D900	VE-30012412	SMD ZENER DIODE		2.4V

TRANSISTOR

Q101	VE-30007801	TRANSISTOR	
Q103	VE-30007802	TRANSISTOR	
Q104	VE-30007798	SMD TRANSISTOR	
Q105	VE-30007798	SMD TRANSISTOR	
Q106	VE-30007802	TRANSISTOR	
Q107	VE-30007798	SMD TRANSISTOR	
Q108	VE-30007798	SMD TRANSISTOR	
Q109	VE-30001457	SMD TRANSISTOR	
Q110	VE-30001457	SMD TRANSISTOR	
Q112	VE-30001454	TRANSISTOR	
Q113	VE-30001428	TRANSISTOR	
Q201	VE-30007802	TRANSISTOR	
Q502	VE-30016686	TRANSISTOR	H.OUT
Q203	VE-30001458	SMD TRANSISTOR	
Q204	VE-30001458	SMD TRANSISTOR	
Q205	VE-30007799	TRANSISTOR	
Q507	VE-30001457	SMD TRANSISTOR	
Q208	VE-30001455	TRANSISTOR	
Q403	VE-30001457	SMD TRANSISTOR	
Q408	VE-30007800	TRANSISTOR	
Q415	VE-30001457	SMD TRANSISTOR	
Q801	VE-30001457	SMD TRANSISTOR	
Q802	VE-30001457	SMD TRANSISTOR	
Q900	VE-30001458	SMD TRANSISTOR	
Q901	VE-30001457	SMD TRANSISTOR	
Q902	VE-30001457	SMD TRANSISTOR	
Q903	VE-30001457	SMD TRANSISTOR	
Q904	VE-30001457	SMD TRANSISTOR	
Q905	VE-30001457	SMD TRANSISTOR	
Q906	VE-30001457	SMD TRANSISTOR	
Q907	VE-30001457	SMD TRANSISTOR	
Q908	VE-30001457	SMD TRANSISTOR	
Q909	VE-30001458	SMD TRANSISTOR	
Q910	VE-30001457	SMD TRANSISTOR	
Q911	VE-30001457	SMD TRANSISTOR	

[AV28BH7ENS , AV28BH7ENB]

△	Symbol No.	Part No.	Part Name	Description
IC				
△	IC101	VE-30007442	I.C.	
△	IC102	VE-30015087	I.C.	
	IC103	VE-30001506	I.C.	
	IC104	VE-30007444	I.C.	
	IC105	VE-30001500	I.C.	
	IC106	VE-30001568	I.C.	
	IC201	VE-30007793	I.C.	
	IC202	VE-30001506	I.C.	
	IC302	VE-20105601	I.C. (MEMORY)	24C32 056J1111261112
	IC304	VE-20117589	I.C. (MICOM)	PR.IC.41-AK41J G055
	IC401	VE-30001495	I.C.	
	IC802	VE-30007794	I.C.	
	IC900	VE-30013571	I.C.	

OTHERS

△	Symbol No.	Part No.	Part Name	Description
△	F101	VE-30001732	FUSE	3.15A
△	F102	VE-30009037	FUSE	6.3A
△	F103	VE-30009037	FUSE	6.3A
	J412	VE-30001265	NTC MONITOR	10R/3A
	L101	VE-30006712	FERRITE BEAD	
△	L103	VE-30006744	LINE FILTER	
△	L104	VE-30006744	LINE FILTER	
	L106	VE-30006712	FERRITE BEAD	
	L107	VE-30001960	FERRITE CORE	
	L108	VE-30001960	FERRITE CORE	
	L109	VE-30001960	FERRITE CORE	
	L206	VE-30006712	FERRITE BEAD	
	L207	VE-30006712	FERRITE BEAD	
	L425	VE-30001971	SMD FERRITE	
	L801	VE-30002170	FERRITE CORE	
	L803	VE-30002170	FERRITE CORE	
△	R109	VE-30001270	PTC	9 OHM
	R12	VE-30002183	RELAY	
	T401	VE-30001724	SER. FILTER	5.5MHZ
	TU401	VE-30009537	TUNER	
	X900	VE-30006662	XTAL	6MHZ
	Z401	VE-30001706	SAW FILTER	
	Z403	VE-30001692	SAW FILTER	

MULTI SOUND P.W. BOARD ASS'Y (VE-20085395)

△	Symbol No.	Part No.	Part Name	Description
RESISTOR				
	R501	VE-30000475	SMD R	1/10W 10K J
	R502	VE-30000475	SMD R	1/10W 10K J
	R503	VE-30000459	CF R	1/4W 100R J
	R504	VE-30000459	CF R	1/4W 100R J
	R505	VE-30000464	SMD R	1/10W 100R J
	R506	VE-30000721	SMD R	1/10W 4.7K J
	R507	VE-30000626	SMD R	1/10W 270R J
	R508	VE-30000464	SMD R	1/10W 100R J
	R509	VE-30000464	SMD R	1/10W 100R J
	R510	VE-30000464	SMD R	1/10W 100R J
	R511	VE-30000464	SMD R	1/10W 100R J
	R512	VE-30000469	SMD R	1/10W 1K J
	R513	VE-30000466	CF R	1/4W 1K J
	R514	VE-30000469	SMD R	1/10W 1K J
	R515	VE-30000469	SMD R	1/10W 100R J
	R516	VE-30000469	SMD R	1/10W 1K J
	R517	VE-30000469	SMD R	1/10W 1K J
	R518	VE-30000469	SMD R	1/10W 1K J
	R519	VE-30000469	SMD R	1/10W 1K J
	R520	VE-30000469	SMD R	1/10W 1K J
	R521	VE-30000469	SMD R	1/10W 1K J
	R522	VE-30000469	SMD R	1/10W 1K J
	R523	VE-30000469	SMD R	1/10W 1K J
	R524	VE-30000797	SMD R	1/10W 75R J
	R525	VE-30000797	SMD R	1/10W 75R J
	R526	VE-30000797	SMD R	1/10W 75R J
	R527	VE-30000459	CF R	1/4W 100R J
	R528	VE-30000459	CF R	1/4W 100R J
	R529	VE-30000459	CF R	1/4W 100R J
	R530	VE-30000459	CF R	1/4W 100R J
	R531	VE-30000459	CF R	1/4W 100R J
	R532	VE-30000459	CF R	1/4W 100R J
	R533	VE-30000459	CF R	1/4W 100R J
	R534	VE-30000459	FUSE R	1/4W 10R J
	R535	VE-30001207	FUSE R	1/4W 10R J
	R536	VE-30000797	SMD R	1/10W 75R J
	R538	VE-30000457	SMD R	1/10W 10R J
	R539	VE-30000452	CF R	1/4W 10R J
	R540	VE-30000457	SMD R	1/10W 10R J
	R541	VE-30000717	SMD R	1/10W 470R J

△	Symbol No.	Part No.	Part Name	Description
RESISTOR				
	R542	VE-30000475	SMD R	1/10W 10K J
	R543	VE-30000721	SMD R	1/10W 4.7K J
	R544	VE-30000717	SMD R	1/10W 470R J
	R545	VE-30000475	SMD R	1/10W 10K J
	R546	VE-30000712	CF R	1/4W 470R J
	R547	VE-30000475	SMD R	1/10W 10K J
	R548	VE-30000717	SMD R	1/10W 470R J
	R549	VE-30000475	SMD R	1/10W 10K J
	R550	VE-30000721	SMD R	1/10W 4.7K J
	R551	VE-30000721	SMD R	1/10W 4.7K J
	R552	VE-30000452	CF R	1/4W 10R J
	R553	VE-30000721	SMD R	1/10W 4.7K J
	R555	VE-30000797	CF R	1/4W 75R J
	R556	VE-30000792	CF R	1/4W 75R J
	R557	VE-30000792	CF R	1/4W 75R J
	R558	VE-30000792	CF R	1/4W 75R J
	R559	VE-30000457	SMD R	1/10W 10R J
	R560	VE-30000717	SMD R	1/10W 470R J
	R561	VE-30000475	SMD R	1/10W 10K J
	R562	VE-30000721	SMD R	1/10W 4.7K J
	R563	VE-30000792	CF R	1/4W 75R J
	R572	VE-30000721	SMD R	1/10W 4.7K J
	R573	VE-30000721	SMD R	1/10W 4.7K J
	R574	VE-30000721	SMD R	1/10W 4.7K J
	R575	VE-30000721	SMD R	1/10W 4.7K J
	R576	VE-30000797	SMD R	1/10W 100K J
	R577	VE-30000480	SMD R	1/10W 100K J
	R578	VE-30000480	SMD R	1/10W 100K J
	R579	VE-30000797	SMD R	1/10W 75R J
	R580	VE-30000588	SMD R	1/10W 220R J
	R581	VE-30000588	SMD R	1/10W 220R J
	R582	VE-30000583	CF R	1/4W 220R J
	R583	VE-30000503	SMD R	1/10W 12K J
	R584	VE-30000636	SMD R	1/10W 27K J
	R585	VE-30000503	SMD R	1/10W 12K J
	R586	VE-30000636	SMD R	1/10W 27K J
	R587	VE-30000469	SMD R	1/10W 1K J
	R588	VE-30000469	SMD R	1/10W 1K J
	R589	VE-30000457	SMD R	1/10W 10R J
	R590	VE-30000469	SMD R	1/10W 1K J
	R591	VE-30000457	SMD R	1/10W 10R J
	R592	VE-30000464	SMD R	1/10W 100R J
	R593	VE-30000469	SMD R	1/10W 1K J
	R594	VE-30000469	SMD R	1/10W 1K J
	R595	VE-30000457	SMD R	1/10W 10R J
	R596	VE-30000717	SMD R	1/10W 470R J
	R597	VE-30000475	SMD R	1/10W 10K J
	R598	VE-30000721	SMD R	1/10W 4.7K J
	R599	VE-30000797	SMD R	1/10W 75R J
	R600	VE-30000475	SMD R	1/10W 10K J
△	R613	VE-30001231	FUSE R	1/4W 27R J
	R614	VE-30000797	SMD R	1/10W 75R J

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
	C501	VE-30000407	EL CAP.	470UF 16V M
	C502	VE-30000294	SMD CAP.	100NF 50V K
	C504	VE-30000352	EL CAP.	100UF 16V M
	C505	VE-30000407	EL CAP.	470UF 16V M
	C507	VE-30000284	SMD CAP.	1NF 50V K R
	C508	VE-30000284	SMD CAP.	1NF 50V K R
	C509	VE-30000252	SMD CAP.	47PF 50V J
	C510	VE-30000252	SMD CAP.	47PF 50V J
	C511	VE-30000332	SMD CAP.	4.7NF 50V K
	C512	VE-30000332	SMD CAP.	4.7NF 50V K
	C513	VE-30000332	SMD CAP.	4.7NF 50V K
	C514	VE-30000332	SMD CAP.	4.7NF 50V K
	C516	VE-30000371	EL CAP.	22UF 50V M
	C517	VE-30000294	SMD CAP.	100NF 50V K
	C521	VE-30000371	EL CAP.	22UF 50V M
	C522	VE-30000109	MKT CAP.	470NF 63V J
	C523	VE-30000109	MKT CAP.	470NF 63V J
	C524	VE-30000109	MKT CAP.	470NF 63V J
	C525	VE-30000109	MKT CAP.	470NF 63V J
	C526	VE-30000265	SMD CAP.	560PF 50V J
	C527	VE-30000109	MKT CAP.	470NF 63V J
	C528	VE-30000109	MKT CAP.	470NF 63V J
	C529	VE-30000294	SMD CAP.	100NF 50V K
	C530	VE-30000393	EL CAP.	3.3UF 50V M
	C531	VE-30000345	EL CAP.	10UF 50V M
	C532	VE-30000345	EL CAP.	10UF 50V M
	C533	VE-30000345	EL CAP.	10UF 50V M
	C534	VE-30000284	SMD CAP.	1NF 50V K R
	C535	VE-30000284	SMD CAP.	1NF 50V K R
	C536	VE-30000216	SMD CAP.	1.8PF 50V J CH
	C537	VE-30000216	SMD CAP.	1.8PF 50V J CH
	C538	VE-30000284	SMD CAP.	1NF 50V K R
	C539	VE-30000284	SMD CAP.	1NF 50V K R
	C540	VE-30000284	SMD CAP.	1NF 50V K R

[AV28BH7ENS , AV28BH7ENB]

△ Symbol No.	Part No.	Part Name	Description
--------------	----------	-----------	-------------

CAPACITOR

C541	VE-30000284	SMD CAP.	1NF 50V K R
C542	VE-30000263	SMD CAP.	56PF 50V J CH
C543	VE-30000294	SMD CAP.	100NF 50V K
C544	VE-30000294	SMD CAP.	100NF 50V K
C545	VE-30000284	SMD CAP.	1NF 50V K R
C546	VE-30000284	SMD CAP.	1NF 50V K R
C547	VE-30000284	SMD CAP.	1NF 50V K R
C548	VE-30000284	SMD CAP.	1NF 50V K R
C549	VE-30000294	SMD CAP.	100NF 50V K
C550	VE-30000294	SMD CAP.	100NF 50V K
C551	VE-30000407	EL CAP.	470UF 16V M
C552	VE-30000407	EL CAP.	470UF 16V M
C553	VE-30000204	SMD CAP.	150PF 50V J
C554	VE-30000204	SMD CAP.	150PF 50V J
C556	VE-30000352	EL CAP.	100UF 16V M
C557	VE-30000332	SMD CAP.	4.7NF 50V K
C558	VE-30000332	SMD CAP.	4.7NF 50V K
C560	VE-30000074	MKT CAP.	100NF 63V J
C561	VE-30000247	SMD CAP.	39PF 50V J
C562	VE-30000247	SMD CAP.	39PF 50V J
C563	VE-30000294	SMD CAP.	100NF 50V K
C564	VE-30000332	SMD CAP.	4.7NF 50V K
C565	VE-30000332	SMD CAP.	4.7NF 50V K
C566	VE-30000109	MKT CAP.	470NF 63V J
C567	VE-30000109	MKT CAP.	470NF 63V J
C569	VE-30000109	MKT CAP.	470NF 63V J
C576	VE-30000109	MKT CAP.	470NF 63V J
C582	VE-30000092	MKT CAP.	220NF 63V J
C583	VE-30000204	SMD CAP.	150PF 50V J
C584	VE-30000204	SMD CAP.	150PF 50V J
C585	VE-30000092	MKT CAP.	220NF 63V J
C586	VE-30000092	MKT CAP.	220NF 63V J
C587	VE-30000092	MKT CAP.	220NF 63V J
C590	VE-30000332	SMD CAP.	4.7NF 50V K
C591	VE-30000332	SMD CAP.	4.7NF 50V K
C592	VE-30000092	MKT CAP.	220NF 63V J
C612	VE-30000204	SMD CAP.	150PF 50V J
C614	VE-30000294	SMD CAP.	100NF 50V K
C615	VE-30000284	SMD CAP.	1NF 50V K R
C616	VE-30000294	SMD CAP.	100NF 50V K
C617	VE-30000294	SMD CAP.	100NF 50V K
C618	VE-30000294	SMD CAP.	100NF 50V K
C619	VE-30000294	SMD CAP.	100NF 50V K
C620	VE-30000092	MKT CAP.	220NF 63V J
C623	VE-30000371	EL CAP.	22UF 50V M
C624	VE-30000371	EL CAP.	22UF 50V M
C626	VE-30000371	EL CAP.	22UF 50V M
C627	VE-30000371	EL CAP.	22UF 50V M
C628	VE-30000371	EL CAP.	22UF 50V M
C629	VE-30000371	EL CAP.	22UF 50V M
C630	VE-30000294	SMD CAP.	100NF 50V K
C631	VE-30000237	SMD CAP.	33PF 50V J
C632	VE-30000237	SMD CAP.	33PF 50V J
C633	VE-30000237	SMD CAP.	33PF 50V J
C634	VE-30000237	SMD CAP.	33PF 50V J
C635	VE-30000232	SMD CAP.	270PF 50V J
C636	VE-30000256	SMD CAP.	470PF 50V J
C637	VE-30000237	SMD CAP.	33PF 50V J
C638	VE-30000289	SMD CAP.	10NF 50V K R
C640	VE-30000332	SMD CAP.	4.7NF 50V K
C641	VE-30000332	SMD CAP.	4.7NF 50V K
C643	VE-30000294	SMD CAP.	100NF 50V K
C644	VE-30000294	SMD CAP.	100NF 50V K

COIL

L501	VE-30001996	FIXED COIL	22UH
L502	VE-30001996	FIXED COIL	22UH
L503	VE-30001996	FIXED COIL	22UH
L504	VE-30001996	FIXED COIL	22UH
L505	VE-30001996	FIXED COIL	22UH
L506	VE-30001996	FIXED COIL	22UH
L507	VE-30001996	FIXED COIL	22UH
L508	VE-30001996	FIXED COIL	22UH
L509	VE-30001996	FIXED COIL	22UH
L510	VE-30001996	FIXED COIL	22UH
L513	VE-30001996	FIXED COIL	22UH
L514	VE-30001996	FIXED COIL	22UH
L515	VE-30001996	FIXED COIL	22UH
L516	VE-30001996	FIXED COIL	22UH
L517	VE-30001996	FIXED COIL	22UH

DIODE

D501	VE-30001369	ZPD ZENER DIODE	3.6V
D502	VE-30001284	DIODE	0.15A/100V 0.5A
D504	VE-30001285	SMD DIODE	
D505	VE-30001285	SMD DIODE	
IC504	VE-30001349	ZENER DIODE	11V

△ Symbol No.	Part No.	Part Name	Description
--------------	----------	-----------	-------------

TRANSISTOR

Q501	VE-30001458	SMD TRANSISTOR
Q502	VE-30001457	SMD TRANSISTOR
Q503	VE-30001457	SMD TRANSISTOR
Q504	VE-30001457	SMD TRANSISTOR
Q505	VE-30001457	SMD TRANSISTOR
Q506	VE-30001457	SMD TRANSISTOR
Q507	VE-30001457	SMD TRANSISTOR
Q508	VE-30001457	SMD TRANSISTOR
Q509	VE-30001457	SMD TRANSISTOR
Q510	VE-30001457	SMD TRANSISTOR
Q511	VE-30001457	SMD TRANSISTOR
Q512	VE-30001457	SMD TRANSISTOR
Q513	VE-30001457	SMD TRANSISTOR
Q514	VE-30001457	SMD TRANSISTOR
Q515	VE-30001457	SMD TRANSISTOR

IC

IC501	VE-30013658	I.C.
IC502	VE-30001619	I.C.

OTHERS

L520	VE-30013413	FERRITE BEAD
L521	VE-30013413	FERRITE BEAD
L522	VE-30013413	FERRITE BEAD
L523	VE-30013413	FERRITE BEAD
L524	VE-30013413	FERRITE BEAD
L525	VE-30013413	FERRITE BEAD
L526	VE-30013413	FERRITE BEAD
L527	VE-30013413	FERRITE BEAD
L533	VE-30013413	FERRITE BEAD
L534	VE-30013413	FERRITE BEAD
L535	VE-30013413	FERRITE BEAD
L536	VE-30010964	SMD FERRITE
L537	VE-30010964	SMD FERRITE
X501	VE-30001756	XTAL

18.432MHZ

FEATURE BOX P.W. BOARD ASS'Y (VE-20055386)

△ Symbol No.	Part No.	Part Name	Description
R001	VE-30000659	SMD R	1/10W 330R J
R002	VE-30000464	SMD R	1/10W 100R J
R003	VE-30000688	SMD R	1/10W 390R J
R004	VE-300006462	SMD R	1/10W 22R J
R005	VE-30000553	SMD R	1/10W 33R J
R006	VE-30000588	SMD R	1/10W 220R J
R007	VE-30000469	SMD R	1/10W 1K J
R008	VE-30000659	SMD R	1/10W 330R J
R009	VE-30000659	SMD R	1/10W 330R J
R010	VE-30000659	SMD R	1/10W 330R J
R011	VE-30000659	SMD R	1/10W 330R J
R012	VE-30000659	SMD R	1/10W 330R J
R013	VE-30000659	SMD R	1/10W 330R J
R014	VE-30000659	SMD R	1/10W 330R J
R015	VE-30000659	SMD R	1/10W 330R J
R016	VE-30000659	SMD R	1/10W 330R J
R017	VE-30000659	SMD R	1/10W 330R J
R018	VE-30000659	SMD R	1/10W 330R J
R021	VE-30000659	SMD R	1/10W 330R J
R024	VE-30000797	SMD R	1/10W 75R J
R026	VE-30000797	SMD R	1/10W 75R J
R028	VE-30000797	SMD R	1/10W 75R J
R030	VE-30000797	SMD R	1/10W 75R J
R031	VE-30000833	SMD R	1/10W 91R J
R032	VE-30000244	SMD R	1/10W 150R J
R033	VE-30000475	SMD R	1/10W 10K J
R034	VE-30000469	SMD R	1/10W 1K J
R047	VE-30000797	SMD R	1/10W 75R J
R048	VE-300006462	SMD R	1/10W 22R J
R050	VE-30000597	SMD R	1/10W 22K J
R053	VE-30000797	SMD R	1/10W 75R J
R054	VE-30000797	SMD R	1/10W 75R J
R055	VE-30000797	SMD R	1/10W 75R J

[AV28BH7ENS , AV28BH7ENB]

△ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R056	VE-30000797	SMD R	1/10W 75R J
R057	VE-30000797	SMD R	1/10W 75R J
R058	VE-30000797	SMD R	1/10W 75R J
R059	VE-30000797	SMD R	1/10W 75R J
R074	VE-30000721	SMD R	1/10W 4.7K J
R075	VE-30000721	SMD R	1/10W 4.7K J
R076	VE-30000721	SMD R	1/10W 4.7K J
R079	VE-30000464	SMD R	1/10W 100R J
R080	VE-30000688	SMD R	1/10W 390R J
R081	VE-30006462	SMD R	1/10W 22R J
R082	VE-30000797	SMD R	1/10W 75R J
R083	VE-30000588	SMD R	1/10W 220R J
R084	VE-30000469	SMD R	1/10W 1K J
R085	VE-30000464	SMD R	1/10W 100R J
R086	VE-30000688	SMD R	1/10W 390R J
R087	VE-30006462	SMD R	1/10W 22R J
R088	VE-30000797	SMD R	1/10W 75R J
R089	VE-30000588	SMD R	1/10W 220R J
R090	VE-30000469	SMD R	1/10W 1K J
R091	VE-30000464	SMD R	1/10W 100R J
R092	VE-30000688	SMD R	1/10W 390R J
R093	VE-30006462	SMD R	1/10W 22R J
R094	VE-30000797	SMD R	1/10W 75R J
R095	VE-30000588	SMD R	1/10W 220R J
R096	VE-30000469	SMD R	1/10W 1K J
R098	VE-30000597	SMD R	1/10W 23K J
R099	VE-30000826	SMD R	1/10W 270R J
R100	VE-30000475	SMD R	1/10W 10K J
R101	VE-30000593	SMD R	1/10W 2.2K J
R105	VE-30000475	SMD R	1/10W 10K J
R106	VE-30000664	SMD R	1/10W 3.3K J
R107	VE-30000475	SMD R	1/10W 10K J
R108	VE-30000475	SMD R	1/10W 10K J
R110	VE-30000534	SMD R	1/10W 15K J
R111	VE-30000534	SMD R	1/10W 15K J
R112	VE-30000593	SMD R	1/10W 2.2K J
R117	VE-30000475	SMD R	1/10W 10K J
R119	VE-30000475	SMD R	1/10W 10K J
R120	VE-30000469	SMD R	1/10W 1K J
R121	VE-30006462	SMD R	1/10W 22R J
R122	VE-30000588	SMD R	1/10W 220R J
R125	VE-30000659	SMD R	1/10W 330R J
R126	VE-30000659	SMD R	1/10W 330R J
R127	VE-30000659	SMD R	1/10W 330R J
R128	VE-30000659	SMD R	1/10W 330R J
R129	VE-30000659	SMD R	1/10W 330R J
R130	VE-30000659	SMD R	1/10W 330R J
R131	VE-30000659	SMD R	1/10W 330R J
R132	VE-30000659	SMD R	1/10W 330R J
R133	VE-30000659	SMD R	1/10W 330R J
R134	VE-30000659	SMD R	1/10W 330R J
R135	VE-30000659	SMD R	1/10W 330R J
R136	VE-30000659	SMD R	1/10W 330R J
R137	VE-30000659	SMD R	1/10W 330R J
R138	VE-30000659	SMD R	1/10W 330R J
R140	VE-30000797	SMD R	1/10W 75R J
R141	VE-30000659	SMD R	1/10W 330R J
R142	VE-30000659	SMD R	1/10W 330R J
R143	VE-30000659	SMD R	1/10W 330R J
R144	VE-30000659	SMD R	1/10W 330R J
R145	VE-30000659	SMD R	1/10W 330R J
R149	VE-30000534	SMD R	1/10W 15K J
R150	VE-30000797	SMD R	1/10W 75R J
R151	VE-30000797	SMD R	1/10W 75R J
R152	VE-30000797	SMD R	1/10W 75R J
R153	VE-30000797	SMD R	1/10W 75R J
R154	VE-30000797	SMD R	1/10W 75R J
R155	VE-30000464	SMD R	1/10W 100R J
R156	VE-30000464	SMD R	1/10W 100R J
R157	VE-30000464	SMD R	1/10W 100R J
R158	VE-30000464	SMD R	1/10W 100R J
R159	VE-30000464	SMD R	1/10W 100R J
R161	VE-30000464	SMD R	1/10W 100R J
R162	VE-30000464	SMD R	1/10W 100R J
R163	VE-30000464	SMD R	1/10W 100R J
R164	VE-30000464	SMD R	1/10W 100R J
R165	VE-30000721	SMD R	1/10W 4.7K J

△ Symbol No.	Part No.	Part Name	Description
CAPACITOR			
C001	VE-30000309	SMD CAP.	2.2NF 50V K R
C002	VE-30000294	SMD CAP.	100NF 50V K
C003	VE-30000334	SMD CAP.	.47NF 50V K
C004	VE-30000309	SMD CAP.	2.2NF 50V K R
C005	VE-30000186	SMD CAP.	10PF 50V D COG
C006	VE-30000186	SMD CAP.	10PF 50V D COG
C007	VE-30000232	SMD CAP.	270PF 50V J
C008	VE-30000265	SMD CAP.	560PF 50V J
C009	VE-30000309	SMD CAP.	2.2NF 50V K R
C010	VE-30000232	SMD CAP.	270PF 50V J
C011	VE-30000265	SMD CAP.	560PF 50V J
C012	VE-30000309	SMD CAP.	2.2NF 50V K R
C013	VE-30000232	SMD CAP.	270PF 50V J
C014	VE-30000265	SMD CAP.	560PF 50V J
C015	VE-30000309	SMD CAP.	2.2NF 50V K R
C016	VE-30000232	SMD CAP.	270PF 50V J
C017	VE-30000265	SMD CAP.	560PF 50V J
C018	VE-30000309	SMD CAP.	2.2NF 50V K R
C019	VE-30000309	SMD CAP.	2.2NF 50V K R
C020	VE-30000294	SMD CAP.	100NF 50V K
C021	VE-30000345	EL CAP.	10UF 50V M
C022	VE-30000345	EL CAP.	10UF 50V M
C024	VE-30000345	EL CAP.	10UF 50V M
C026	VE-30000345	EL CAP.	10UF 50V M
C027	VE-30000345	EL CAP.	10UF 50V M
C028	VE-30000345	EL CAP.	10UF 50V M
C029	VE-30000242	SMD CAP.	330PF 50V J
C030	VE-30010560	SMD CAP.	220NF 25V K R
C031	VE-30000242	SMD CAP.	330PF 50V J
C032	VE-30010560	SMD CAP.	220NF 25V K R
C033	VE-30000242	SMD CAP.	330PF 50V J
C034	VE-30010560	SMD CAP.	220NF 25V K R
C035	VE-30000109	MKT CAP.	470NF 63V J
C036	VE-30000345	EL CAP.	10UF 50V M
C037	VE-30000345	EL CAP.	10UF 50V M
C038	VE-30000289	SMD CAP.	10NF 50V K R
C039	VE-30000371	EL CAP.	22UF 50V M
C040	VE-30000392	EL CAP.	0.33UF 50V M
C041	VE-30000371	EL CAP.	22UF 50V M
C042	VE-30000352	EL CAP.	0.33UF 50V M
C043	VE-30000352	EL CAP.	0.33UF 50V M
C045	VE-30000294	SMD CAP.	100NF 50V K
C046	VE-30000294	SMD CAP.	100NF 50V K
C047	VE-30000294	SMD CAP.	100NF 50V K
C048	VE-30000232	SMD CAP.	27PF 50V J CH
C049	VE-30000265	SMD CAP.	560PF 50V J
C050	VE-30000309	SMD CAP.	2.2NF 50V K R
C051	VE-30000232	SMD CAP.	270PF 50V J
C052	VE-30000265	SMD CAP.	560PF 50V J
C053	VE-30000309	SMD CAP.	2.2NF 50V K R
C054	VE-30000228	SMD CAP.	27PF 50V J CH
C055	VE-30000228	SMD CAP.	27PF 50V J CH
C056	VE-30000232	SMD CAP.	270PF 50V J
C057	VE-30000265	SMD CAP.	560PF 50V J
C058	VE-30000309	SMD CAP.	2.2NF 50V K R
C059	VE-30000284	SMD CAP.	10NF 50V K R
C060	VE-30000289	SMD CAP.	10NF 50V K R
C061	VE-30000294	SMD CAP.	100NF 50V K
C062	VE-30000294	SMD CAP.	100NF 50V K
C063	VE-30000289	SMD CAP.	10NF 50V K R
C064	VE-30000289	SMD CAP.	10NF 50V K R
C065	VE-30000289	SMD CAP.	10NF 50V K R
C066	VE-30000289	SMD CAP.	10NF 50V K R
C067	VE-30000289	SMD CAP.	10NF 50V K R
C068	VE-30000294	SMD CAP.	100NF 50V K
C069	VE-30000289	SMD CAP.	10NF 50V K R
C070	VE-30000289	SMD CAP.	10NF 50V K R
C071	VE-30000289	SMD CAP.	10NF 50V K R
C072	VE-30000309	SMD CAP.	2.2NF 50V K R
C073	VE-30000255	SMD CAP.	560PF 50V J
C074	VE-30000345	EL CAP.	10UF 50V M
C075	VE-30000345	EL CAP.	10UF 50V M
C076	VE-30000345	EL CAP.	10UF 50V M
C077	VE-30000345	EL CAP.	10UF 50V M
C078	VE-30000109	MKT CAP.	470NF 63V J
C079	VE-30000109	MKT CAP.	470NF 63V J
C080	VE-30000345	EL CAP.	10UF 50V M
C081	VE-30000345	EL CAP.	10UF 50V M
C082	VE-30000345	EL CAP.	10UF 50V M
C083	VE-30000294	SMD CAP.	100NF 50V K
C084	VE-30000186	SMD CAP.	10PF 50V D COG
C085	VE-30000232	SMD CAP.	270PF 50V J
C086	VE-30000309	SMD CAP.	2.2NF 50V K R
C087	VE-30000255	SMD CAP.	560PF 50V J
C088	VE-30000232	SMD CAP.	270PF 50V J
C089	VE-30000232	SMD CAP.	270PF 50V J
C090	VE-30000265	SMD CAP.	560PF 50V J
C091	VE-30000309	SMD CAP.	2.2NF 50V K R
C092	VE-30000309	SMD CAP.	560PF 50V J
C093	VE-30000265	SMD CAP.	270PF 50V J
C094	VE-30000232	SMD CAP.	270PF 50V J
C095	VE-30000232	SMD CAP.	270PF 50V J
C096	VE-30000265	SMD CAP.	560PF 50V J
C097	VE-30000309	SMD CAP.	2.2NF 50V K R
C098	VE-30000345	EL CAP.	10UF 50V M
C099	VE-30000345	EL CAP.	10UF 50V M
C100	VE-30000393	EL CAP.	3.3UF 50V M
C101	VE-30000393	EL CAP.	0.33UF 50V M
C102	VE-30000345	EL CAP.	10UF 50V M
C103	VE-30000289	SMD CAP.	10NF 50V K R

[AV28BH7ENS , AV28BH7ENB]

△ Symbol No.	Part No.	Part Name	Description
CAPACITOR			
C104	VE-30000284	SMD CAP.	1NF 50V K R
C105	VE-30000294	SMD CAP.	100NF 50V K
C106	VE-30000294	SMD CAP.	100NF 50V K
C107	VE-30000186	SMD CAP.	10PF 50V D COG
C108	VE-30000345	EL CAP.	10UF 50V M
C109	VE-30000294	SMD CAP.	100NF 50V K
C110	VE-30000186	SMD CAP.	10PF 50V D COG
C111	VE-30000186	SMD CAP.	10PF 50V D COG
C112	VE-30000284	SMD CAP.	1NF 50V K R
C113	VE-30000242	SMD CAP.	330PF 50V J
C25	VE-30000109	MKT CAP.	470NF 63V J
COIL			
L001	VE-30001992	FIXED COIL	10UH
L002	VE-30001992	FIXED COIL	10UH
L003	VE-30001992	FIXED COIL	10UH
L004	VE-30001986	FIXED COIL	3.3UH
L005	VE-30001986	FIXED COIL	3.3UH
L006	VE-30001996	FIXED COIL	22UH
L007	VE-30001986	FIXED COIL	3.3UH
L008	VE-30001986	FIXED COIL	3.3UH
L009	VE-30001986	FIXED COIL	3.3UH
L010	VE-30001986	FIXED COIL	3.3UH
DIODE			
D001	VE-30001284	DIODE	0.15A/100V 0.5A
D002	VE-30001284	DIODE	0.15A/100V 0.5A
D003	VE-30001284	DIODE	0.15A/100V 0.5A
TRANSISTOR			
Q001	VE-30001454	TRANSISTOR	
Q002	VE-30001454	TRANSISTOR	
Q003	VE-30001455	TRANSISTOR	
Q004	VE-30001454	TRANSISTOR	
Q005	VE-30001454	TRANSISTOR	
Q006	VE-30001455	TRANSISTOR	
Q007	VE-30001454	TRANSISTOR	
Q008	VE-30001454	TRANSISTOR	
Q009	VE-30001455	TRANSISTOR	
Q010	VE-30001454	TRANSISTOR	
Q011	VE-30001454	TRANSISTOR	
Q012	VE-30001455	TRANSISTOR	
Q013	VE-30001454	TRANSISTOR	
Q014	VE-30001454	TRANSISTOR	
Q015	VE-30001454	TRANSISTOR	
IC			
IC001	VE-30010350	I.C.	
IC002	VE-30010348	I.C.	
IC003	VE-3000768	I.C.	
IC004	VE-30007739	I.C.	
IC005	VE-30010349	I.C.	
OTHERS			
X001	VE-30008778	XTAL	20.25MHZ
X002	VE-30008782	XTAL	5MHZ
Z1	VE-30001962	FERRITE	
Z10	VE-30001962	FERRITE	
Z14	VE-30001962	FERRITE	
Z18	VE-30001962	FERRITE	
Z24	VE-30001962	FERRITE	
Z25	VE-30001962	FERRITE	
Z26	VE-30001962	FERRITE	
Z37	VE-30001962	FERRITE	
Z38	VE-30001962	FERRITE	

△ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R906	VE-30000499	SMD R	1/10W 1.2K J
R907	VE-30017132	MF R	1W 51K F
R908	VE-30000499	SMD R	1/10W 1.2K J
R909	VE-30000524	SMD R	1/10W 150R J
R910	VE-30001084	MO R	1W 1K J
R911	VE-30000499	SMD R	1/10W 1.2K J
R912	VE-30017132	MF R	1W 51K F
R913	VE-30000499	SMD R	1/10W 1.2K J
R914	VE-30000524	SMD R	1/10W 150R J
R915	VE-30001084	MO R	1W 1K J
R916	VE-30001125	MO R	2W 2.2K J
R917	VE-30001170	MO R	1W 4.7K J
R918	VE-30000788	CF R	1/2W 6.8M J
R920	VE-30000535	CF R	1/2W 150K J
R922	VE-30000477	CF R	1/4W 100K J
R923	VE-30000477	CF R	1/4W 100K J
R924	VE-30000477	CF R	1/4W 100K J
R925	VE-30007788	SMD R	1/10W 2.7K F
R926	VE-30000469	SMD R	1/10W 1K J
△ R927	VE-30001249	FUSE R	1W 4.7R J
R929	VE-30000466	CF R	1/4W 1K J
R931	VE-30000593	SMD R	1/10W 2.2K J
R932	VE-30000471	CF R	1/4W 10K J
△ R944	VE-30001211	FUSE R	1W 1K J
CAPACITOR			
C901	VE-30000202	CER CAP.	15PF 50V J CH
C902	VE-30000294	SMD CAP.	100NF 50V K
C903	VE-30000075	MKT CAP.	100NF 250V K (DC)
C904	VE-30000265	SMD CAP.	560PF 50V J
C905	VE-30000209	SMD CAP.	18PF 50V J
C906	VE-30000294	SMD CAP.	100NF 50V K
C907	VE-30000075	MKT CAP.	100NF 250V K (DC)
C908	VE-30000265	SMD CAP.	560PF 50V J
C909	VE-30000220	SMD CAP.	22PF 50V J
C910	VE-30000294	SMD CAP.	100NF 50V K
C911	VE-30000075	MKT CAP.	100NF 250V K (DC)
C912	VE-30000265	SMD CAP.	560PF 50V J
C914	VE-30000072	MKT CAP.	10NF 1250V J
C915	VE-30000415	EL CAP.	4.7UF 250V M
C916	VE-30000330	CER CAP.	4.7NF 50V K B
C919	VE-30000352	EL CAP.	100UF 16V M
C920	VE-30000294	SMD CAP.	100NF 50V K
C922	VE-30000075	MKT CAP.	100NF 250V K (DC)
C923	VE-30000406	EL CAP.	47UF 250V M (HR) 10 ⁵
C931	VE-30000265	SMD CAP.	560PF 50V J
C934	VE-30000294	SMD CAP.	100NF 50V K
C935	VE-30000294	SMD CAP.	100NF 50V K
C936	VE-30000075	MKT CAP.	100NF 250V K (DC)
C938	VE-30000433	CER CAP.	1NF 1KV M B
C941	VE-30000295	CER CAP.	100NF 50V Z F
C942	VE-30000436	CER CAP.	10NF 1KV ZE
C949	VE-30000294	SMD CAP.	100NF 50V K
COIL			
J909	VE-30001992	FIXED COIL	10UH
L904	VE-30001997	FIXED COIL	33UH
L906	VE-30001992	FIXED COIL	10UH
L921	VE-30001994	FIXED COIL	22UH J AXIAL
DIODE			
D902	VE-30001318	DIODE	1A/800V 20A
D907	VE-30001284	DIODE	0.15A/100V 0.5A
D908	VE-30001291	DIODE	1A/800V 30A
D909	VE-30001353	ZENER DIODE	18V
SP902	VE-30001347	ZENER DIODE	8.2V
TRANSISTOR			
Q901	VE-30001427	TRANSISTOR	
Q902	VE-30001455	TRANSISTOR	
IC			
IC901	VE-30001551	I.C.	
IC902	VE-30001551	I.C.	
IC903	VE-30001551	I.C.	
OTHERS			
△ J907	VE-30006712	FERRITE BEAD	
PL904	VE-30001855	CRT SOCKET	
SP901	VE-30000428	SPARK GAP	300V
SP903	VE-30000428	SPARK GAP	300V
SP904	VE-30000428	SPARK GAP	300V
SP905	VE-30000428	SPARK GAP	300V
SP906	VE-30000428	SPARK GAP	300V

[AV28BH7ENS , AV28BH7ENB]**FRONT CONTROL P.W. BOARD ASS'Y**

(VE-20082481)

△ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R1	VE-30000689	CF R	1/4W 3.9K J
R2	VE-30000526	CF R	1/4W 1.5K J
R3	VE-30000770	CF R	1/4W 680R J
R4	VE-30000711	CF R	1/4W 470R J
R5	VE-30000622	CF R	1/4W 270R J
DIODE			
D1	VE-30001279	LED(RED/GREEN)	
IC			
IC1	VE-30001670	PREAMPLIFIER	
OTHERS			
SW1	VE-30002181	TACT SWITCH	
SW2	VE-30002181	TACT SWITCH	
SW3	VE-30002181	TACT SWITCH	
SW4	VE-30002181	TACT SWITCH	
SW5	VE-30002181	TACT SWITCH	

FRONT AV + HEADPHONE JACK P.W. BOARD ASS'Y (VE-20083091)

△ Symbol No.	Part No.	Part Name	Description
RESISTOR			
R107	VE-30000594	CF R	1/4W 22K J
R108	VE-30000712	CF R	1/4W 470R J
R109	VE-30000594	CF R	1/4W 22K J
R110	VE-30000712	CF R	1/4W 470R J
R113	VE-30000744	CF R	1/4W 560R J
R114	VE-30000744	CF R	1/4W 560R J
R115	VE-30000712	CF R	1/4W 470R J
R116	VE-30000712	CF R	1/4W 470R J
CAPACITOR			
C103	VE-30000213	CER CAP.	180PF 50V J CH
C104	VE-30000213	CER CAP.	180PF 50V J CH
C106	VE-30000190	CER CAP.	100PF 50V J CH
COIL			
L103	VE-30001996	FIXED COIL	22UH
L104	VE-30001996	FIXED COIL	22UH
OTHERS			
CON102	VE-30001893	RCA JACK	
CON103	VE-30001891	RCA JACK	
CON104	VE-30001892	RCA JACK	
CON106	VE-30001900	HEADPHONE JACK	HP01/2/3/4/5/6
T103	VE-30001962	FERRITE	
T104	VE-30001963	FERRITE	
T107	VE-30001963	FERRITE	

PRINTED WIRING BOARD PARTS LIST

[AV28BH7EPS , AV28BH7EPB]

MAIN P.W. BOARD ASS'Y (VE-20105616)

△ Symbol No.	Part No.	Part Name	Description	△ Symbol No.	Part No.	Part Name	Description
RESISTOR							
R101	VE-30000668	SMD R	1/10W 33K J	R256	VE-30001100	MO R	1W 150R J
R102	VE-30007782	MF R	1/4W 3.9M F	R260	VE-30000778	SMD R	1/10W 6.8K J
R103	VE-30000855	MF R	1/4W 1M F	R261	VE-30000778	SMD R	1/10W 6.8K J
R104	VE-30000668	SMD R	1/10W 33K J	R262	VE-30001237	FUSE R	1/2W 3.3R J
R105	VE-30000452	CF R	1/4W 10R J	R264	VE-30001077	MO R	2W 10R J
R106	VE-30000664	SMD R	1/10W 3.3K J	R270	VE-30000541	CF R	1/4W 1.5M J
R107	VE-30007019	SMD R	1/10W 10K J	R271	VE-30000744	CF R	1/4W 560R J
R108	VE-30007784	MO R	5W 33K 1(RADIAL)	R272	VE-30000475	SMD R	1/10W 47K J
R116	VE-30001171	MO R	2W 4.7K J	R280	VE-30000480	SMD R	1/10W 100K J
R117	VE-30001257	MG R	1/2W 4.7M J	R281	VE-30000469	SMD R	1/10W 1K J
R118	VE-30009036	FUSE R	1/2W 0.1R J	R319	VE-30000594	CF R	1/4W 22K J
R119	VE-30009036	FUSE R	1/2W 0.1R J	R323	VE-30000459	CF R	1/4W 100R J
R120	VE-30000814	SMD R	1/10W 820R J	R324	VE-30000464	SMD R	1/10W 100R J
R122	VE-30000469	SMD R	1/10W 1K J	R327	VE-30000464	SMD R	1/10W 100R J
R123	VE-30000469	SMD R	1/10W 1K J	R360	VE-30000659	SMD R	1/10W 330R J
R124	VE-30000480	SMD R	1/10W 100K J	R361	VE-30000659	SMD R	1/10W 330R J
R125	VE-30000927	MF R	1/4W 220K J	R362	VE-30000659	SMD R	1/10W 330R J
R126	VE-30000664	SMD R	1/10W 3.3K J	R363	VE-30000659	SMD R	1/10W 330R J
R127	VE-30000469	SMD R	1/10W 1K J	R364	VE-30000659	SMD R	1/10W 330R J
R128	VE-30000536	CF R	1/4W 150K J	R365	VE-30000659	SMD R	1/10W 330R J
R129	VE-30007019	SMD R	1/10W 10K F	R366	VE-30000659	SMD R	1/10W 330R J
R130	VE-30000721	SMD R	1/10W 4.7K J	R367	VE-30000659	SMD R	1/10W 330R J
R134	VE-30000469	SMD R	1/10W 1K J	R368	VE-30000659	SMD R	1/10W 330R J
R135	VE-30007790	SMD R	1/10W 4.3K F	R369	VE-30000659	SMD R	1/10W 330R J
R136	VE-30000774	SMD R	1/10W 680R J	R370	VE-30000659	SMD R	1/10W 330R J
R137	VE-30007021	SMD R	1/10W 1K F	R371	VE-30000659	SMD R	1/10W 330R J
R138	VE-30007786	SMD R	1/10W 2.55K F	R372	VE-30000659	SMD R	1/10W 330R J
R139	VE-30000774	SMD R	1/10W 680R J	R373	VE-30000659	SMD R	1/10W 330R J
R140	VE-30000459	CF R	1/4W 100R J	R374	VE-30000659	SMD R	1/10W 330R J
R141	VE-30000475	SMD R	1/10W 10K J	R375	VE-30000659	SMD R	1/10W 330R J
R142	VE-30000475	SMD R	1/10W 10K J	R376	VE-30000659	SMD R	1/10W 330R J
R143	VE-30007021	SMD R	1/10W 1K F	R378	VE-30000659	SMD R	1/10W 330R J
R144	VE-30007788	SMD R	1/10W 2.7K F	R379	VE-30000659	SMD R	1/10W 330R J
R145	VE-30000732	SMD R	1/10W 470K J	R380	VE-30000659	SMD R	1/10W 330R J
R146	VE-30000469	FUSE R	1/10W 1K J	R381	VE-30000659	SMD R	1/10W 330R J
R148	VE-30014023	FUSE R	1/2W 0.1R J VISHAY	R382	VE-30000659	SMD R	1/10W 330R J
R149	VE-30007204	FUSE R	1/2W 0.1R J VISHAY	R383	VE-30000659	SMD R	1/10W 330R J
R150	VE-30007783	FUSE R	1/2W 0.1R J VISHAY	R384	VE-30000659	SMD R	1/10W 330R J
R151	VE-30014023	FUSE R	1/2W 0.1R J VISHAY	R385	VE-30000659	SMD R	1/10W 330R J
R152	VE-30000659	SMD R	1/10W 330R J	R387	VE-30000659	SMD R	1/10W 330R J
R153	VE-30012649	SMD R	1/16W 150R J	R397	VE-30000659	SMD R	1/10W 330R J
R154	VE-30012984	SMD R	1/16W 91R J	R398	VE-30000659	SMD R	1/10W 330R J
R155	VE-30000712	CF R	1/4W 470R J	R401	VE-30000665	CF R	1/4W 33K J
R156	VE-30001089	MO R	2W 1R J	R403	VE-30000668	SMD R	1/10W 33K J
R157	VE-30000534	SMD R	1/10W 15K J	R411	VE-30000664	SMD R	1/10W 3.3K J
R158	VE-30000475	SMD R	1/10W 10K J	R412	VE-30000751	SMD R	1/10W 5.6K J
R159	VE-30000480	SMD R	1/10W 100K J	R413	VE-30000475	SMD R	1/10W 10K J
R160	VE-30006923	SMD R	1/10W 4.3K J	R414	VE-30000469	SMD R	1/10W 1K J
R202	VE-30007779	MO R	5W 47R J (RADIAL)	R415	VE-30000517	SMD R	1/10W 15R J
R203	VE-30000631	SMD R	1/10W 2.7K J	R416	VE-30000717	SMD R	1/10W 470R J
R205	VE-30017136	MO R	1W 0.56R J	R417	VE-30000778	SMD R	1/10W 6.8K J
R206	VE-30001080	MO R	2W 100R J	R418	VE-30000593	SMD R	1/10W 2.2K J
R210	VE-30000583	CF R	1/4W 220R J	R421	VE-30000563	SMD R	1/10W 1.8K J
R211	VE-30000721	SMD R	1/10W 4.7K J	R422	VE-30000464	SMD R	1/10W 100R J
R212	VE-30000593	SMD R	1/10W 2.2K J	R424	VE-30007021	SMD R	1/10W 1K F
R213	VE-30000593	SMD R	1/10W 2.2K J	R425	VE-30000797	SMD R	1/10W 75R J
R214	VE-30000593	SMD R	1/10W 2.2K J	R428	VE-30000475	SMD R	1/10W 10K J
R215	VE-30000721	SMD R	1/10W 4.7K J	R429	VE-30000475	SMD R	1/10W 10K J
R216	VE-30000631	SMD R	1/10W 2.7K J	R432	VE-30000787	SMD R	1/10W 680K J
R217	VE-30000593	SMD R	1/10W 2.2K J	R437	VE-30000721	SMD R	1/10W 4.7K J
R218	VE-30000480	SMD R	1/10W 100K J	R438	VE-30000655	CF R	1/14W 330R J
R220	VE-30000590	CF R	1/4W 2.2K J	R439	VE-30000560	CF R	1/4W 1.8K J
R225	VE-30001086	MO R	2W 10K J	R441	VE-30000751	SMD R	1/10W 5.6K J
R226	VE-30001168	MO R	2W 470R J	R445	VE-30000814	SMD R	1/10W 820R J
R227	VE-30000469	SMD R	1/10W 1K J	R446	VE-30000469	SMD R	1/10W 1K J
R228	VE-30000475	SMD R	1/10W 10K J	R447	VE-30000469	SMD R	1/10W 1K J
R229	VE-30000727	SMD R	1/10W 47K J	R475	VE-30000524	SMD R	1/10W 150R J
R230	VE-30000902	MF R	1/4W 1.8K F	R480	VE-30000718	CF R	1/14W 4.7K J
R231	VE-30001229	FUSE R	1W 2.2R J	R490	VE-30000466	CF R	1/4W 1K J
R232	VE-30001027	MF R	1/4W 82K J	R492	VE-30000503	SMD R	1/10W 12K J
R233	VE-30001244	FUSE R	1/2W 0.47R J	R506	VE-30012695	SMD R	1/16W 470R J
R234	VE-30000936	FUSE R	1/2W 0.1R J	R509	VE-30000797	SMD R	1/10W 75R J
R235	VE-30000668	SMD R	1/10W 33K J	R510	VE-30007021	SMD R	1/10W 1K F
R236	VE-30000718	CF R	1/4W 4.7K J	R511	VE-30000464	SMD R	1/10W 100R J
R237	VE-30001244	FUSE R	1/2W 0.47R J	R512	VE-30000464	SMD R	1/10W 100R J
R238	VE-30000729	CF R	1/4W 470K J	R513	VE-30000457	SMD R	1/10W 10R J
R239	VE-30001215	FUSE R	1W 1R J	R516	VE-30000726	SMD R	1/10W 5.1K J
R240	VE-30000469	SMD R	1/10W 1K J	R517	VE-30007026	SMD R	1/10W 4.7K J
R241	VE-30000818	SMD R	1/10W 8.2K J	R518	VE-30000735	SMD R	1/10W 4.7K J
R242	VE-30000784	CF R	1/4W 680K J	R801	VE-30000718	CF R	1/4W 4.7K J
R245	VE-30000466	CF R	1/4W 1K J	R802	VE-30000718	CF R	1/4W 4.7K J
R246	VE-30001027	MF R	1/4W 82K J	R803	VE-30000628	CF R	1/4W 2.7K J
R250	VE-30000477	CF R	1/4W 100K J	R804	VE-30000475	SMD R	1/10W 10K J
R251	VE-30000477	CF R	1/4W 100K J	R805	VE-30000524	SMD R	1/10W 15K J
R252	VE-30000789	SMD R	1/10W 27K J	R806	VE-30000531	CF R	1/10W 18K J
R254	VE-30000636	SMD R	1/10W 27K J	R807	VE-30000567	SMD R	1/10W 18K J

[AV28BH7EPS , AV28BH7EPB]

△	Symbol No.	Part No.	Part Name	Description
RESISTOR				
R808	VE-30000734	CF R	1/4W 4.7R J	
R809	VE-30000717	SMD R	1/10W 470R J	
R810	VE-30000564	CF R	1/4W 18K J	
R811	VE-30000717	SMD R	1/10W 470R J	
R812	VE-30000734	CF R	1/4W 4.7R J	
R813	VE-30000475	SMD R	1/10W 10K J	
R814	VE-30000734	CF R	1/4W 4.7R J	
R815	VE-30000734	SMD R	1/4W 4.7R J	
R816	VE-30000734	CF R	1/4W 4.7R J	
R900	VE-30012641	SMD R	1/16W 10K J	
R901	VE-30012641	SMD R	1/16W 10K J	
R902	VE-30012641	SMD R	1/16W 10K J	
R903	VE-30000718	CF R	1/4W 4.7K J	
R904	VE-30000718	CF R	1/4W 4.7K J	
R905	VE-30000723	CF R	1/4W 47K J	
R906	VE-30012696	SMD R	1/16W 47K J	
R907	VE-30012679	SMD R	1/16W 3.9K J	
R908	VE-30012679	SMD R	1/16W 3.9K J	
R909	VE-30000531	CF R	1/4W 15K J	
R910	VE-30000531	CF R	1/4W 15K J	
R911	VE-30012641	SMD R	1/16W 10K J	
R912	VE-30000471	CF R	1/16W 10K J	
R913	VE-30012641	SMD R	1/16W 10K J	
R914	VE-30000471	CF R	1/4W 10K J	
R915	VE-30000471	CF R	1/4W 10K J	
R916	VE-30012695	SMD R	1/16W 470R J	
R917	VE-30012687	SMD R	1/16W 55R J	
R918	VE-30012692	SMD R	1/16W 4.7K J	
R919	VE-30012657	SMD R	1/16W 1K J	
R920	VE-30012657	SMD R	1/16W 1K J	
R921	VE-30012657	SMD R	1/16W 1K J	
R922	VE-30012657	SMD R	1/16W 1K J	
R923	VE-30012657	SMD R	1/16W 1K J	
R924	VE-30012696	SMD R	1/16W 47K J	
R925	VE-30012696	SMD R	1/16W 47K J	
R926	VE-30012696	SMD R	1/16W 47K J	
R927	VE-30012696	SMD R	1/16W 47K J	
R928	VE-30012510	SMD R	1/16W 100R J	
R929	VE-30012510	SMD R	1/16W 100R J	
R930	VE-30012641	SMD R	1/16W 10K J	
R931	VE-30012641	SMD R	1/16W 10K J	
R932	VE-30012641	SMD R	1/16W 10K J	
R933	VE-30000718	CF R	1/4W 4.7K J	
R934	VE-30012692	SMD R	1/16W 4.7K J	
R935	VE-30012662	SMD R	1/16W 2.7K J	
R936	VE-30000718	CF R	1/4W 4.7K J	
R937	VE-30000459	CF R	1/4W 100R J	
R938	VE-30012509	SMD R	1/16W 100K J	
R939	VE-30012692	SMD R	1/16W 4.7K J	
R940	VE-30000500	CF R	1/4W 12K J	
R941	VE-30000588	SMD R	1/10W 220R J	
R942	VE-30000588	SMD R	1/10W 220R J	
R943	VE-30000471	CF R	1/4W 10K J	
R944	VE-30012641	SMD R	1/16W 10K J	
R945	VE-30000471	CF R	1/4W 10K J	
R946	VE-30012657	SMD R	1/16W 1K J	
R950	VE-30012657	SMD R	1/16W 1K J	
R951	VE-30012657	SMD R	1/16W 1K J	
R952	VE-30012657	SMD R	1/16W 1K J	
R953	VE-30000466	CF R	1/4W 1K J	
R955	VE-30012657	SMD R	1/16W 1K J	
R956	VE-30012210	SMD R	1/16W 100R J	
R957	VE-30012655	SMD R	1/16W 180R J	
R958	VE-30014022	SMD R	1/16W 47R J	
R959	VE-30000466	CF R	1/4W 1K J	
R960	VE-30000471	CF R	1/4W 10K J	
R961	VE-30000718	CF R	1/4W 4.7K J	
R964	VE-30012641	SMD R	1/16W 10K J	
R965	VE-30012657	SMD R	1/16W 1K J	
R966	VE-30012641	SMD R	1/16W 10K J	
R967	VE-30012650	SMD R	1/16W 15K J	
R968	VE-30000692	SMD R	1/10W 3.9K J	
S133	VE-30000575	SMD R	1/10W 2K J	
VR117	VE-30001041	ADJ.R	1/6W 1K M VER	
VR401	VE-30001058	ADJ.R	1/6W 22K VER (OTO)	

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C100	VE-3000098	MKT CAP.	3.3NF 63V J	
C101	VE-30000371	EL CAP.	12UF 50V M	
C102	VE-30000294	SMD CAP.	100NF 50V K	
C103	VE-30000294	SMD CAP.	100NF 50V K	
C104	VE-30012323	MKT CAP.	1NF 100V J WIMA FK12	
C105	VE-30000384	SMD CAP.	1NF 50V K R	
C106	VE-30000332	SMD CAP.	4.7NF 50V K	
C107	VE-30000263	SMD CAP.	56PF 50V J CH	
C108	VE-30000123	PP CAP.	33NF 630V K	
C109	VE-30000159	MKP CAP.	4.7NF 1.6KV J	
C110	VE-30009208	CER CAP.	470PF 1KV K (PULSE)	
C111	VE-30000131	MKP CAP.	100NF 250V J	
CAPACITOR				
▲ C112	VE-30000094	MKT CAP.	220NF AC275V M	
▲ C114	VE-30000353	EL CAP.	100UF 25V M	
▲ C115	VE-30007858	MKT CAP.	470NF AC275V M	
▲ C118	VE-30007755	MKT CAP.	680NF AC275V M	
C119	VE-30007754	MKT CAP.	1UF 400V	
C120	VE-30007753	MKT CAP.	1NF 1KV	
C121	VE-30013690	EL CAP.	220UF 450V M 105°	
▲ C122	VE-30000447	CER CAP.	4.7NF 4KV M E	
C124	VE-30000315	SMD CAP.	220NF 25V Z	
C125	VE-30000315	SMD CAP.	1NF 1KV K (PULSE)	
C130	VE-30007708	CER CAP.	100UF 250V	
C131	VE-30006909	EL CAP.	470UF 35V (H/R 1150MA)	
C132	VE-30007750	EL CAP.	470UF 25V M	
C133	VE-30000409	EL CAP.	470UF 35V (H/R 1150MA)	
C134	VE-30007750	EL CAP.	1000UF 35V M	
C135	VE-30007748	EL CAP.	1000UF 35V M	
C136	VE-30007748	EL CAP.	1000UF 35V M	
C137	VE-30000284	SMD CAP.	1NF 50V K R	
C138	VE-30000224	SMD CAP.	220PF 50V J	
C139	VE-30000284	SMD CAP.	1NF 50V K R	
C140	VE-30000360	EL CAP.	1000UF 25V M	
C141	VE-30000352	EL CAP.	1000UF 16V M	
C142	VE-30000294	SMD CAP.	100NF 50V K	
C143	VE-30000294	SMD CAP.	100NF 50V K	
C144	VE-30000352	EL CAP.	100UF 16V M	
C145	VE-30000309	SMD CAP.	2.2NF 50V K R	
C146	VE-30000359	EL CAP.	1000UF 16V M	
C147	VE-30000359	EL CAP.	1000UF 16V M	
C148	VE-30000294	SMD CAP.	100NF 50V K	
C149	VE-30000294	SMD CAP.	100NF 50V K	
C150	VE-30000352	EL CAP.	100NF 16V M	
C151	VE-30000284	SMD CAP.	1NF 50V K R	
C160	VE-30007081	EL CAP.	4.7UF 50V M (NPL)	
C161	VE-30007308	CER CAP.	220PF 1KV K (PULSE)	
C162	VE-30007308	CER CAP.	220PF 1KV K (PULSE)	
C163	VE-30009208	EL CAP.	470PF 1KV K (PULSE)	
C164	VE-30016654	SMD CAP.	100NF 16V K R	
C165	VE-30000355	EL CAP.	100UF 50V M	
C166	VE-30000355	EL CAP.	470PF 1KV K (PULSE)	
C167	VE-30009208	CER CAP.	470PF 1KV K (PULSE)	
C168	VE-30000294	SMD CAP.	100NF 50V K	
C169	VE-30000352	EL CAP.	100UF 16V M	
C170	VE-30000352	EL CAP.	100UF 16V M	
C171	VE-30000352	EL CAP.	100UF 16V M	
C172	VE-30016654	SMD CAP.	100NF 16V K R	
C173	VE-30000315	SMD CAP.	220NF 25V Z	
C201	VE-30000400	EL CAP.	47UF 50V M	
C202	VE-30000106	MKT CAP.	47NF 100V J	
C203	VE-30000099	MKT CAP.	33NF 63V J	
C204	VE-30000345	EL CAP.	10UF 50V M	
C206	VE-30000315	SMD CAP.	220NF 25V Z	
C207	VE-30000362	EL CAP.	1UF 50V M	
C208	VE-30000415	EL CAP.	4.7UF 250V M	
C209	VE-30000224	SMD CAP.	220PF 50V J	
C210	VE-30000149	MKT CAP.	2.7NF 2KV 3.3.5	
▲ C211	VE-30000179	MKT CAP.	9.1NF 1600V 3.3.5	
▲ C212	VE-30000137	MKT CAP.	15NF 630V J	
▲ C213	VE-30000215	MKT CAP.	1.2UF 250V	
C214	VE-30000415	EL CAP.	4.7UF 250V M	
C215	VE-30000167	MKT CAP.	560NF 250V J	
C216	VE-30000406	EL CAP.	100PF 1KV M	
C222	VE-30000431	CER CAP.	100UF 350V M	
C223	VE-30000351	EL CAP.	1000UF 16V M	
C225	VE-30000359	EL CAP.	1000UF 16V M	
C226	VE-30000356	EL CAP.	1000UF 63M M	
C232	VE-30000225	CER CAP.	220PF 50V J SL	
C240	VE-30000354	EL CAP.	100UF 35V M	
C250	VE-30000304	SMD CAP.	1.8NF 50V K R	
C251	VE-30000359	EL CAP.	1000UF 16V M	
C252	VE-30000289	SMD CAP.	10NF 50V K R	
C253	VE-30000294	SMD CAP.	100NF 50V K	
C254	VE-30000360	EL CAP.	1000UF 25V M	
C255	VE-30000294	SMD CAP.	100NF 50V K	
C256	VE-30000078	MKT CAP.	1UF 100V M	
C257	VE-30000304	SMD CAP.	1.8NF 50V K R	
C258	VE-30000322	SMD CAP.	3.3NF 50V K	
C305	VE-30000294	SMD CAP.	100NF 50V K	
C313	VE-30000189	SMD CAP.	100PF 50V J	
C321	VE-30000352	EL CAP.	100UF 16V M	
C322	VE-30000352	EL CAP.	100UF 16V M	
C324	VE-30000294	SMD CAP.	100NF 50V K	
C333	VE-30000294	SMD CAP.	100NF 50V K	
C402	VE-30000345	EL CAP.	10UF 50V M	
C403	VE-30000393	EL CAP.	3.3UF 50V M	
C404	VE-30000284	SMD CAP.	1NF 50V K R	
C405	VE-30000284	SMD CAP.	1NF 50V K R	
C406	VE-30000220	SMD CAP.	22PF 50V J	
C407	VE-30000284	SMD CAP.	1NF 50V K R	
C408	VE-30000371	EL CAP.	22UF 50V M	
C409	VE-30000294	SMD CAP.	100NF 50V K	
C410	VE-30000294	SMD CAP.	100NF 50V K	

[AV28BH7EPS , AV28BH7EPB]

△ Symbol No.	Part No.	Part Name	Description
--------------	----------	-----------	-------------

CAPACITOR

C411	VE-30000109	MKT CAP.	470NF 63V J
C412	VE-30000384	EL CAP.	2.2UF 50V M
C413	VE-30000294	SMD CAP.	100NF 50V K
C414	VE-30000294	SMD CAP.	100NF 50V K
C417	VE-30000294	SMD CAP.	100NF 50V K
C418	VE-30000294	SMD CAP.	100NF 50V K
C419	VE-30000294	SMD CAP.	100NF 50V K
C424	VE-30000387	EL CAP.	33UF 50V M
C427	VE-30000294	SMD CAP.	100NF 50V K
C428	VE-30000294	SMD CAP.	100NF 50V K
C430	VE-30000294	SMD CAP.	100NF 50V K
C440	VE-30000355	EL CAP.	100UF 50V M
C441	VE-30000220	SMD CAP.	22PF 50V J
C442	VE-30000294	SMD CAP.	100NF 50V K
C443	VE-30013411	SMD CAP.	180PF 50V J
C450	VE-30000345	EL CAP.	10UF 50V M
C451	VE-30000294	SMD CAP.	100NF 50V K
C453	VE-30000355	EL CAP.	100UF 50V M
C454	VE-30000294	SMD CAP.	100NF 50V K
C456	VE-30000352	EL CAP.	100UF 16V M
C457	VE-30000294	SMD CAP.	100NF 50V K
C468	VE-30000294	SMD CAP.	100NF 50V K
C478	VE-30000294	SMD CAP.	100NF 50V K
C479	VE-30000362	EL CAP.	1UF 50V M
C491	VE-30000400	EL CAP.	47UF 50V M
C492	VE-30000294	SMD CAP.	100NF 50V K
C494	VE-30000362	EL CAP.	1UF 50V M
C496	VE-30000413	EL CAP.	4.7UF 50V M
C497	VE-30000294	SMD CAP.	100NF 50V K
C498	VE-30000294	SMD CAP.	100NF 50V K
C499	VE-30000362	EL CAP.	1UF 50V M
C500	VE-30000352	EL CAP.	100UF 16V M
C505	VE-30000294	SMD CAP.	100NF 50V K
C506	VE-30000345	EL CAP.	100UF 50V M
C509	VE-30000186	SMD CAP.	10PF 50V D COG
C510	VE-30000186	SMD CAP.	10PF 50V D COG
C511	VE-30000341	SMD CAP.	68NF 50V K
C610	VE-30000074	MKT CAP.	100NF 63V J
C801	VE-30000362	EL CAP.	1UF 50V M
C802	VE-30000362	EL CAP.	1UF 50V M
C804	VE-30000409	EL CAP.	470UF 25V M
C805	VE-30000294	SMD CAP.	100NF 50V K
C806	VE-30000409	EL CAP.	470UF 25V M
C807	VE-30000294	SMD CAP.	100NF 50V K
C808	VE-30000074	MKT CAP.	100NF 63V J
C809	VE-30000074	MKT CAP.	100NF 63V J
C818	VE-30000284	SMD CAP.	INF 50V K R
C820	VE-30000284	SMD CAP.	INF 50V K R
C821	VE-30000309	SMD CAP.	2.2NF 50V K R
C822	VE-30000309	SMD CAP.	2.2NF 50V K R
C823	VE-30000345	EL CAP.	10UF 50V M
C900	VE-30000371	EL CAP.	22UF 50V M
C901	VE-30016654	SMD CAP.	100NF 16V K R
C902	VE-30016654	SMD CAP.	100NF 16V K R
C903	VE-30016654	SMD CAP.	100NF 16V K R
C904	VE-30000074	MKT CAP.	100NF 63V J
C905	VE-30000371	EL CAP.	22UF 50V M
C906	VE-30016654	SMD CAP.	100NF 16V K R
C907	VE-30000074	MKT CAP.	100NF 63V J
C908	VE-30016654	SMD CAP.	100NF 16V K R
C909	VE-30016654	SMD CAP.	100NF 16V K R
C910	VE-30016654	SMD CAP.	100NF 16V K R
C911	VE-30000352	EL CAP.	100UF 16V M
C912	VE-30012569	SMD CAP.	33PF 50V J
C913	VE-30012569	SMD CAP.	33PF 50V J
C914	VE-30000371	EL CAP.	33UF 50V M
C915	VE-30016654	SMD CAP.	100NF 16V K R
C916	VE-30016654	SMD CAP.	100NF 16V K R
C917	VE-30016654	SMD CAP.	100NF 16V K R
C918	VE-30016654	SMD CAP.	100NF 16V K R
C919	VE-30000375	EL CAP.	22QUF 16V M
C920	VE-30000384	EL CAP.	2.2UF 50V M
C921	VE-30016654	SMD CAP.	100NF 16V K R
C926	VE-30016654	SMD CAP.	100NF 16V K R
C937	VE-30016654	SMD CAP.	100NF 16V K R
C930	VE-30000345	EL CAP.	10UF 50V M
C931	VE-30000243	CER CAP.	330PF 50V J CH
C932	VE-30016654	SMD CAP.	100NF 16V K R
C933	VE-30000294	SMD CAP.	100NF 50V K
C934	VE-30000071	MKT CAP.	10NF 63V J
C935	VE-30000071	MKT CAP.	10NF 63V J

△ Symbol No.	Part No.	Part Name	Description
--------------	----------	-----------	-------------

COIL

L102	VE-30007775	PFC COIL	1MH 1KHZ 2A
L201	VE-30007771	FIXED COIL	100UH
L202	VE-30007757	EW INJECTION COIL	6MHZ
L203	VE-30007770	FILTER COIL	1MHZ
L204	VE-30012271	LINEARITY COIL	4.3UH
L205	VE-30007756	BRIDGE COIL	150UH 32KHZ
L304	VE-30001992	FIXED COIL	10UH
L401	VE-30001986	FIXED COIL	3.3UH
L403	VE-30001979	FIXED COIL	1UH
L405	VE-30001987	FIXED COIL	4.7UH
L420	VE-30001996	FIXED COIL	22UH
L421	VE-30001992	FIXED COIL	10UH
L422	VE-30001994	FIXED COIL	22UH J AXIAL
L423	VE-30001994	FIXED COIL	22UH J AXIAL
L426	VE-30001994	FIXED COIL	22UH J AXIAL
L427	VE-30001987	FIXED COIL	4.7UH
L428	VE-30001987	FIXED COIL	4.7UH
L429	VE-30001987	FIXED COIL	4.7UH
L430	VE-30001987	FIXED COIL	4.7UH
L900	VE-30001992	FIXED COIL	10UH
L901	VE-30001992	FIXED COIL	10UH
L902	VE-30001992	FIXED COIL	10UH
L903	VE-30001992	FIXED COIL	10UH
L904	VE-30001987	FIXED COIL	4.7UH
VL401	VE-30002036	VIF ADJ COIL	38.9MHZ

DIODE

D101	VE-30001285	SMD DIODE	
D102	VE-30001291	DIODE	1A/800V 30A
D103	VE-30007768	DIODE	5A/600V 55A
D104	VE-30007768	DIODE	5A/600V 55A
D105	VE-30007768	DIODE	5A/600V 55A
D106	VE-30007758	BRIDGE DIODE	4A/1000V 150A
D108	VE-30001318	DIODE	1A/800V 20A
D109	VE-30009699	ZENER DIODE	12V
D110	VE-30001301	DIODE	2.3A/800V 45-150A
D111	VE-30001299	DIODE	3A/400V 150A
D112	VE-30001302	DIODE	8A/200V 80A
D113	VE-30001302	DIODE	8A/200V 80A
D114	VE-30001302	DIODE	8A/200V 80A
D115	VE-30001285	SMD DIODE	
D116	VE-30007760	SMD ZENER DIODE	
D117	VE-30001285	SMD DIODE	
D118	VE-30007760	SMD ZENER DIODE	
D119	VE-30001284	DIODE	0.15A/100V 0.5A
D120	VE-30001291	DIODE	1A/800V 30A
D121	VE-30001318	DIODE	1A/800V 20A
D122	VE-30001318	DIODE	1A/800V 20A
D123	VE-30001285	SMD DIODE	
D126	VE-30001284	DIODE	0.15A/100V 0.5A
D127	VE-30001284	DIODE	0.15A/100V 0.5A
D128	VE-30001284	DIODE	0.15A/100V 0.5A
D201	VE-30001291	DIODE	1A/800V 30A
D202	VE-30001285	SMD DIODE	
D203	VE-30007760	SMD ZENER DIODE	
D205	VE-30007763	SMD ZENER DIODE	
D206	VE-30007678	DIODE	6A/1500V 100A
D207	VE-30007768	DIODE	5A/600V 55A
D208	VE-30001291	DIODE	1A/800V 30A
D209	VE-30001291	DIODE	1A/800V 30A
D210	VE-30001299	DIODE	3A/400V 150A
D211	VE-30001299	DIODE	3A/400V 150A
D212	VE-30001291	DIODE	1A/800V 30A
D213	VE-30001291	DIODE	1A/800V 30A
D214	VE-30007763	SMD ZENER DIODE	
D215	VE-30007763	SMD ZENER DIODE	
D216	VE-30001285	SMD DIODE	
D218	VE-30001291	DIODE	1A/800V 30A
D219	VE-30001291	DIODE	1A/800V 30A
D220	VE-30001284	DIODE	0.15A/100V 0.5A
D221	VE-30001284	DIODE	0.15A/100V 0.5A
D222	VE-30001284	DIODE	0.15A/100V 0.5A
D223	VE-30001285	SMD DIODE	
D224	VE-30001285	SMD DIODE	
D225	VE-30001318	DIODE	1A/800V 20A
D226	VE-30007760	SMD ZENER DIODE	
D227	VE-30001373	ZPD ZENER DIODE	10V
D401	VE-30001285	SMD DIODE	
D402	VE-30001285	SMD DIODE	
D403	VE-30001285	SMD DIODE	
D900	VE-30012412	SMD ZENER DIODE	2.4V

TRANSISTOR

Q101	VE-30007801	TRANSISTOR
Q103	VE-30007802	TRANSISTOR

△ TR101	VE-30016819	SMPS TRANSF
TR201	VE-30006743	HORIZONTAL DRIVER TRANSF.
TR202	VE-30016922	FB TRANSF.

[AV28BH7EPS , AV28BH7EPB]

△ Symbol No.	Part No.	Part Name	Description
--------------	----------	-----------	-------------

TRANSISTOR

0104	VE-30007798	SMD TRANSISTOR	
0105	VE-30007798	SMD TRANSISTOR	
0106	VE-30007802	TRANSISTOR	
0107	VE-30007798	SMD TRANSISTOR	
0108	VE-30007798	SMD TRANSISTOR	
0109	VE-30001457	SMD TRANSISTOR	
0110	VE-30001457	SMD TRANSISTOR	
0112	VE-30001454	TRANSISTOR	
0113	VE-30001428	TRANSISTOR	
0201	VE-30007802	TRANSISTOR	
0202	VE-30016586	TRANSISTOR	H.OUT
0203	VE-30001458	SMD TRANSISTOR	
0204	VE-30001458	SMD TRANSISTOR	
0205	VE-30007799	TRANSISTOR	
0206	VE-30001457	SMD TRANSISTOR	
0207	VE-30001457	SMD TRANSISTOR	
0208	VE-30001455	TRANSISTOR	
0401	VE-30001457	SMD TRANSISTOR	
0403	VE-30001457	SMD TRANSISTOR	
0405	VE-30001457	SMD TRANSISTOR	
0406	VE-30001457	SMD TRANSISTOR	
0408	VE-30007800	TRANSISTOR	
0415	VE-30001457	SMD TRANSISTOR	
0801	VE-30001457	SMD TRANSISTOR	
0802	VE-30001457	SMD TRANSISTOR	
0900	VE-30001458	SMD TRANSISTOR	
0901	VE-30001457	SMD TRANSISTOR	
0902	VE-30001457	SMD TRANSISTOR	
0903	VE-30001457	SMD TRANSISTOR	
0904	VE-30001457	SMD TRANSISTOR	
0905	VE-30001457	SMD TRANSISTOR	
0906	VE-30001457	SMD TRANSISTOR	
0907	VE-30001457	SMD TRANSISTOR	
0908	VE-30001457	SMD TRANSISTOR	
0909	VE-30001458	SMD TRANSISTOR	
0910	VE-30001457	SMD TRANSISTOR	
0911	VE-30001457	SMD TRANSISTOR	

I C

IC101	VE-30007442	I.C.	
IC102	VE-30015087	I.C.	
IC103	VE-30001506	I.C.	
IC104	VE-30007444	I.C.	
IC105	VE-30001500	I.C.	
IC106	VE-30001668	I.C.	
IC201	VE-30007793	I.C.	
IC202	VE-30001506	I.C.	
IC302	VE-20105614	I.C. (MEMORY)	24C32 057J411126112
IC304	VE-20117589	I.C. (MICOM)	41-AK41J G055
IC401	VE-30001494	I.C.	
IC802	VE-30007794	I.C.	
IC900	VE-30013571	I.C.	

OTHERS

△ F101	VE-30001732	FUSE	3.15A
△ F102	VE-30009037	FUSE	6.3A
△ F103	VE-30009037	FUSE	6.3A
J412	VE-30001265	NTC MONITOR	
L101	VE-30006712	FERRITE BEAD	
△ L103	VE-30006744	LINE FILTER	
L104	VE-30006744	LINE FILTER	
L106	VE-30006712	FERRITE BEAD	
L107	VE-30001960	FERRITE CORE	
L108	VE-30001960	FERRITE CORE	
L109	VE-30001960	FERRITE CORE	
L206	VE-30006712	FERRITE BEAD	
L207	VE-30006712	FERRITE BEAD	
L425	VE-30001971	SMD FERRITE	
L801	VE-30002170	FERRITE CORE	
L802	VE-30002170	FERRITE CORE	
△ R109	VE-30001270	PTC	9 OHM
RL2	VE-30002183	RELAY	
T401	VE-30001724	SER FILTER	5.5MHZ
TU401	VE-30009537	TUNER	
X900	VE-30006662	XTAL	6MHZ
Z401	VE-30001706	SAW FILTER	
Z403	VE-30001692	SAW FILTER	

**MULTI SOUND P.W. BOARD ASS'Y
(VE-20085395)**

Refer to PARTS LIST in page 8 for this P.W. board.

FEATURE BOX P.W. BOARD ASS'Y (VE-20055386)

Refer to PARTS LIST in page 9 for this P.W. board.

CRT SOCKET P.W. BOARD ASS'Y (VE-20086295)

Refer to PARTS LIST in page 11 for this P.W. board.

**FRONT CONTROL P.W. BOARD ASS'Y
(VE-20082481)**

Refer to PARTS LIST in page 12 for this P.W. board.

**FRONT AV + HEADPHONE JACK P.W. BOARD
ASS'Y (VE-20083091)**

Refer to PARTS LIST in page 12 for this P.W. board.

PRINTED WIRING BOARD PARTS LIST

[AV28BH7EES , AV28BH7EEB]

MAIN P.W. BOARD ASS'Y (VE-20105600)

△	Symbol No.	Part No.	Part Name	Description	△	Symbol No.	Part No.	Part Name	Description
RESISTOR									
R101	VE-30000668	SMD R		1/10W 33K J	R256	VE-30001100	MO R		1W 150R J
R102	VE-30007782	MF R		1/4W 3.9M F	R257	VE-30001173	MO R		1W 0.47R J
R103	VE-30000855	MF R		1/4W 1M F	R260	VE-30000778	SMD R		1/10W 6.8K J
R104	VE-30000668	SMD R		1/10W 33K J	R261	VE-30000778	SMD R		1/10W 6.8K J
R105	VE-30000452	CF R		1/4W 10R J	R262	VE-30001237	FUSE R		1/2W 3.3R J
R106	VE-30000664	SMD R		1/10W 3.3K J	R264	VE-30001077	MO R		2W 10R J
R107	VE-30007019	SMD R		1/10W 10K J	R270	VE-30000541	CF R		1/4W 1.5M J
R108	VE-30007784	MO R	5W 33K J (RADIAL)		R271	VE-30000744	CF R		1/4W 560R J
R116	VE-30001171	MO R		2W 4.7K J	R272	VE-30000475	SMD R		1/10W 47K J
R117	VE-30001257	MG R		1/2W 4.7M J	R280	VE-30000480	SMD R		1/10W 100K J
R118	VE-30009036	FUSE R		1/2W 0.1R J	R281	VE-30000480	SMD R		1/10W 100K J
R119	VE-30009036	FUSE R		1/2W 0.1R J	R318	VE-30000469	SMD R		1/10W 1K J
R120	VE-30000814	SMD R		1/10W 820R J	R322	VE-30000594	CF R		1/4W 22K J
R122	VE-30000469	SMD R		1/10W 1K J	R323	VE-30000459	CF R		1/4W 100R J
R123	VE-30000469	SMD R		1/10W 1K J	R324	VE-30000464	SMD R		1/10W 100R J
R124	VE-30000480	SMD R		1/10W 100K J	R327	VE-30000464	SMD R		1/10W 100R J
R125	VE-30000927	MF R		1/4W 220K J	R360	VE-30000659	SMD R		1/10W 330R J
R126	VE-30000664	SMD R		1/10W 3.3K J	R361	VE-30000659	SMD R		1/10W 330R J
R127	VE-30000469	SMD R		1/10W 1K J	R362	VE-30000659	SMD R		1/10W 330R J
R128	VE-30000536	CF R		1/4W 150K J	R363	VE-30000659	SMD R		1/10W 330R J
R129	VE-30007019	SMD R		1/10W 10K F	R364	VE-30000659	SMD R		1/10W 330R J
R130	VE-30000721	SMD R		1/10W 4.7K J	R365	VE-30000659	SMD R		1/10W 330R J
R134	VE-30000469	SMD R		1/10W 1K J	R366	VE-30000659	SMD R		1/10W 330R J
R135	VE-30007790	SMD R		1/10W 4.3K F	R367	VE-30000659	SMD R		1/10W 330R J
R136	VE-30000774	SMD R		1/10W 680R J	R368	VE-30000659	SMD R		1/10W 330R J
R137	VE-30007021	SMD R		1/10W 1K F	R369	VE-30000659	SMD R		1/10W 330R J
R138	VE-30007786	SMD R		1/10W 2.55K F	R370	VE-30000659	SMD R		1/10W 330R J
R139	VE-30000774	SMD R		1/10W 680R J	R371	VE-30000659	SMD R		1/10W 330R J
R140	VE-30000459	CF R		1/4W 100R J	R372	VE-30000659	SMD R		1/10W 330R J
R141	VE-30000475	SMD R		1/10W 10K J	R373	VE-30000659	SMD R		1/10W 330R J
R142	VE-30000475	SMD R		1/10W 10K J	R374	VE-30000659	SMD R		1/10W 330R J
R143	VE-30007021	SMD R		1/10W 1K F	R375	VE-30000659	SMD R		1/10W 330R J
R144	VE-30007788	SMD R		1/10W 2.7K F	R376	VE-30000659	SMD R		1/10W 330R J
R145	VE-30000732	SMD R		1/10W 470K J	R378	VE-30000659	SMD R		1/10W 330R J
R146	VE-30000469	FUSE R		1/10W 1K J	R379	VE-30000659	SMD R		1/10W 330R J
R148	VE-30014023	FUSE R	1/2W 0.1R J VISHAY		R380	VE-30000659	SMD R		1/10W 330R J
R149	VE-30007204	FUSE R		1/2W 1.5M F	R381	VE-30000659	SMD R		1/10W 330R J
R150	VE-30007783	FUSE R		1/4W 2.3R J	R382	VE-30000659	SMD R		1/10W 330R J
R151	VE-30014023	FUSE R	1/2W 0.1R J VISHAY		R383	VE-30000659	SMD R		1/10W 330R J
R152	VE-30000659	SMD R		1/10W 330R J	R384	VE-30000659	SMD R		1/10W 330R J
R153	VE-30012649	SMD R		1/16W 150R J	R385	VE-30000659	SMD R		1/10W 330R J
R154	VE-30012984	SMD R		1/16W 91R J	R397	VE-30000659	SMD R		1/10W 330R J
R155	VE-30000712	CF R		1/4W 470R J	R398	VE-30000659	SMD R		1/10W 330R J
R156	VE-30001089	MO R		2W 1R J	R411	VE-30000747	SMD R		1/10W 560R J
R157	VE-30000534	SMD R		1/10W 15K J	R412	VE-30000721	SMD R		1/10W 4.7K J
R158	VE-30000475	SMD R		1/10W 10K J	R413	VE-30000475	SMD R		1/10W 10K J
R159	VE-30000480	SMD R		1/10W 100K J	R414	VE-30000469	SMD R		1/10W 1K J
R160	VE-30006923	SMD R		1/10W 4.3K J	R415	VE-30000517	SMD R		1/10W 15R J
R202	VE-30007779	MO R	5W 47R J (RADIAL)		R416	VE-30000717	SMD R		1/10W 47R J
R203	VE-30000631	SMD R		1/10W 2.7K J	R421	VE-30000563	SMD R		1/10W 1.8K J
R205	VE-30017136	MO R		1W 0.56R J	R422	VE-30000464	SMD R		1/10W 100R J
R206	VE-30001080	MO R		2W 100R J	R424	VE-30007021	SMD R		1/10W 1K F
R210	VE-30000583	CF R		1/4W 220R J	R425	VE-30000797	SMD R		1/10W 75R J
R211	VE-30000721	SMD R		1/10W 4.7K J	R428	VE-30000475	SMD R		1/10W 10K J
R212	VE-30000593	SMD R		1/10W 2.2K J	R429	VE-30000475	SMD R		1/10W 10K J
R213	VE-30000593	SMD R		1/10W 2.2K J	R440	VE-30000534	SMD R		1/10W 15K J
R214	VE-30000593	SMD R		1/10W 2.2K J	R441	VE-30000818	SMD R		1/10W 8.2K J
R215	VE-30000721	SMD R		1/10W 4.7K J	R445	VE-30000814	SMD R		1/10W 820R J
R216	VE-30000631	SMD R		1/10W 2.7K J	R475	VE-30000524	SMD R		1/10W 150R J
R217	VE-30000593	SMD R		1/10W 2.2K J	R480	VE-30000718	CF R		1/4W 4.7K J
R218	VE-30000480	SMD R		1/10W 100K J	R490	VE-30000466	CF R		1/4W 1K J
R220	VE-30000590	CF R		1/4W 2.2K J	R492	VE-30000503	SMD R		1/10W 12K J
R225	VE-30001086	MO R		2W 10K J	R506	VE-30012695	SMD R		1/16W 470R J
R226	VE-30001168	MO R		2W 470R J	R509	VE-30000797	SMD R		1/10W 75R J
R227	VE-30000469	SMD R		1/10W 1K J	R510	VE-30007021	SMD R		1/10W 1K F
R228	VE-30000475	SMD R		1/10W 10K J	R511	VE-30000464	SMD R		1/10W 100R J
R229	VE-30000727	SMD R		1/10W 47K J	R512	VE-30000464	SMD R		1/10W 100R J
R230	VE-30000902	MF R		1/4W 1.8K F	R513	VE-30000457	SMD R		1/10W 10R J
R231	VE-30001229	FUSE R		1W 2.2R J	R518	VE-30000735	SMD R		1/10W 4.7R J
R232	VE-30001027	MF R		1/4W 82K J	R614	VE-30000797	SMD R		1/10W 75R J
R233	VE-30001244	FUSE R	1/2W 0.47R J		R801	VE-30000718	CF R		1/4W 4.7K J
R234	VE-30000936	FUSE R	1/2W 0.1R J		R802	VE-30000718	CF R		1/4W 4.7K J
R235	VE-30000668	SMD R		1/10W 33K J	R803	VE-30000628	CF R		1/4W 2.7K J
R236	VE-30000718	CF R		1/4W 4.7K J	R804	VE-30000475	SMD R		1/10W 10K J
R237	VE-30001244	FUSE R	1/2W 0.47R J		R805	VE-30000534	SMD R		1/10W 15K J
R238	VE-30000729	CF R	1/4W 470K J		R806	VE-30000531	CF R		1/4W 15K J
R239	VE-30001215	FUSE R		1W 1R J	R807	VE-30000567	SMD R		1/10W 18K J
R240	VE-30000469	SMD R		1/10W 1K J	R808	VE-30000734	CF R		1/4W 4.7R J
R241	VE-30000818	SMD R		1/10W 8.2K J	R809	VE-30000717	SMD R		1/10W 470R J
R245	VE-30000784	CF R		1/4W 680K J	R810	VE-30000564	CF R		1/4W 18K J
R245	VE-30000466	CF R		1/4W 1K J	R811	VE-30000717	SMD R		1/10W 470R J
R246	VE-30001027	MF R		1/4W 82K J	R812	VE-30000734	CF R		1/4W 4.7R J
R250	VE-30000477	CF R		1/4W 100K J	R813	VE-30000475	SMD R		1/10W 10K J
R251	VE-30000477	CF R		1/4W 100K J	R819	VE-30000734	CF R		1/4W 4.7R J
R252	VE-30000789	SMD R		1/10W 27K J	R820	VE-30000734	CF R		1/4W 4.7R J
R254	VE-30000636	SMD R		1/10W 27K J	R900	VE-30012641	SMD R		1/16W 10K J
R255	VE-30001134	MO R		2W 2.2R J	R901	VE-30012641	SMD R		1/16W 10K J

[AV28BH7EES , AV28BH7EEB]

△	Symbol No.	Part No.	Part Name	Description
RESISTOR				
R902	VE-30012641	SMD R	1/16W 10K J	
R903	VE-30000718	CF R	1/4W 4.7K J	
R904	VE-30000718	CF R	1/4W 4.7K J	
R905	VE-30000723	CF R	1/4W 47K J	
R906	VE-30012696	SMD R	1/16W 47K J	
R907	VE-30012679	SMD R	1/16W 3.9K J	
R908	VE-30012679	SMD R	1/16W 3.9K J	
R909	VE-30000531	CF R	1/4W 15K J	
R910	VE-30000531	CF R	1/4W 15K J	
R911	VE-30012641	SMD R	1/16W 10K J	
R912	VE-30000471	CF R	1/4W 10K J	
R913	VE-30012641	SMD R	1/16W 10K J	
R914	VE-30000471	CF R	1/4W 10K J	
R915	VE-30000471	CF R	1/4W 10K J	
R916	VE-30012695	SMD R	1/16W 470R J	
R917	VE-30012687	SMD R	1/16W 55R J	
R918	VE-30012692	SMD R	1/16W 4.7K J	
R919	VE-30012657	SMD R	1/16W 1K J	
R920	VE-30012657	SMD R	1/16W 1K J	
R921	VE-30012657	SMD R	1/16W 1K J	
R922	VE-30012657	SMD R	1/16W 1K J	
R923	VE-30012657	SMD R	1/16W 1K J	
R924	VE-30012696	SMD R	1/16W 47K J	
R925	VE-30012696	SMD R	1/16W 47K J	
R926	VE-30012696	SMD R	1/16W 47K J	
R927	VE-30012696	SMD R	1/16W 47K J	
R928	VE-30012310	SMD R	1/16W 100R J	
R929	VE-30012310	SMD R	1/16W 100R J	
R930	VE-30012641	SMD R	1/16W 10K J	
R931	VE-30012641	SMD R	1/16W 10K J	
R932	VE-30012641	SMD R	1/16W 10K J	
R933	VE-30000718	CF R	1/4W 4.7K J	
R934	VE-30012692	SMD R	1/16W 4.7K J	
R935	VE-30012662	SMD R	1/16W 2.7K J	
R936	VE-30000718	CF R	1/4W 4.7K J	
R937	VE-30000459	CF R	1/4W 100R J	
R938	VE-30012509	SMD R	1/16W 100K J	
R939	VE-30012692	SMD R	1/16W 4.7K J	
R940	VE-30000500	CF R	1/4W 12K J	
R941	VE-30000588	SMD R	1/10W 220R J	
R942	VE-30000588	SMD R	1/10W 220R J	
R943	VE-30000471	CF R	1/4W 10K J	
R944	VE-30012641	SMD R	1/16W 10K J	
R945	VE-30000471	CF R	1/4W 10K J	
R946	VE-30012657	SMD R	1/16W 1K J	
R950	VE-30012657	SMD R	1/16W 1K J	
R951	VE-30012657	SMD R	1/16W 1K J	
R952	VE-30012657	SMD R	1/16W 1K J	
R953	VE-30000466	CF R	1/4W 1K J	
R955	VE-30012657	SMD R	1/16W 1K J	
R956	VE-30012310	SMD R	1/16W 100R J	
R957	VE-30012655	SMD R	1/16W 180R J	
R958	VE-30014022	SMD R	1/16W 47R J	
R959	VE-30000466	CF R	1/4W 1K J	
R960	VE-30000471	CF R	1/4W 10K J	
R961	VE-30000718	CF R	1/4W 4.7K J	
R964	VE-30012641	SMD R	1/16W 10K J	
R965	VE-30012657	SMD R	1/16W 1K J	
R966	VE-30012641	SMD R	1/16W 10K J	
R967	VE-30012650	SMD R	1/16W 15K J	
R968	VE-30000692	SMD R	1/10W 3.9K J	
S133	VE-30000575	SMD R	1/10W 2K J	
VR127	VE-30001041	ADJ.R	1/6W 1K M VER	

△	Symbol No.	Part No.	Part Name	Description
CAPACITOR				
C100	VE-30000098	MKT CAP.	3.3NF 63V J	
C101	VE-30000371	EL CAP.	22UF 50V M	
C102	VE-30000294	SMD CAP.	100NF 50V K	
C103	VE-30000294	SMD CAP.	100NF 50V K	
C104	VE-30012323	MKT CAP.	1NF 100V J WIMA FK12	
C105	VE-30000284	SMD CAP.	1NF 50V K R	
C106	VE-30000332	SMD CAP.	4.7NF 50V K	
C107	VE-30000263	SMD CAP.	56PF 50V J CH	
C108	VE-30000123	PP CAP.	33NF 630V K	
C109	VE-30000159	MKT CAP.	4.7NF 1.6KV J	
C110	VE-30009208	CER CAP.	470PF 1KV J (PULSE)	
C111	VE-30000131	MKT CAP.	100NF 250V J	
C112	VE-30000094	MKT CAP.	220NF AC275V M	
C114	VE-30000353	EL CAP.	100UF 25V M	
C115	VE-30007858	MKT CAP.	470NF AC275V M	
C118	VE-30007755	MKT CAP.	680NF AC275V M	
C119	VE-30007754	MKT CAP.	1UF 400V	
C120	VE-30007753	MKT CAP.	1NF 1KV	
C121	VE-30013690	EL CAP.	220UF 450V M 105°	
C122	VE-30000447	CER CAP.	4.7NF 4KV M E	
C124	VE-30000315	SMD CAP.	220NF 25V Z	
C125	VE-30000315	SMD CAP.	220NF 25V Z	
C130	VE-30007708	CER CAP.	1NF 1KV K (PULSE)	
C131	VE-30006909	EL CAP.	100UF M 250V	
C132	VE-30007750	EL CAP.	470UF 25V M	
C133	VE-30000409	EL CAP.	470UF 35V (H/R 1150MA)	
C134	VE-30007750	EL CAP.	470UF 35V (H/R 1150MA)	
C135	VE-30007748	EL CAP.	1000UF 35V M	
C136	VE-30000284	SMD CAP.	1000UF 35V M	
C137	VE-30000284	SMD CAP.	1NF 50V K R	
C138	VE-30000224	SMD CAP.	220PF 50V J	
C139	VE-30000284	SMD CAP.	1NF 50V K R	
C140	VE-30000360	EL CAP.	1000UF 25V M	
C141	VE-30000352	EL CAP.	100UF 16V M	
C142	VE-30000294	SMD CAP.	100NF 50V K	
C143	VE-30000294	SMD CAP.	100NF 50V K	
C144	VE-30000352	EL CAP.	100UF 16V M	
C145	VE-30000309	SMD CAP.	2.2NF 50V M (NPL)	
C146	VE-30000359	EL CAP.	1000UF 16V M	
C147	VE-30000359	EL CAP.	1000UF 16V M	
C148	VE-30000294	SMD CAP.	100NF 50V K	
C149	VE-30000294	SMD CAP.	100NF 50V K	
C150	VE-30000352	EL CAP.	100UF 16V M	
C151	VE-30000284	SMD CAP.	1NF 50V K R	
C160	VE-30007081	EL CAP.	4.7UF 50V M (NPL)	
C161	VE-30007308	CER CAP.	220PF 1KV K (PULSE)	
C162	VE-30007308	CER CAP.	220PF 1KV K (PULSE)	
C163	VE-30009208	CER CAP.	470PF 1KV K (PULSE)	
C164	VE-30016654	SMD CAP.	100NF 16V K R	
C165	VE-30000355	EL CAP.	100UF 50V M	
C166	VE-30000208	CER CAP.	470PF 1KV K (PULSE)	
C167	VE-30000208	CER CAP.	100NF 50V K	
C168	VE-30000294	SMD CAP.	100NF 50V K	
C169	VE-30000352	EL CAP.	100UF 16V M	
C170	VE-30000352	EL CAP.	100UF 16V M	
C171	VE-30000352	EL CAP.	100NF 16V K R	
C172	VE-30016654	SMD CAP.	220NF 25V Z	
C173	VE-30000315	SMD CAP.	47UF 50V M	
C201	VE-30000400	EL CAP.	47NF 100V J	
C202	VE-30000106	MKT CAP.	33NF 63V J	
C203	VE-30000099	MKT CAP.	10UF 50V M	
C204	VE-30000345	EL CAP.	220NF 25V Z	
C206	VE-30000315	SMD CAP.	1UF 50V M	
C207	VE-30000362	EL CAP.	1UF 50V M	
C208	VE-30000415	EL CAP.	4.7UF 250V M	
C209	VE-30000224	SMD CAP.	220PF 50V J	
C210	VE-30000149	MKT CAP.	2.7NF 2KV 8.3.5	
C211	VE-30000179	MKT CAP.	9.1NF 1600V 8.3.5	
C212	VE-30000137	MKT CAP.	15NF 630V J	
C213	VE-30007315	MKT CAP.	1.2UF 250V J	
C214	VE-30000415	EL CAP.	4.7UF 250V M	
C215	VE-30000167	MKT CAP.	560NF 250V J	
C216	VE-30000406	EL CAP.	47UF 250V M (HR) 105°	
C222	VE-30000431	CER CAP.	100PF 1KV M	
C223	VE-30000331	EL CAP.	100UF 350V M	
C225	VE-30000339	EL CAP.	1000UF 16V M	
C226	VE-30000356	EL CAP.	100UF 63V M	
C228	VE-30000360	EL CAP.	1000UF 25V M	
C232	VE-30000225	CER CAP.	220PF 50V J SL	
C240	VE-30000354	EL CAP.	100UF 35V M	
C250	VE-30000304	SMD CAP.	1.8NF 50V K R	
C251	VE-30000359	EL CAP.	1000UF 16V M	
C252	VE-30000289	SMD CAP.	10NF 50V K R	
C253	VE-30000294	SMD CAP.	100NF 50V K	
C254	VE-30000360	EL CAP.	1000UF 25V M	
C255	VE-30000294	SMD CAP.	100NF 50V K	
C256	VE-30000078	MKT CAP.	1UF 100V M	
C257	VE-30000304	SMD CAP.	1.8NF 50V K R	
C258	VE-30000322	SMD CAP.	3.3NF 50V K	
C263	VE-30000294	SMD CAP.	100NF 50V K	
C313	VE-30000189	SMD CAP.	100PF 50V J	
C321	VE-30000352	EL CAP.	100UF 16V M	
C322	VE-30000352	EL CAP.	100UF 16V M	
C324	VE-30000294	SMD CAP.	100NF 50V K	
C333	VE-30000294	SMD CAP.	100NF 50V K	
C402	VE-30000345	EL CAP.	10UF 50V M	
C403	VE-30000384	EL CAP.	2.2UF 50V M	
C404	VE-30000284	SMD CAP.	1NF 50V K R	
C405	VE-30000284	SMD CAP.	1NF 50V K R	
C406	VE-30000224	SMD CAP.	220PF 50V J	
C407	VE-30000312	SMD CAP.	22NF 50V K	
C408	VE-30000371	EL CAP.	22UF 50V M	
C409	VE-30000294	SMD CAP.	100NF 50V K	
C410	VE-30000294	SMD CAP.	100NF 50V K	
C411	VE-30000109	MKT CAP.	470NF 63V J	
C412	VE-30000384	EL CAP.	2.2UF 50V M	
C413	VE-30000294	SMD CAP.	100NF 50V K	
C414	VE-30000294	SMD CAP.	100NF 50V K	
C417	VE-30000294	SMD CAP.	100NF 50V K	
C418	VE-30000294	SMD CAP.	100NF 50V K	
C419	VE-30000294	SMD CAP.	100NF 50V K	
C427	VE-30000294	SMD CAP.	100NF 50V K	
C428	VE-30000294	SMD CAP.	100NF 50V K	
C440	VE-30000400	EL CAP.	47UF 50V M	
C441	VE-30000220	SMD CAP.	22PF 50V J	

[AV28BH7EES , AV28BH7EEB]

△ Symbol No.	Part No.	Part Name	Description
--------------	----------	-----------	-------------

CAPACITOR

C442	VE-30000294	SMD CAP.	100NF 50V K
C443	VE-30013411	SMD CAP.	180PF 50V J
C450	VE-30000345	EL CAP.	100UF 50V M
C451	VE-30000294	EL CAP.	100NF 50V K
C453	VE-30000355	EL CAP.	100UF 50V M
C454	VE-30000294	SMD CAP.	100NF 50V K
C455	VE-30000345	EL CAP.	100UF 50V M
C456	VE-30000352	EL CAP.	100UF 16V M
C457	VE-30000294	SMD CAP.	100NF 50V K
C468	VE-30000294	SMD CAP.	100NF 50V K
C478	VE-30000294	SMD CAP.	100NF 50V K
C492	VE-30000294	SMD CAP.	100NF 50V K
C497	VE-30000294	SMD CAP.	100NF 50V K
C498	VE-30000294	SMD CAP.	100NF 50V K
C499	VE-30000362	EL CAP.	1UF 50V M
C500	VE-30000352	EL CAP.	100UF 16V M
C505	VE-30000394	SMD CAP.	100NF 50V K
C506	VE-30000345	EL CAP.	100UF 50V K
C509	VE-30000186	SMD CAP.	100PF 50V D COG
C510	VE-30000186	SMD CAP.	100PF 50V D COG
C511	VE-30000341	SMD CAP.	68NF 50V K
C610	VE-3000074	MKT CAP.	100NF 63V J
C640	VE-30000332	SMD CAP.	4.7NF 50V K
C641	VE-30000332	SMD CAP.	4.7NF 50V K
C801	VE-30000362	EL CAP.	1UF 50V M
C802	VE-30000362	EL CAP.	1UF 50V M
C804	VE-30000409	EL CAP.	470UF 25V M
C805	VE-30000294	SMD CAP.	100NF 50V K
C806	VE-30000409	EL CAP.	470UF 25V M
C807	VE-30000294	SMD CAP.	100NF 50V K
C808	VE-30000074	MKT CAP.	100NF 63V J
C809	VE-30000074	MKT CAP.	100NF 63V J
C819	VE-30000284	SMD CAP.	1NF 50V K R
C820	VE-30000284	SMD CAP.	1NF 50V K R
C821	VE-30000309	SMD CAP.	2.2NF 50V K R
C823	VE-30000309	SMD CAP.	2.2NF 50V K R
C825	VE-30000345	EL CAP.	100UF 50V M
C900	VE-30000371	EL CAP.	22UF 50V M
C901	VE-30016654	SMD CAP.	100NF 16V K R
C902	VE-30016654	SMD CAP.	100NF 16V K R
C903	VE-30016654	SMD CAP.	100NF 16V K R
C904	VE-30000074	MKT CAP.	100NF 63V J
C905	VE-30000371	EL CAP.	22UF 50V M
C906	VE-30016654	SMD CAP.	100NF 16V K R
C907	VE-30000074	MKT CAP.	100NF 63V J
C908	VE-30016654	SMD CAP.	100NF 16V K R
C909	VE-30016654	SMD CAP.	100NF 16V K R
C910	VE-30016654	SMD CAP.	100NF 16V K R
C911	VE-30000352	EL CAP.	100UF 16V M
C912	VE-30012569	SMD CAP.	33PF 50V J
C913	VE-30012569	SMD CAP.	33PF 50V J
C914	VE-30000371	EL CAP.	22UF 50V M
C915	VE-30016654	SMD CAP.	100NF 16V K R
C916	VE-30016654	SMD CAP.	100NF 16V K R
C917	VE-30016654	SMD CAP.	100NF 16V K R
C918	VE-30016654	SMD CAP.	100NF 16V K R
C919	VE-30000375	EL CAP.	220UF 16V M
C920	VE-30000384	EL CAP.	2.2UF 50V M
C921	VE-30016654	SMD CAP.	100NF 16V K R
C926	VE-30016654	SMD CAP.	100NF 16V K R
C927	VE-30016654	SMD CAP.	100NF 16V K R
C930	VE-30000345	EL CAP.	100UF 50V M
C931	VE-30000243	CER CAP.	330PF 50V J CH
C932	VE-30016654	SMD CAP.	100NF 16V K R
C933	VE-30000294	SMD CAP.	100NF 50V K

TRANSF

△ TR101	VE-30016819	SMPS TRANSF
△ TR201	VE-30006743	HORIZONTAL DRIVER TRANSF.
△ TR202	VE-30016922	FB TRANSF.

COIL

L102	VE-30007775	PFC COIL	1MH 1KHZ 2A
L201	VE-30007771	FIXED COIL	100UH
L202	VE-30007757	EW INJECTION COIL	6MHz
L203	VE-30007770	FILTER COIL	1MHz
L204	VE-30012271	LINEARITY COIL	4.3UH
L205	VE-30007756	BRIDGE COIL	150UH 32KHZ
L304	VE-30001992	FIXED COIL	10UH
L401	VE-30001986	FIXED COIL	3.3UH
L403	VE-30001979	FIXED COIL	1UH
L405	VE-30001987	FIXED COIL	4.7UH
L420	VE-30001996	FIXED COIL	22UH
L421	VE-30001992	FIXED COIL	10UH
L422	VE-30001994	FIXED COIL	22UH J AXIAL
L423	VE-30001994	FIXED COIL	22UH J AXIAL
L427	VE-30001987	FIXED COIL	4.7UH

△ Symbol No.	Part No.	Part Name	Description
--------------	----------	-----------	-------------

COIL

L428	VE-30001987	FIXED COIL	4.7UH
L429	VE-30001987	FIXED COIL	4.7UH
L430	VE-30001987	FIXED COIL	4.7UH
L900	VE-30001992	FIXED COIL	10UH
L901	VE-30001992	FIXED COIL	10UH
L902	VE-30001992	FIXED COIL	10UH
L903	VE-30001992	FIXED COIL	10UH
L904	VE-30001987	FIXED COIL	4.7UH
VL401	VE-30002037	VIF ADJ COIL	38.9MHz

DIODE

D101	VE-30001285	SMD DIODE	
D102	VE-3000129	DIODE	1A/800V 30A
D103	VE-30007768	DIODE	5A/600V 55A
D104	VE-30007768	DIODE	5A/600V 55A
D105	VE-30007768	DIODE	5A/600V 55A
D106	VE-30007758	BRIDGE DIODE	4A/1000V 150A
D108	VE-30001318	DIODE	1A/800V 20A
D109	VE-30009699	SMD DIODE ZENER	12V
D110	VE-30001301	DIODE	2.3A/800V
D111	VE-30001299	DIODE	3A/400V 150A
D112	VE-30001302	DIODE	8A/200V 80A
D113	VE-30001302	DIODE	8A/200V 80A
D114	VE-30001302	DIODE	8A/200V 80A
D115	VE-30001285	SMD DIODE	
D116	VE-30007760	SMD ZENER DIODE	
D117	VE-30001285	SMD DIODE	
D118	VE-30007760	SMD ZENER DIODE	0.15A/100V 0.5A
D119	VE-30001284	DIODE	1A/800V 30A
D120	VE-30001291	DIODE	1A/800V 20A
D121	VE-30001318	DIODE	1A/800V 20A
D122	VE-30001318	DIODE	1A/800V 20A
D123	VE-30001285	SMD DIODE	
D126	VE-30001284	DIODE	0.15A/100V 0.5A
D127	VE-30001284	DIODE	0.15A/100V 0.5A
D128	VE-30001284	DIODE	0.15A/100V 0.5A
D201	VE-30001291	DIODE	1A/800V 30A
D202	VE-30001285	SMD DIODE	
D203	VE-30007760	SMD ZENER DIODE	
D205	VE-30007763	SMD ZENER DIODE	6A/1500V 100A
D206	VE-30007768	DIODE	5A/600V 55A
D208	VE-30001291	DIODE	1A/800V 30A
D209	VE-30001291	DIODE	1A/800V 30A
D210	VE-30001291	DIODE	3A/400V 150A
D211	VE-30001299	DIODE	3A/400V 150A
D212	VE-30001291	DIODE	1A/800V 30A
D213	VE-30001291	DIODE	1A/800V 30A
D214	VE-30007763	SMD ZENER DIODE	
D215	VE-30007762	SMD ZENER DIODE	
D216	VE-30001285	SMD DIODE	
D218	VE-30001291	DIODE	1A/800V 30A
D219	VE-30001291	DIODE	1A/800V 30A
D220	VE-30001284	DIODE	0.15A/100V 0.5A
D221	VE-30001284	DIODE	0.15A/100V 0.5A
D222	VE-30001284	DIODE	0.15A/100V 0.5A
D223	VE-30001285	SMD DIODE	
D224	VE-30001285	SMD DIODE	
D225	VE-30001318	DIODE	1A/800V 20A
D226	VE-30007760	SMD ZENER DIODE	
D227	VE-30001373	ZPD ZENER DIODE	10V
D403	VE-30001285	SMD DIODE	
D900	VE-30012412	SMD ZENER DIODE	2.4V

TRANSISTOR

Q101	VE-30007801	TRANSISTOR	
Q103	VE-30007802	TRANSISTOR	
Q104	VE-30007798	SMD TRANSISTOR	
Q105	VE-30007798	SMD TRANSISTOR	
Q106	VE-30007802	TRANSISTOR	
Q107	VE-30007798	SMD TRANSISTOR	
Q108	VE-30007798	SMD TRANSISTOR	
Q109	VE-30001457	SMD TRANSISTOR	
Q110	VE-30001457	SMD TRANSISTOR	
Q112	VE-30001454	TRANSISTOR	
Q113	VE-30001428	TRANSISTOR	
Q201	VE-30007802	TRANSISTOR	
Q202	VE-30016586	TRANSISTOR	H.OUT
Q503	VE-30001458	SMD TRANSISTOR	
Q204	VE-30001458	SMD TRANSISTOR	
Q205	VE-30007799	TRANSISTOR	
Q206	VE-30001457	SMD TRANSISTOR	
Q207	VE-30001457	SMD TRANSISTOR	
Q208	VE-30001455	TRANSISTOR	
Q403	VE-30001457	SMD TRANSISTOR	
Q408	VE-30007800	TRANSISTOR	

[AV28BH7EES , AV28BH7EEB]

△ Symbol No.	Part No.	Part Name	Description
TRANSISTOR			
0415	VE-30001457	SMD TRANSISTOR	
0801	VE-30001457	SMD TRANSISTOR	
0802	VE-30001457	SMD TRANSISTOR	
0900	VE-30001458	SMD TRANSISTOR	
0901	VE-30001457	SMD TRANSISTOR	
0902	VE-30001457	SMD TRANSISTOR	
0903	VE-30001457	SMD TRANSISTOR	
0904	VE-30001457	SMD TRANSISTOR	
0905	VE-30001457	SMD TRANSISTOR	
0906	VE-30001457	SMD TRANSISTOR	
0907	VE-30001457	SMD TRANSISTOR	
0908	VE-30001457	SMD TRANSISTOR	
0909	VE-30001458	SMD TRANSISTOR	
0910	VE-30001457	SMD TRANSISTOR	
0911	VE-30001457	SMD TRANSISTOR	
IC			
△ IC101	VE-30007442	I.C.	
△ IC102	VE-300015087	I.C.	
△ IC103	VE-30001506	I.C.	
△ IC104	VE-30007444	I.C.	
△ IC105	VE-30001500	I.C.	
△ IC106	VE-30001668	I.C.	
△ IC201	VE-30007793	I.C.	
△ IC202	VE-30001506	I.C.	
△ IC302	VE-20105598	I.C. (MEMORY)	24C32 055J311127112
△ IC304	VE-20117589	I.C. (MICOM)	PR.IC.41-AK41J G055
IC401	VE-30001495	I.C.	
IC802	VE-30007794	I.C.	
IC900	VE-30013571	I.C.	
OTHERS			
△ F101	VE-30001732	FUSE	3.15A
△ F102	VE-30009037	FUSE	6.3A
△ F103	VE-30009037	FUSE	6.3A
J412	VE-30001365	NTC MONITOR	
L101	VE-30006712	FERRITE BEAD	10R/3A
△ L103	VE-30006744	LINE FILTER	
L104	VE-30006744	LINE FILTER	
L106	VE-30006712	FERRITE BEAD	
L107	VE-30001960	FERRITE CORE	
L108	VE-30001960	FERRITE CORE	
L109	VE-30001960	FERRITE CORE	
L206	VE-30006712	FERRITE BEAD	
L207	VE-30006712	FERRITE BEAD	
L425	VE-30001971	SMD FERRITE	
L533	VE-30013413	FERRITE BEAD	
L534	VE-30013413	FERRITE BEAD	
L801	VE-30002170	FERRITE CORE	
L802	VE-30002170	FERRITE CORE	
R109	VE-30001270	PTC	9 OHM
RL2	VE-30002183	RELAY	
T401	VE-30001724	SER FILTER	5.5MHZ
T402	VE-30001726	SER FILTER	6.5MHZ
TU401	VE-30009637	TUNER	
X900	VE-30006662	XTAL	6MHZ
Z401	VE-30001706	SAW FILTER	
Z403	VE-30001692	SAW FILTER	

**MULTI SOUND P.W. BOARD ASS'Y
(VE-20085395)**

Refer to PARTS LIST in page 8 for this P.W. board.

FEATURE BOX P.W. BOARD ASS'Y (VE-20055386)

Refer to PARTS LIST in page 9 for this P.W. board.

CRT SOCKET P.W. BOARD ASS'Y (VE-20086295)

Refer to PARTS LIST in page 11 for this P.W. board.


**FRONT CONTROL P.W. BOARD ASS'Y
(VE-20082481)**

Refer to PARTS LIST in page 12 for this P.W. board.

**FRONT AV + HEADPHONE JACK P.W. BOARD
ASS'Y (VE-20083091)**

Refer to PARTS LIST in page 12 for this P.W. board.

PACKING

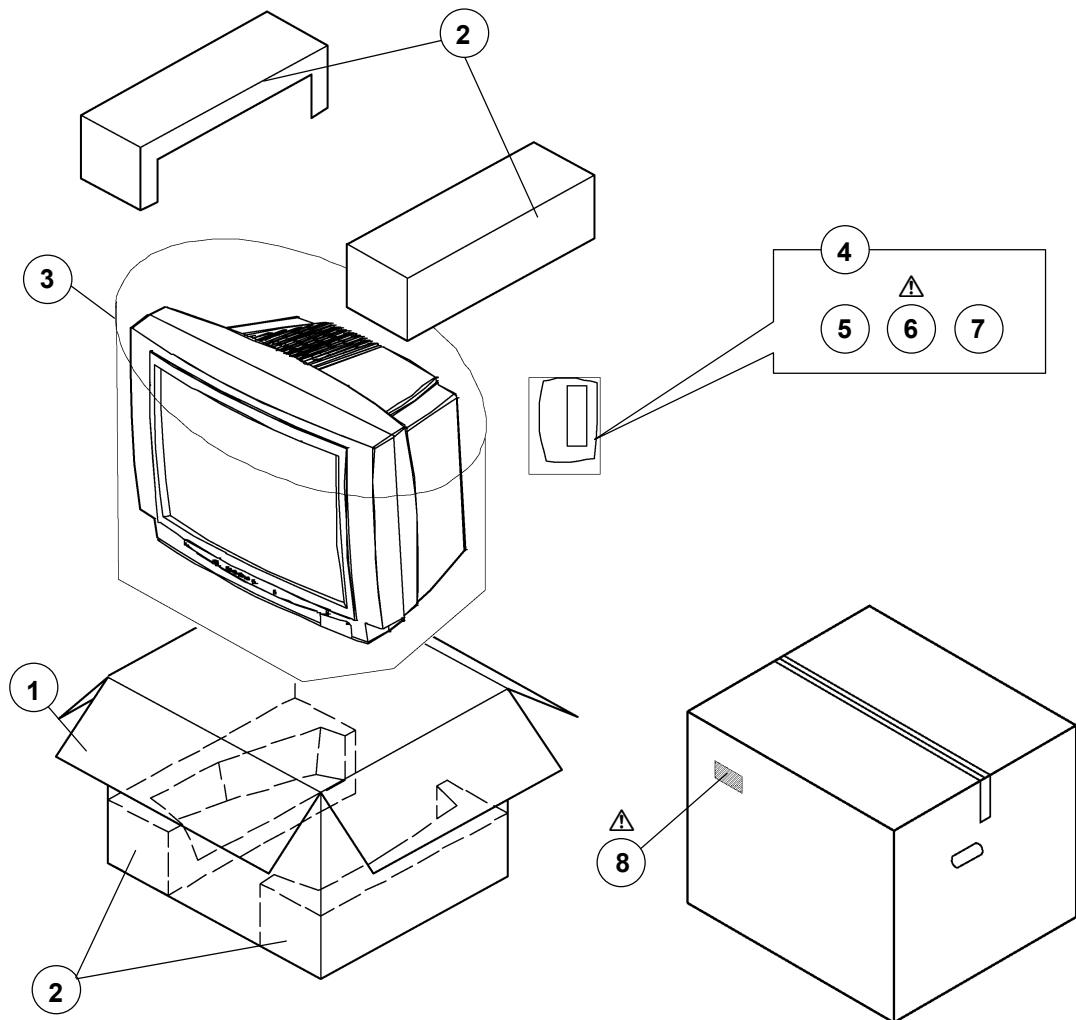

PACKING PARTS LIST

Ref. No.	Part No.	Part Name	Description
1	VE-50023336	CARTON BOX	[AV28BH7ENS]
1	VE-50023328	CARTON BOX	[AV28BH7ENB]
1	VE-50023340	CARTON BOX	[AV28BH7EES]
1	VE-50023334	CARTON BOX	[AV28BH7EEB]
1	VE-50023338	CARTON BOX	[AV28BH7EPS]
1	VE-50023331	CARTON BOX	[AV28BH7EPB]
2	VE-20081396	CUSHION ASS'Y	4 pcs in 1 set
3	VE-50026637	POLY BAG(1250*1000)	
4	VE-70000587	POLY BAG	
5	VE-30015781	REMOTE CONTROL UNIT (RM-C85)	
6	VE-50023325	INST BOOK	[AV28BH7ENS/ENB]
6	VE-50023332	INST BOOK	[AV28BH7EES/EEB]
6	VE-50023329	INST BOOK	[AV28BH7EPS/EPB]
7	BT-54013-2TK	WARRANTY CARD	
8	VE-20086449	LABEL	[AV28BH7ENS]
8	VE-20086440	LABEL	[AV28BH7ENB]
8	VE-20086455	LABEL	[AV28BH7EES]
8	VE-20086446	LABEL	[AV28BH7EEB]
8	VE-20086452	LABEL	[AV28BH7EPS]
8	VE-20086443	LABEL	[AV28BH7EPB]

AV28BH7ENS , AV28BH7ENB
AV28BH7EPS , AV28BH7EPB
AV28BH7EES , AV28BH7EEB



VICTOR COMPANY OF JAPAN, LIMITED
AV & MULTIMEDIA COMPANY DISPLAY CATEGORY 12, 3-chome, Moriya-cho, kanagawa-ku, Yokohama, kanagawa-prefecture, 221-8528, Japan

No. 51967B

 Printed in Japan
200306 WPC