

# aiwa



## NSX-AV540

COMPACT DISC STEREO SYSTEM

- BASIC TAPE MECHANISM: 6ZM-3 PR2NM
- BASIC CD MECHANISM: 4ZG-1 Z3RDSHM
- TYPE: EZ,K

SIMPLE MANUAL

- Replace this Service Manual with "Revision Publishing" when it is issued.

S/M Code No. 09-994-401-9T2

MANUAL  
SERVICE

# ELECTRICAL PARTS LIST-1/7

NOTE: The characters in the suffix column indicate the part usage.

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
KSTE	.....	XX	.....	C
EZSTE	.....	XX	.....	D
EZSTM	.....	XX	.....	E
C	503	87-010-112-040	CAP,E 100-16	AB..E
C	508	87-010-178-080	CHIP CAP 1000P	...E
C	502	87-010-186-080	CAP,CHIP 4700P	AB..E
C	506	87-010-320-080	CHIP CAP 68P	AB..E
C	504	87-010-405-040	CAP,E 10-50	AB..E
C	509	87-010-544-040	CAP,E 0.1-50 SME	AB..E
C	507	87-010-544-040	CAP,E 0.1-50 SME	AB..E
C	505	87-010-546-040	CAP,E 0.33-50	AB..E
C	510	87-018-127-080	CAP, CER 470P-50V	...E
J	501	87-A60-651-010	JACK,3.5MONO	AB..E
Q	504	87-A30-075-080	C-TR,2SA1235F	AB..E
Q	505	87-A30-076-080	C-TR,2SC3052F	AB..E
Q	501	87-A30-087-080	C-FET,2SK2158	AB..E
VR	501	87-NB7-602-010	VR,RTRY 10KAX1 1 V	AB..E
C	1	87-010-387-080	CAP,E 470-25 SME	..CDE
C	1	87-010-388-080	CAP ELECT 1000-25V SME	AB...
C	9	87-010-917-090	CAP,E 3300-50 M SMG	ABCDE
C	8	87-010-917-090	CAP,E 3300-50 M SMG	ABCDE
C	9	87-010-918-090	CAP,E 4700-50	.....
C	8	87-010-918-090	CAP,E 4700-50	.....
C	2	87-018-209-010	CAP 0.1	ABCDE
C	6	87-A11-148-080	CAP,TC U 0.1-50 Z F	..CDE
C	4	87-A11-148-080	CAP,TC U 0.1-50 Z F	..CDE
C	3	87-A11-148-080	CAP,TC U 0.1-50 Z F	..CDE
C	5	87-A11-148-080	CAP,TC U 0.1-50 Z F	..CDE
C	31	87-010-403-080	CAP, ELECT 3.3-50V	..CDE
CN	1	87-A60-851-010	CONN,9P V VH	ABCDE
D	6	87-017-447-010	DIODE,GBU4DL	AB...
D	5	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	2	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	1	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	4	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	3	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	6	87-A40-548-090	DIODE,D3SBA20	..CDE
D	31	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	32	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
PR	2	87-026-682-080	PROTECTOR,10A 60V491	..CDE
PR	1	87-026-682-080	PROTECTOR,10A 60V491	..CDE
PR	2	87-026-691-080	FUSE,10A 125V 251	.....
PR	1	87-026-691-080	FUSE,10A 125V 251	.....
PR	3	87-A91-276-080	FUSE,125MA 125V F 251	.....
PT	2	8Z-NF8-661-010	PT,SUB ZNF-8(U)	A....
PT	2	8Z-NF8-662-010	PT,SUB ZNF-8(E)	..CDE
PT	2	8Z-NF8-663-010	PT,SUB ZNF-8(H)	.B....
Q	31	87-026-245-080	TR,DTC114ES	..CDE
Q	32	87-A30-198-080	TR,KTC3199GR	..CDE
RY	2	87-A90-976-010	RELAY,AC12V SDT-S-112LMR	A.CDE
RY	1	87-A91-281-010	RELAY,AC DC12V OSA-SS-212DM5	.B....
S	1	87-A90-165-010	SW,SL 1-2-3 SWS2301	.....
T	2	87-A60-317-010	TERMINAL, 1P MSC	ABCDE
T	1	87-A60-317-010	TERMINAL, 1P MSC	ABCDE
*		88-NF8-205-010	GUIDE,FL	AB..E
*		8Z-NF8-201-010	GUIDE,OPE	AB..E
*		8Z-NF8-202-010	GUIDE,FUN	AB..E
C	201	87-012-156-080	C-CAP,S 220P-50 CH	AB..E
C	254	87-010-194-080	CAP, CHIP 0.047	AB..E
C	256	87-015-699-040	CAP,E 10-50 7L	AB..E
C	259	87-015-699-040	CAP,E 10-50 7L	AB..E
C	251	87-015-699-040	CAP,E 10-50 7L	AB..E
C	255	87-A10-586-040	CAP,E 47-35 7L SR	AB...
C	255	87-A10-797-040	CAP,E 47-35 M 5L SRM	...E
C	302	87-010-182-080	C-CAP,S 2200P-50 B	AB..E
C	301	87-010-182-080	C-CAP,S 2200P-50 B	AB..E
C	314	87-010-194-080	CAP, CHIP 0.047	AB..E
C	311	87-010-194-080	CAP, CHIP 0.047	AB..E
C	312	87-010-405-040	CAP,E 10-50	AB..E
C	324	87-010-194-080	CAP, CHIP 0.047	AB..E
C	323	87-010-248-040	CAP,E 220-10 SME	AB...
C	325	87-010-263-040	CAP,E 100-10	AB..E
C	322	87-015-694-040	E/CAP 0.47-50	AB..E
C	323	87-016-459-040	CAP,E 470-10 SMG	...E
C	332	87-010-178-080	CHIP CAP 1000P	.....
C	332	87-010-198-080	CAP, CHIP 0.022	AB..E
C	334	87-010-312-080	C-CAP,S 15P-50 CH	AB..E
C	335	87-012-140-080	CAP 470P	AB..E
C	333	87-012-140-080	CAP 470P	AB..E
C	338	87-012-155-080	C-CAP 180P-50CH	AB..E
C	339	87-012-156-080	C-CAP,S 220P-50 CH	AB..E
C	341	87-010-194-080	CAP, CHIP 0.047	AB..E
C	340	87-010-197-080	CAP, CHIP 0.01 DM	AB..E
C	351	87-010-382-040	CAP,E 22-25 SME	AB..E
C	401	87-010-197-080	CAP, CHIP 0.01 DM	AB..E
C	457	87-010-196-080	CHIP CAPACITOR,0.1-25	AB..E
C	455	87-010-196-080	CHIP CAPACITOR,0.1-25	AB..E

# ELECTRICAL PARTS LIST-2/7

C	456	87-012-158-080	C-CAP,S 390P-50 CH	AB..E.....
C	601	87-010-196-080	CHIP CAPACITOR,0.1-25	AB..E.....
C	603	87-010-322-080	C-CAP,S 100P-50 CH	AB..E.....
C	602	87-010-322-080	C-CAP,S 100P-50 CH	AB..E.....
C	604	87-010-322-080	C-CAP,S 100P-50 CH	AB..E.....
C	701	87-010-196-080	CHIP CAPACITOR,0.1-25	AB..E.....
CON	102	87-099-015-010	CONN,13P 6216V	AB..E.....
CON	101	87-099-720-010	CONN,30P TYK-B(P)	AB.....
CON	101	88-NF9-658-010	CONN,30P BLK TYK-B(P)	...E.....
CON	301	87-099-013-010	CONN,11P 6216 V	A...E.....
CON	301	87-099-017-010	CONN, 15P 6216 V	.B.....
D	204	87-020-465-080	DIODE,1SS133 (110MA)	AB..E.....
D	311	87-A40-509-080	ZENER,MTZJ6.8C	AB..E.....
D	452	87-017-932-080	ZENER,MTJ6.2B	AB..E.....
EMI	201	87-008-372-080	FILTER, EMI BL OIRNI	AB..E.....
EMI	202	87-A50-322-080	C-COIL,S BK2125 LM252	AB..E.....
FL	401	8Z-NF8-616-010	FL,SVA-11MM22	...E.....
FL	401	8Z-NH8-603-010	FL,BJ674GNK	AB.....
IC	201	8Z-NF8-602-010	C-IC,UPD780228GF-031-3BA	AB.....
IC	201	8Z-NF8-675-010	C-IC,UPD780228GF-037-3BA	...E.....
IC	251	87-A20-914-010	IC,SPS-442-1-F	AB.....
IC	251	87-A20-951-010	IC,TSOP1838RF1	...E.....
IC	451	87-A21-023-040	C-IC,BA3835F	AB..E.....
IC	601	87-A21-021-040	C-IC,BU2099FV	AB..E.....
L	331	87-A50-434-010	COIL,CLK 4.19M(TOKO)	AB..E.....
LED	311	87-A40-317-080	LED,SLR-342VCT31 RED	AB..E.....
LED	611	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	AB..E.....
LED	633	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB..E.....
LED	634	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB..E.....
Q	207	87-A30-087-080	C-FET,2SK2158	AB..E.....
Q	251	87-A30-074-080	C-TR,RT1P 141C	AB..E.....
Q	302	87-A30-067-080	C-TR,2SA 1298Y	...E.....
Q	301	87-A30-067-080	C-TR,2SA 1298Y	...E.....
Q	301	87-A30-159-080	C-TR,KTA1298Y	AB.....
Q	302	87-A30-159-080	C-TR,KTA1298Y	AB.....
Q	303	87-A30-240-080	TR,CSA1585BC	AB..E.....
Q	311	87-026-610-080	TR,KTC3198GR	AB..E.....
Q	312	87-A30-087-080	C-FET,2SK2158	AB..E.....
Q	322	87-A30-073-080	C-TR,RT1N 141C	AB..E.....
Q	323	87-A30-087-080	C-FET,2SK2158	AB..E.....
S	434	87-A91-024-080	SW,TACT KSH0611BT	AB..E.....
SW	252	87-A90-535-010	SW,RTRY EC16B24304	AB..E.....
SW	253	87-A90-950-010	SW,RTRY EC12E12504 ENCODER	AB..E.....
C	309	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE.....
C	302	87-010-318-080	C-CAP,S 47P-50 CH	ABCDE.....
C	301	87-010-318-080	C-CAP,S 47P-50 CH	ABCDE.....
C	306	87-012-145-080	CAP, CHIP S 270P CH	ABCDE.....
C	305	87-012-145-080	CAP, CHIP S 270P CH	ABCDE.....
C	304	87-012-157-080	C-CAP,S 330P-50 CH	ABCDE.....
C	303	87-012-157-080	C-CAP,S 330P-50 CH	ABCDE.....
C	314	87-010-178-080	CHIP CAP 1000P	.B.....
C	315	87-010-178-080	CHIP CAP 1000P	.B.....
C	316	87-010-178-080	CHIP CAP 1000P	.B.....
C	313	87-010-178-080	CHIP CAP 1000P	.B.....
C	314	87-010-180-080	C-CER 1500P	A.CDE.....
C	313	87-010-180-080	C-CER 1500P	A.CDE.....
C	315	87-010-182-080	C-CAP,S 2200P-50 B	A.CDE.....
C	316	87-010-182-080	C-CAP,S 2200P-50 B	A.CDE.....
C	310	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE.....
C	311	87-010-198-080	CAP, CHIP 0.022	ABCDE.....
C	312	87-010-198-080	CAP, CHIP 0.022	ABCDE.....
C	324	87-010-260-080	CAP, ELECT 47-25V	ABCDE.....
C	325	87-010-370-080	CAP,E 330-6.3 SME	ABCDE.....
C	327	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE.....
C	328	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE.....
C	322	87-016-492-080	C-CAP,S 0.33-16 FZ	ABCDE.....
C	321	87-016-492-080	C-CAP,S 0.33-16 FZ	ABCDE.....
C	335	87-010-401-080	CAP, ELECT 1-50V	ABCDE.....
C	336	87-010-401-080	CAP, ELECT 1-50V	ABCDE.....
C	354	87-010-175-080	CAP 560P	ABCDE.....
C	359	87-010-183-080	C-CAP,S 2700P-50 B	ABCDE.....
C	358	87-010-183-080	C-CAP,S 2700P-50 B	ABCDE.....
C	357	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	356	87-010-260-080	CAP, ELECT 47-25V	ABCDE.....
C	351	87-012-140-080	CAP 470P	ABCDE.....
C	352	87-012-140-080	CAP 470P	ABCDE.....
C	355	87-012-349-080	C-CAP,S 1000P-50 CH	ABCDE.....
C	360	87-010-183-080	C-CAP,S 2700P-50 B	ABCDE.....
C	363	87-A10-772-080	CAP,M 5600P-50 J	ABCDE.....
C	379	87-010-382-080	CAP, ELECT 22-25V	ABCDE.....
C	374	87-016-083-080	C-CAP,S 0.15-16 RK	ABCDE.....
C	373	87-016-083-080	C-CAP,S 0.15-16 RK	ABCDE.....
C	380	87-010-382-080	CAP, ELECT 22-25V	ABCDE.....
C	388	87-012-156-080	C-CAP,S 220P-50 CH	ABCDE.....
C	392	87-010-319-080	C-CAP,S 56P-50 CH	ABCDE.....
C	393	87-010-319-080	C-CAP,S 56P-50 CH	ABCDE.....
C	391	87-010-319-080	C-CAP,S 56P-50 CH	ABCDE.....
C	394	87-010-319-080	C-CAP,S 56P-50 CH	ABCDE.....
CN	301	87-099-827-010	CONN,3P S2M-3W	ABCDE.....
CN	351	87-099-832-010	CONN,8P S2M-8W	ABCDE.....
D	352	87-A40-269-080	C-DIODE,MC2836	ABCDE.....
IC	303	87-A20-783-040	C-IC,BA7762AFS	ABCDE.....

## ELECTRICAL PARTS LIST-3/7

L	302	87-A50-049-010	COIL,TRAP 85K(COI)	ABCDE
L	301	87-A50-049-010	COIL,TRAP 85K(COI)	ABCDE
L	351	87-007-342-010	COIL,OSC 85K BIAS	ABCDE
Q	358	87-026-610-080	TR,KTC3198GR	ABCDE
Q	357	87-026-610-080	TR,KTC3198GR	ABCDE
Q	359	87-026-610-080	TR,KTC3198GR	ABCDE
Q	353	87-A30-087-080	C-FET,2SK2158	ABCDE
Q	354	87-A30-087-080	C-FET,2SK2158	ABCDE
Q	351	87-A30-087-080	C-FET,2SK2158	ABCDE
Q	355	87-A30-105-080	C-TR,RT1P 441C	ABCDE
SFR	351	87-A90-433-080	SFR,50K H NVZ6TLTA	ABCDE
SFR	352	87-A90-433-080	SFR,50K H NVZ6TLTA	ABCDE
C	458	87-010-196-080	CHIP CAPACITOR,0.1-25	A
C	457	87-010-196-080	CHIP CAPACITOR,0.1-25	A
C	452	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	451	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	459	87-A11-004-080	CAP,M 0.022-50 J DE	A
C	467	87-010-805-080	CAP, S 1-16	ABCDE
C	465	87-A11-004-080	CAP,M 0.022-50 J DE	A
C	460	87-A11-004-080	CAP,M 0.022-50 J DE	A
C	466	87-A11-004-080	CAP,M 0.022-50 J DE	A
IC	451	87-A21-031-040	C-IC,BU4551BF	A
C	9	87-010-917-090	CAP,E 3300-50 M SMG	ABCDE
C	6	87-012-368-080	C-CAP,S 0.1-50 F	ABCDE
C	4	87-012-368-080	C-CAP,S 0.1-50 F	ABCDE
C	5	87-012-368-080	C-CAP,S 0.1-50 F	ABCDE
C	3	87-012-368-080	C-CAP,S 0.1-50 F	ABCDE
C	2	87-012-369-080	C-CAP,S 0.047-50F	ABCDE
C	1	87-012-369-080	C-CAP,S 0.047-50F	ABCDE
C	10	87-010-917-090	CAP,E 3300-50 M SMG	ABCDE
C	29	87-010-247-080	CAP, ELECT 100-50V	ABCDE
C	28	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	22	87-010-385-080	CAP, ELECT 220-25V	AB
C	21	87-010-385-080	CAP, ELECT 220-25V	AB
C	21	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	24	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	22	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	23	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	25	87-010-430-080	CAP, ELECT 100-63	ABCDE
C	27	87-012-140-080	CAP 470P	ABCDE
C	30	87-010-112-080	CAP, ELECT 100-16V	ABCDE
C	31	87-010-235-080	CAP,E 470-16 SME	ABCDE
C	33	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	34	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	61	87-010-260-080	CAP, ELECT 47-25V	ABCDE
C	62	87-010-403-080	CAP, ELECT 3.3-50V	ABCDE
C	92	87-010-248-080	CAP, ELECT 220-10V	A
C	93	87-010-380-080	CAP, ELECT 47-16V	ABCDE
C	91	87-010-401-080	CAP, ELECT 1-50V	ABCDE
CN	1	87-A60-739-010	CONN,13P JL-BT	A
CN	92	87-A60-109-010	CONN,2P V S2M-2W	ABCDE
CNA	1	8Z-NF8-669-010	CONN ASSY,9P VH	ABCDE
D	1	87-017-654-060	DIODE,GBU6J	AB
D	9	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	8	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	5	87-070-274-080	DIODE,1N4003 SEM	ABCDE
D	4	87-070-274-080	DIODE,1N4003 SEM	ABCDE
D	3	87-070-274-080	DIODE,1N4003 SEM	ABCDE
D	6	87-070-274-080	DIODE,1N4003 SEM	ABCDE
D	7	87-A40-383-080	ZENER,MTZJ30A	ABCDE
D	1	87-A40-547-090	DIODE,D5SBA20	.CDE
D	10	87-A40-345-080	ZENER,MTZJ10C	ABCDE
D	64	87-070-274-080	DIODE,1N4003 SEM	ABCDE
D	62	87-A40-269-080	C-DIODE,MC2836	ABCDE
D	61	87-A40-270-080	C-DIODE,MC2838	ABCDE
D	91	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
D	92	87-020-465-080	DIODE,1SS133 (110MA)	ABCDE
JW	16	87-008-372-080	FILTER, EMI BL OIRNI	.BCDE
Q	2	87-026-609-080	TR,KTA1266GR	ABCDE
Q	1	87-026-609-080	TR,KTA1266GR	ABCDE
Q	5	87-026-610-080	TR,KTC3198GR	ABCDE
Q	9	87-A30-196-080	TR,2SC4115SRS	ABCDE
Q	3	89-213-702-010	TR,2SB1370 (1.8W)	.BCDE
Q	64	87-A30-075-080	C-TR,2SA1235F	ABCDE
Q	66	87-A30-075-080	C-TR,2SA1235F	ABCDE
Q	81	87-A30-074-080	C-TR,RT1P 141C	.BCDE
Q	82	87-A30-107-080	C-TR,CMBT5401	
Q	91	87-A30-076-080	C-TR,2SC3052F	ABCDE
Q	92	87-A30-240-080	TR,CSA1585BC	
R	20	87-A00-261-080	RES,M/F 0.56-1W J	A
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	ABCDE
		87-067-703-010	TAPPING SCREW, BVT2+3-10	.BCDE
C	102	87-010-178-080	CHIP CAP 1000P	ABCDE
C	101	87-010-178-080	CHIP CAP 1000P	ABCDE
C	102	87-010-182-080	C-CAP,S 2200P-50 B	.BCDE
C	101	87-010-182-080	C-CAP,S 2200P-50 B	.BCDE
C	105	87-010-186-080	CAP,CHIP 4700P	.BCDE
C	106	87-010-186-080	CAP,CHIP 4700P	.BCDE
C	109	87-010-322-080	C-CAP,S 100P-50 CH	.BCDE
C	107	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	108	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	112	87-010-260-080	CAP, ELECT 47-25V	.BCDE

# ELECTRICAL PARTS LIST-4/7

C	111	87-010-260-080	CAP, ELECT 47-25V	.BCDE
C	110	87-010-322-080	C-CAP, S 100P-50 CH	.BCDE
C	117	87-016-247-080	C-CAP, 0.1-50 F	.BCDE
C	118	87-016-247-080	C-CAP, 0.1-50 F	.BCDE
C	113	87-A10-812-080	C-CAP, S 220P-200 J CH	.BCDE
C	114	87-A10-812-080	C-CAP, S 220P-200 J CH	.BCDE
C	123	87-010-176-080	C-CAP, S 680P-50 SL	ABCDE
C	124	87-010-176-080	C-CAP, S 680P-50 SL	ABCDE
C	129	87-010-191-080	C-CAP, S 0.015-50 F	ABCDE
C	130	87-010-191-080	C-CAP, S 0.015-50 F	ABCDE
C	133	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	134	87-010-382-080	CAP, ELECT 22-25V	.CDE
C	136	87-012-368-080	C-CAP, S 0.1-50 F	ABCDE
D	109	87-020-465-080	DIODE, 1SS133 (110MA)	.BCDE
D	108	87-A40-488-080	DIODE, 1SS244	.BCDE
D	107	87-A40-488-080	DIODE, 1SS244	.BCDE
D	110	87-020-465-080	DIODE, 1SS133 (110MA)	.BCDE
D	111	87-A40-270-080	C-DIODE, MC2838	.BCDE
J	203	87-A60-238-010	TERMINAL, SP 4P (MSC)	ABCDE
J	201	87-A60-483-010	JACK, DIA6.3 BLK ST W/S KM	ABCDE
L	102	87-003-383-010	COIL, 1UH-S	ABCDE
L	101	87-003-383-010	COIL, 1UH-S	ABCDE
Q	103	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	105	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	106	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	104	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	108	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	109	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	107	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	101	87-A30-257-080	C-TR, 2SD1306E	ABCDE
Q	102	87-A30-257-080	C-TR, 2SD1306E	ABCDE
Q	110	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	116	87-A30-097-010	TR, FN 1016	.BCDE
Q	115	87-A30-097-010	TR, FN 1016	.BCDE
Q	118	87-A30-098-010	TR, FP 1016	.BCDE
Q	117	87-A30-098-010	TR, FP 1016	.BCDE
Q	112	87-A30-190-080	TR, CC5551	.BCDE
Q	111	87-A30-190-080	TR, CC5551	.BCDE
Q	126	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	129	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	128	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	124	87-A30-106-070	C-TR, CMBT5551	.BCDE
Q	123	87-A30-106-070	C-TR, CMBT5551	.BCDE
Q	130	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	131	87-A30-076-080	C-TR, 2SC3052F	.BCDE
R	129	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	130	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	131	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	132	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	145	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	146	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	143	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	144	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	143	87-A00-440-050	RES, 220-1/2W J RP	.B
R	146	87-A00-440-050	RES, 220-1/2W J RP	.B
R	144	87-A00-440-050	RES, 220-1/2W J RP	.B
R	145	87-A00-440-050	RES, 220-1/2W J RP	.B
R	165	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	166	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
TH	101	87-A91-042-080	C-THMS, 100K 55001	.BCDE
TH	102	87-A91-042-080	C-THMS, 100K 55001	.BCDE
C	204	87-010-177-080	C-CAP, S 820P-50 SL	A
C	203	87-010-177-080	C-CAP, S 820P-50 SL	A
C	209	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	211	87-010-182-080	C-CAP, S 2200P-50 B	.CDE
C	212	87-010-182-080	C-CAP, S 2200P-50 B	.CDE
C	217	87-010-260-080	CAP, ELECT 47-25V	.BCDE
C	218	87-010-260-080	CAP, ELECT 47-25V	.BCDE
C	213	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	210	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	214	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	213	87-010-408-080	CAP, ELECT 47-50V	.B
C	214	87-010-408-080	CAP, ELECT 47-50V	.B
C	219	87-A10-946-080	C-CAP, S 220P-100 J CH	.BCDE
C	227	87-010-186-080	CAP, CHIP 4700P	.BCDE
C	228	87-010-186-080	CAP, CHIP 4700P	.BCDE
C	225	87-010-544-080	CAP, ELECT 0.1-50V	.B
C	226	87-010-544-080	CAP, ELECT 0.1-50V	.B
C	225	87-012-368-080	C-CAP, S 0.1-50 F	.CDE
C	226	87-012-368-080	C-CAP, S 0.1-50 F	.CDE
C	220	87-A10-946-080	C-CAP, S 220P-100 J CH	.BCDE
C	237	87-010-190-080	S CHIP F 0.01	ABCDE
C	232	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	238	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE
C	230	87-010-993-080	C-CAP, S 0.056-25 B	ABCDE
C	252	87-010-183-080	C-CAP, S 2700P-50 B	ABCDE
C	251	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	899	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	898	87-010-993-080	C-CAP, S 0.056-25 B	ABCDE
C	900	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
CN	201	87-A60-739-010	CONN, 13P JL-BT	A
D	208	87-A40-488-080	DIODE, 1SS244	.BCDE

# ELECTRICAL PARTS LIST-5/7

D	207	87-A40-488-080	DIODE,1SS244	.BCDE
D	213	87-020-465-080	DIODE,1SS133 (110MA)	.BCDE
D	211	87-A40-270-080	C-DIODE,MC2838	.BCDE
J	205	87-A60-751-010	JACK,PIN 2P R/W BLUE	A
J	204	87-A60-752-010	JACK,PIN 4P R/W,O/B	.BCDE
J	206	87-A60-872-010	JACK,PIN 3P W/R/O	A
L	202	87-003-383-010	COIL,1UH-S	ABCDE
L	801	87-003-383-010	COIL,1UH-S	ABCDE
Q	206	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	205	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	203	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	204	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	209	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	207	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	208	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	210	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	219	87-A30-119-040	C-TR,2SC3906K R	.BCDE
Q	212	87-A30-190-080	TR,CC5551	.BCDE
Q	211	87-A30-190-080	TR,CC5551	.BCDE
Q	218	87-A30-255-010	TR,2SB1342	.BCDE
Q	217	87-A30-255-010	TR,2SB1342	.BCDE
Q	216	87-A30-256-010	TR,2SD1933	.BCDE
Q	215	87-A30-256-010	TR,2SD1933	.BCDE
Q	225	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	226	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	224	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	227	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	223	87-A30-105-080	C-TR,RT1P 441C	ABCDE
Q	220	87-A30-119-040	C-TR,2SC3906K R	.BCDE
Q	230	87-A30-257-080	C-TR,2SD1306E	ABCDE
R	234	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	231	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	232	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	233	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	266	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	265	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
TH	201	87-A91-042-080	C-THMS,100K 55001	
TH	202	87-A91-042-080	C-THMS,100K 55001	
C	802	87-010-176-080	C-CAP,S 680P-50 SL	ABCDE
C	801	87-010-176-080	C-CAP,S 680P-50 SL	ABCDE
C	808	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	807	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	805	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	803	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	804	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	806	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	810	87-010-112-080	CAP, ELECT 100-16V	ABCDE
C	817	87-010-221-080	CAP, ELECT 470-10V	ABCDE
C	813	87-010-400-080	CAP, ELECT 0.47-50V	ABCDE
C	812	87-010-493-080	CAP,E 0.47-50 GAS	ABCDE
C	811	87-010-493-080	CAP,E 0.47-50 GAS	ABCDE
C	814	87-010-494-080	CAP ELECT GAS 1/50	ABCDE
C	819	87-A10-800-080	C-CAP,S 6800P-16 J B CM	ABCDE
C	818	87-A10-891-080	CAP,E 4.7-25 SME(K)	ABCDE
C	824	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	820	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	829	87-010-545-080	CAP, ELECT 0.22-50V	ABCDE
C	822	87-A10-804-080	C-CAP,S 0.1-25 J B	ABCDE
C	839	87-010-805-080	CAP, S 1-16	ABCDE
C	831	87-010-971-080	C-CAP,S 4700P-50 B J	ABCDE
C	837	87-010-971-080	C-CAP,S 4700P-50 B J	ABCDE
C	830	87-012-142-080	CAP, S 0.33-16	ABCDE
C	838	87-012-349-080	C-CAP,S 1000P-50 CH	ABCDE
C	832	87-012-349-080	C-CAP,S 1000P-50 CH	ABCDE
C	835	87-A11-182-080	C-CAP,S 0.27-16 J B	ABCDE
C	834	87-A11-182-080	C-CAP,S 0.27-16 J B	ABCDE
C	836	87-A11-183-080	C-CAP,S 0.12-16 J B	ABCDE
C	833	87-A11-183-080	C-CAP,S 0.12-16 J B	ABCDE
C	840	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	846	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	847	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	848	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	849	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	845	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	844	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	843	87-A10-229-080	C-CAP,S 0.68-10 K W5	ABCDE
C	841	87-A10-799-080	C-CAP,S 5600P-16 J B CM	ABCDE
C	842	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABCDE
C	850	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	857	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	853	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	854	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	856	87-A10-801-080	C-CAP,S 0.022-16 J B CM	ABCDE
C	855	87-A10-801-080	C-CAP,S 0.022-16 J B CM	ABCDE
C	851	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABCDE
C	852	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABCDE
C	899	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	890	87-010-993-080	C-CAP,S 0.056-25 B	.BCDE
D	802	87-070-136-080	ZENER,MTZJ5.1B	ABCDE
D	801	87-A40-442-080	ZENER,MTZJ9.1A	ABCDE
IC	801	87-A20-853-010	C-IC,M62463FP	ABCDE
L	801	87-003-383-010	COIL,1UH-S	.BCDE

ELECTRICAL PARTS LIST-6/7

R	807	87-022-214-080	C-RES S100K-1/10WF	ABCDE
C	602	87-010-180-080	C-CER 1500P	ABCDE
C	601	87-010-180-080	C-CER 1500P	ABCDE
C	606	87-010-318-080	C-CAP,S 47P-50 CH	ABCDE
C	605	87-010-318-080	C-CAP,S 47P-50 CH	ABCDE
C	619	87-010-185-080	C-CAP,S 3900P-50 B	ABCDE
C	613	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	614	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	617	87-A11-008-080	CAP,M 0.056-50 J DE	ABCDE
C	618	87-A11-008-080	CAP,M 0.056-50 J DE	ABCDE
C	615	87-A11-011-080	CAP,M 0.12-50 J DE	ABCDE
C	616	87-A11-011-080	CAP,M 0.12-50 J DE	ABCDE
C	620	87-010-185-080	C-CAP,S 3900P-50 B	ABCDE
C	627	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	621	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	622	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	629	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	623	87-A10-773-080	CAP,M 0.10-50 J	ABCDE
C	624	87-A10-773-080	CAP,M 0.10-50 J	ABCDE
C	637	87-010-183-080	C-CAP,S 2700P-50 B	ABCDE
C	636	87-010-194-080	CAP, CHIP 0.047	ABCDE
C	634	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	635	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	630	87-010-213-080	C-CAP,S 0.015-50 B	ABCDE
C	633	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	632	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	638	87-010-314-080	C-CAP,S 22P-50V	ABCDE
C	639	87-010-314-080	C-CAP,S 22P-50V	ABCDE
C	631	87-010-992-080	C-CAP,S 0.047-25 B	ABCDE
C	641	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	678	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	677	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	680	87-A11-144-080	CAP,TC U 0.1-50 K B	.CDE
CN	604	87-099-570-010	CONN,13P TUC-P13P-B1	AB
CN	601	87-099-719-010	CONN,30P TYK-B(X)	AB
CN	602	87-A60-131-010	CONN,6P V FE	ABCDE
CN	605	87-A60-189-010	CONN,16P V TUC-P16P-B1	.DE
CN	601	88-NF9-657-010	CONN,30P H BLK TYK-B(X)	.CDE
D	601	87-A40-002-080	ZENER,MTZJ5.1C	ABCDE
D	603	87-A40-234-080	ZENER,MTZJ5.6A	.CDE
D	602	87-A40-438-080	ZENER,MTZJ4.7A	ABCDE
JC	601	87-A21-011-040	C-IC,M62445FP-600D	ABCDE
J	602	87-A60-398-010	JACK,PIN 2P R/W HSP-242V24	ABCDE
JW	604	87-020-465-080	DIODE,1SS133 (110MA)	A
Q	601	87-026-609-080	TR,KTA1266GR	ABCDE
Q	604	87-A30-142-040	C-TR,DTA123EKA	.CDE
Q	601	89-212-370-080	TR,2SB1237 TV2	.CDE
C	735	87-010-178-080	CHIP CAP 1000P	.CDE
C	736	87-010-193-080	CHIP CAPACITOR,0.033	AB
C	733	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	732	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	731	87-010-560-080	CAP,E 10-50 GAS	ABCDE
C	734	87-012-157-080	C-CAP,S 330P-50 CH	ABCDE
C	835	87-A11-182-080	C-CAP,S 0.27-16 J B	A
C	834	87-A11-182-080	C-CAP,S 0.27-16 J B	A
C	836	87-A11-183-080	C-CAP,S 0.12-16 J B	A
C	833	87-A11-183-080	C-CAP,S 0.12-16 J B	A
JR	703	87-012-368-080	C-CAP,S 0.1-50 F	.CDE
Q	732	87-A30-075-080	C-TR,2SA1235F	ABCDE
Q	731	87-A30-076-080	C-TR,2SC3052F	ABCDE
Q	900	87-010-196-080	CHIP CAPACITOR,0.1-25	.BCDE
C	101	87-010-405-080	CAP, ELECT 10-50V	A
C	102	87-010-405-080	CAP, ELECT 10-50V	A
C	199	87-010-197-080	CAP, CHIP 0.01 DM	A
C	203	87-010-405-080	CAP, ELECT 10-50V	A
C	204	87-010-405-080	CAP, ELECT 10-50V	A
C	208	87-010-408-080	CAP, ELECT 47-50V	A
C	207	87-010-408-080	CAP, ELECT 47-50V	A
C	211	87-010-260-080	CAP, ELECT 47-25V	A
C	212	87-010-260-080	CAP, ELECT 47-25V	A
C	219	87-012-368-080	C-CAP,S 0.1-50 F	A
C	219	87-016-247-080	C-CAP,0.1-50 F	A
C	214	87-A10-812-080	C-CAP,S 220P-200 J CH	A
C	213	87-A10-812-080	C-CAP,S 220P-200 J CH	A
C	214	87-A10-946-080	C-CAP,S 220P-100 J CH	A
C	213	87-A10-946-080	C-CAP,S 220P-100 J CH	A
C	221	87-010-178-080	CHIP CAP 1000P	A
C	222	87-010-178-080	CHIP CAP 1000P	A
C	220	87-012-368-080	C-CAP,S 0.1-50 F	A
C	220	87-016-247-080	C-CAP,0.1-50 F	A
C	306	87-010-181-080	CAP,CHIP S 1800P	.CDE
C	305	87-010-181-080	CAP,CHIP S 1800P	.CDE
C	309	87-010-322-080	C-CAP,S 100P-50 CH	A
C	308	87-010-403-080	CAP, ELECT 3.3-50V	A
C	307	87-010-403-080	CAP, ELECT 3.3-50V	A
C	303	87-010-404-080	CAP, ELECT 4.7-50V	A
C	304	87-010-404-080	CAP, ELECT 4.7-50V	A
C	314	87-010-260-080	CAP, ELECT 47-25V	A
C	313	87-010-260-080	CAP, ELECT 47-25V	A
C	310	87-010-322-080	C-CAP,S 100P-50 CH	A
C	312	87-A10-946-080	C-CAP,S 220P-100 J CH	A
C	311	87-A10-946-080	C-CAP,S 220P-100 J CH	A

ELECTRICAL PARTS LIST-7/7

C	322	87-010-186-080	CAP,CHIP 4700P	A.....
C	321	87-010-186-080	CAP,CHIP 4700P	A.....
C	407	87-010-186-080	CAP,CHIP 4700P	A.....
C	404	87-010-260-080	CAP, ELECT 47-25V	A.....
C	401	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	403	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	400	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	408	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	405	87-A10-946-080	C-CAP,S 220P-100 J CH	A.....
C	501	87-010-183-080	C-CAP,S 2700P-50 B	A.....
C	509	87-010-186-080	CAP,CHIP 4700P	A.....
C	506	87-010-260-080	CAP, ELECT 47-25V	A.....
C	503	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	505	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	502	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	507	87-A10-946-080	C-CAP,S 220P-100 J CH	A.....
C	510	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	603	87-010-190-080	S CHIP F 0.01	A.....
CN	601	87-010-993-080	C-CAP,S 0.056-25 B	A.....
CN	101	87-A60-727-010	CONN,13P JL-R	A.....
CN	102	87-A60-727-010	CONN,13P JL-R	A.....
CN	502	87-099-043-010	CONN 2P EH	A.....
CN	501	87-099-043-010	CONN 2P EH	A.....
D	197	87-A40-270-080	C-DIODE,MC2838	A.....
D	208	87-A40-488-080	DIODE,1SS244	A.....
D	207	87-A40-488-080	DIODE,1SS244	A.....
D	212	87-A40-270-080	C-DIODE,MC2838	A.....
D	302	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	306	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	305	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	301	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	309	87-A40-488-080	DIODE,1SS244	A.....
D	312	87-A40-270-080	C-DIODE,MC2838	A.....
D	310	87-A40-488-080	DIODE,1SS244	A.....
D	401	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	402	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	404	87-A40-488-080	DIODE,1SS244	A.....
D	412	87-A40-270-080	C-DIODE,MC2838	A.....
D	501	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	502	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	504	87-A40-488-080	DIODE,1SS244	A.....
L	601	87-003-383-010	COIL,1UH-S	A.....
Q	101	89-213-702-010	TR,2SB1370 (1.8W)	A.....
Q	102	89-213-702-010	TR,2SB1370 (1.8W)	A.....
Q	209	87-A30-190-080	TR,CC5551	A.....
Q	210	87-A30-190-080	TR,CC5551	A.....
Q	216	87-A30-214-010	TR,2SB1344	A.....
Q	215	87-A30-214-010	TR,2SB1344	A.....
Q	218	87-A30-215-010	TR,2SD2025	A.....
Q	217	87-A30-215-010	TR,2SD2025	A.....
Q	222	87-A30-106-070	C-TR,CMBT5551	A.....
Q	221	87-A30-106-070	C-TR,CMBT5551	A.....
Q	317	87-A30-106-070	C-TR,CMBT5551	A.....
Q	318	87-A30-106-070	C-TR,CMBT5551	A.....
Q	311	87-A30-190-080	TR,CC5551	A.....
Q	312	87-A30-190-080	TR,CC5551	A.....
Q	314	87-A30-255-010	TR,2SB1342	A.....
Q	313	87-A30-255-010	TR,2SB1342	A.....
Q	315	87-A30-256-010	TR,2SD1933	A.....
Q	316	87-A30-256-010	TR,2SD1933	A.....
Q	403	87-A30-075-080	C-TR,2SA1235F	A.....
Q	407	87-A30-190-080	TR,CC5551	A.....
Q	409	87-A30-255-010	TR,2SB1342	A.....
Q	408	87-A30-256-010	TR,2SD1933	A.....
Q	410	87-A30-119-040	C-TR,2SC3906K R	A.....
Q	504	87-A30-075-080	C-TR,2SA1235F	A.....
Q	502	87-A30-075-080	C-TR,2SA1235F	A.....
Q	506	87-A30-076-080	C-TR,2SC3052F	A.....
Q	503	87-A30-076-080	C-TR,2SC3052F	A.....
Q	507	87-A30-076-080	C-TR,2SC3052F	A.....
Q	505	87-A30-076-080	C-TR,2SC3052F	A.....
Q	508	87-A30-190-080	TR,CC5551	A.....
Q	509	87-A30-256-010	TR,2SD1933	A.....
Q	501	87-A30-257-080	C-TR,2SD1306E	A.....
Q	511	87-A30-119-040	C-TR,2SC3906K R	A.....
Q	510	87-A30-255-010	TR,2SB1342	A.....
R	225	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	227	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	228	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	226	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	239	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	242	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	521	87-A00-258-080	RES,M/F 0.22-1W J	A.....
R	520	87-A00-258-080	RES,M/F 0.22-1W J	A.....



# ELECTRICAL MAIN PARTS LIST - 1/3 (TUNER: ZZA-1)

NOTE: The characters in the suffix column indicate the part usage.

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
C	701	87-010-381-080	0E CAP, ELECT 330-16V	ABCDEF GH
C	702	87-010-404-080	0E CAP, ELECT 4.7-50V	ABCDEF GH
C	711	87-010-260-080	0E CAP, ELECT 47-25V	ABCD.FGH
C	711	87-010-553-080	0E CAP, E 47-16	...E
C	712	87-010-831-080	0E C-CAP, U 0.1-16F	ABCDEF GH
C	718	87-012-179-080	0E C-CAP, U 20P-50 CH	.BCD
C	727	87-010-196-080	0E CHIP CAPACITOR, 0.1-25	ABCDEF GH
C	728	87-010-248-080	0E CAP, ELECT 220-10V	ABCDEF GH
C	721	87-012-176-080	0E CAP 15P	ABCDEF GH
C	722	87-012-176-080	0E CAP 15P	ABCDEF GH
C	720	87-012-195-080	0E C-CAP, U 100P-50CH	ABCDEF GH
C	729	87-012-274-080	0E CHIP CAP, U 1000P-50B	ABCDEF GH
C	725	87-018-131-080	0E CAP, CER 1000P-50V	...FG
C	805	87-012-286-080	0E CAP, U 0.01-25	ABCDEF GH
C	806	87-012-286-080	0E CAP, U 0.01-25	ABCDEF GH
CN	701	87-A60-650-010	1A CONN, 16P H GRY TUC-P16X-C1	...F
CN	701	87-A60-700-010	0E CONN, 13P H GRY TUC-P13X-C1	ABCDE.GH
D	721	87-017-149-080	0E ZENER, HZS6A2L	.BCDEF GH
D	722	87-020-465-080	0E DIODE, 1SS133 (110MA)	...FG
D	721	87-A40-234-080	0E ZENER, MTZJ5.6A	A
IC	721	87-070-127-110	1C IC, LC72131 D	ABCDEF GH
Q	713	87-A30-072-080	0E C-TR, RT1P 144C	...E
Q	712	87-A30-072-080	0E C-TR, RT1P 144C	...E
Q	711	87-A30-196-080	0E TR, 2SC4115SRS	A
Q	711	87-A30-234-080	0E TR, CSC4115BC	.BCDEF GH
X	721	87-A70-061-010	1A VIB, XTAL 4.500MHZ CSA-309	ABCDEF GH
C	872	87-010-400-080	0E CAP, ELECT 0.47-50V	AB...H
C	873	87-010-404-080	0E CAP, ELECT 4.7-50V	AB...H
C	877	87-012-278-080	0E C-CAP, U 2200P-50 B	AB...H
C	878	87-012-278-080	0E C-CAP, U 2200P-50 B	AB...H
C	889	87-010-248-080	0E CAP, ELECT 220-10V	AB...H
C	884	87-010-260-080	0E CAP, ELECT 47-25V	AB...H
C	883	87-010-404-080	0E CAP, ELECT 4.7-50V	AB...H
C	885	87-010-545-080	0E CAP, ELECT 0.22-50V	A...H
C	886	87-010-545-080	0E CAP, ELECT 0.22-50V	A...H
C	888	87-010-787-080	0E CAP, U 0.022-25	AB...H
C	881	87-012-141-080	0E CHIP-CAPACITOR, 0.22-16F	AB...H
C	882	87-012-172-080	0E CAPACITOR CHIP U 10P CH	AB...H
C	887	87-012-286-080	0E CAP, U 0.01-25	AB...H
C	886	87-016-460-080	0E C-CAP, S 0.22-16 B	.B
C	885	87-016-460-080	0E C-CAP, S 0.22-16 B	.B
IC	871	87-070-060-040	1F IC, TA2040AF	AB...H
Q	873	87-026-226-080	0E CHIP-TR, DTA143EK	AB...H
X	891	87-030-394-010	1B VIB, CER CSA3.6MGF228	AB...H
C	705	87-010-213-080	0E C-CAP, S 0.015-50 B	...
C	706	87-010-213-080	0E C-CAP, S 0.015-50 B	...
C	705	87-A10-592-080	0E C-CAP, S 0.015-50 J B	.BCDE
C	706	87-A10-592-080	0E C-CAP, S 0.015-50 J B	.BCDE
C	737	87-010-180-080	0E C-CER 1500P	...
C	734	87-010-180-080	0E C-CER 1500P	...
C	733	87-010-180-080	0E C-CER 1500P	...
C	738	87-010-180-080	0E C-CER 1500P	...
C	735	87-010-213-080	0E C-CAP, S 0.015-50 B	...
C	736	87-010-213-080	0E C-CAP, S 0.015-50 B	...
C	736	87-010-987-080	0E C-CAP, S 1500P-50 CH	.BCDE
C	734	87-010-987-080	0E C-CAP, S 1500P-50 CH	.BCDE
C	733	87-010-987-080	0E C-CAP, S 1500P-50 CH	.BCDE
C	735	87-010-987-080	0E C-CAP, S 1500P-50 CH	.BCDE
C	733	87-012-280-080	0E CAP, U 3300P-50	...FG
C	734	87-012-280-080	0E CAP, U 3300P-50	...FG
C	737	87-A10-592-080	0E C-CAP, S 0.015-50 J B	.BCDE
C	738	87-A10-592-080	0E C-CAP, S 0.015-50 J B	.BCDE
C	752	87-010-220-080	0E C-CAP, S 0.018-25 B	.B.E
C	751	87-010-220-080	0E C-CAP, S 0.018-25 B	.B.E
C	758	87-012-167-080	0E C-CAP, U 5P-50 CH	ABCDEF GH
C	757	87-012-188-080	0E C-CAP, U 47P-50 CH	ABCDEF GH
C	753	87-012-195-080	0E C-CAP, U 100P-50CH	...FG
C	752	87-012-282-080	0E CAP, U 4700P-50	...FG
C	756	87-012-286-080	0E CAP, U 0.01-25	ABCDEF GH
C	752	87-012-365-080	0E C-CAP, S 0.027-25VBK	.CD
C	751	87-012-365-080	0E C-CAP, S 0.027-25VBK	.CD
C	766	87-010-197-080	0E CAP, CHIP 0.01 DM	...FG
C	769	87-010-260-080	0E CAP, ELECT 47-25V	ABCDEF GH
C	765	87-012-286-080	0E CAP, U 0.01-25	ABCDEF GH
C	768	87-012-286-080	0E CAP, U 0.01-25	ABCDEF GH
C	764	87-012-337-080	0E C-CAP, U 56P-50 CH	ABCDE.H
C	774	87-010-263-080	0E CAP, ELECT 100-10V	ABCDEF GH
C	771	87-010-383-080	0E CAP, ELECT 33-25V	ABCDEF GH
C	777	87-010-400-080	0E CAP, ELECT 0.47-50V	ABCDE.H
C	775	87-010-404-080	0E CAP, ELECT 4.7-50V	ABCDEF GH
C	777	87-010-493-040	0E CAP, E 0.47-50 GAS	...
C	777	87-010-493-080	0E CAP, E 0.47-50 GAS	...FG
C	770	87-010-829-080	0E CAP, U 0.047-16	ABCDEF GH
C	780	87-010-196-080	0E CHIP CAPACITOR, 0.1-25	ABCDEF GH
C	785	87-010-401-080	0E CAP, ELECT 1-50V	ABCDEF GH
C	786	87-010-401-080	0E CAP, ELECT 1-50V	ABCDEF GH

# ELECTRICAL MAIN PARTS LIST - 2/3 (TUNER: ZZA-1)

C	786	87-010-405-080	OE	CAP, ELECT 10-50V	ABCDEFHGH.....
C	785	87-010-405-080	OE	CAP, ELECT 10-50V	ABCDEFHGH.....
C	786	87-010-494-080	OE	CAP ELECT GAS 1/50	....E.....
C	785	87-010-494-080	OE	CAP ELECT GAS 1/50	....E.....
C	788	87-012-275-080	OE	C-CAP,U 1200P-50 B	ABCDEFHGH.....
C	787	87-012-275-080	OE	C-CAP,U 1200P-50 B	ABCDEFHGH.....
C	784	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	796	87-010-403-080	OE	CAP, ELECT 3.3-50V	ABCDEFHGH.....
C	794	87-010-406-080	OE	CAP, ELECT 22-50	ABCDEFHGH.....
C	795	87-010-596-080	OE	CAP, S 0.047-16	..CDEFG.....
C	793	87-012-273-080	OE	C-CAP,U 820P-50 B	ABCDEFHGH.....
C	797	87-012-276-080	OE	CAP, CHIP SS 1500 PBK	A...FGH.....
C	798	87-012-276-080	OE	CAP, CHIP SS 1500 PBK	A...FGH.....
D	771	87-020-465-080	OE	DIODE,1SS133 (110MA)	ABCDEFHGH.....
D	773	87-A40-291-080	OE	DIODE,1N4148 (CPT)	.....
IC	771	87-A20-913-010	1D	IC,LA1837NL	ABCDEFHGH.....
L	771	87-A50-266-010	1A	COIL,FM DET-2N(TOK)	ABCDEFHGH.....
L	772	87-A90-052-010	1C	FLTR,CFMT-450A(TOK)	....E.....
L	772	87-A90-053-010	1C	FLTR,PCFMT-060(TOK)	AB.....H.....
L	772	87-A90-733-010	1A	FLTR,PCFAZH-450(TOK)	.....
L	772	87-A91-110-010	1B	FLTR,PCFJZH-450(TOK)	..CD.FG.....
L	781	87-005-847-080	OE	COIL,2.2UH(CECS)	....FG.....
L	791	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	....FG.....
L	792	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	....FG.....
X	771	87-030-354-010	1A	VIB,CF BFU 450C	....E.....
C	859	87-012-286-080	OE	CAP, U 0.01-25	....F.....
C	865	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	....F.....
C	866	87-010-405-080	OE	CAP, ELECT 10-50V	....F.....
C	864	87-010-405-080	OE	CAP, ELECT 10-50V	....F.....
C	869	87-012-180-080	OE	C-CAP,U 22P-50 CH	....F.....
C	868	87-012-184-080	OE	C-CAP,U 33P-50 CH	....F.....
C	862	87-012-199-080	OE	CAP 220P	....F.....
C	861	87-012-199-080	OE	CAP 220P	....F.....
C	863	87-012-270-080	OE	CAP, U 470P-50	....F.....
C	867	87-012-286-080	OE	CAP, U 0.01-25	....F.....
IC	851	87-A20-440-040	1H	C-IC,BU1920FS	....F.....
L	851	87-005-847-080	OE	COIL,2.2UH(CECS)	....F.....
Q	853	87-A30-076-080	OE	C-TR,2SC3052F	....F.....
X	851	87-A70-091-010	1B	VIB,XTAL 4.332MHZ CSA-309	....F.....
C	801	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	809	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	802	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	803	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	804	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	808	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	807	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	810	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	820	87-010-260-080	OE	CAP, ELECT 47-25V	ABCDEFHGH.....
C	893	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	894	87-012-286-080	OE	CAP, U 0.01-25	ABCDEFHGH.....
C	942	87-012-168-080	OE	C-CAP,U 6P-50 CH	....FG.....
C	942	87-012-172-080	OE	CAPACITOR CHIP U 10P CH	.....
C	941	87-012-180-080	OE	C-CAP,U 22P-50 CH	....E.....
C	944	87-014-049-080	OE	CAP,PP 470P-100 J	.....
C	944	87-014-051-080	OE	CAPACITOR (PP), 560P	....E.....
C	949	87-A10-039-080	OE	C-CAP,U 470P-50 J CH	....FG.....
C	958	87-010-197-080	OE	CAP, CHIP 0.01 DM	....FG.....
C	956	87-010-263-080	OE	CAP, ELECT 100-10V	....E.....
C	959	87-010-831-080	OE	C-CAP,U,0.1-16F	....EFG.....
C	954	87-012-358-080	OE	C-CAP,S 0.47-10 F Z	....E.....
C	950	87-014-073-080	OE	CAP,PP 4700P-100 J	....E.....
C	963	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	ABCDEFHGH.....
C	962	87-010-401-080	OE	CAP, ELECT 1-50V	....FG.....
C	964	87-012-170-080	OE	C-CAP,U 8P-50 CH	A.....
C	961	87-012-174-080	OE	CAP CHIP CERA SS 12P CHJ	.BCD...H.....
C	960	87-012-350-080	OE	C-CAP,1-25 F	....E.....
CF	802	82-785-747-010	1A	CF MS2 GHY R	....FG.....
CF	802	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCDE..H.....
CF	801	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCDE..H.....
CF	801	87-008-423-010	1A	CERAMIC FILTER, SFE10.7	....FG.....
D	944	87-020-465-080	OE	DIODE,1SS133 (110MA)	....EFG.....
D	942	87-A40-270-080	OE	C-DIODE,MC2838	....FG.....
D	981	87-A40-618-080	1B	VARI-CAP,SVC 348(S/T)	....E.....
FFE	801	A8-6ZA-190-030	OE	6ZA-1 FEUNM	.....
FFE	801	A8-6ZA-191-130	OE	6ZA-1 FEENM	....FG.....
FFE	801	A8-6ZA-192-030	2Y	6ZA-1 FEJNM	.B.....
FFE	801	A8-6ZA-193-130	OE	6ZA-1 FEVNM	.....
FFE	801	A8-6ZA-199-170	OE	6ZA-1 FEENC	.....
FFE	801	A8-6ZA-19A-070	OE	6ZA-1 FEJNC	.....
FFE	801	A8-6ZA-19D-070	1H	6ZA-1 YFEJNC	A.....H.....
FFE	801	A8-8ZA-190-030	OE	8ZA-1 FEUNM	..C.E.....
FFE	801	A8-8ZA-192-070	OE	8ZA-1 FEUNC	.....
FFE	801	A8-8ZA-193-070	1E	8ZA-1 YFEUNC	....D.....
J	801	87-033-241-010	1B	TERMINAL,ANT AJ-2039	....FG.....
J	801	87-A60-702-010	1B	TERMINAL,ANT 4P CJ-9036	ABCD...H.....
J	801	87-A60-703-010	1A	TERMINAL,ANT 3P CJ-9037	....E.....
J	940	81-754-629-010	OE	CONNECTOR, 2P	....E.....
L	832	87-005-847-080	OE	COIL,2.2UH(CECS)	....FG.....
L	943	87-005-372-080	OE	COIL S 1MHM	.....
L	942	87-A50-019-010	OE	COIL,OSC LW(COI)	....FG.....
L	941	87-A50-020-010	OE	COIL,ANT LW(COI)	....FG.....
L	941	87-A50-022-010	OE	COIL,ANT SW(COI)	....E.....

ELECTRICAL MAIN PARTS LIST - 3/3 (TUNER: ZZA-1)

L	944	87-A50-159-010	0E	COIL,10MH K C2B	.....E.....
L	942	87-A50-173-010	0E	COIL,OSC SW-N(COI)	.....E.....
L	943	87-A50-432-010	0E	COIL,1MH K CW	.....E.....
L	981	87-A50-430-010	0E	COIL,ANT MW(3BSW)	.....E.....
L	982	87-A50-431-010	0E	COIL,OSC MW(3BSW)	.....E.....
L	981	87-NF4-650-010	1D	COIL,AM PACK 4N(TOK)	A.....
L	981	87-NF4-651-010	1C	COIL,AM PACK2N(TOM)	.....
L	981	88-NF8-625-110	1D	COIL,AM PACK3N(TOK)	.....
L	981	8Z-ZA1-664-010	1D	COIL,AM PACK 4(TOK)	.BCD...H.....
L	981	8Z-ZA1-665-010	1E	COIL,AM PACK 2(TOK)	.....FG.....
Q	712	87-A30-072-080	0E	C-TR,RT1P 144C	ABCD.FGH.....
Q	805	89-327-143-080	0E	TR,2SC2714 (0.1W)	ABCDEFGH.....
Q	942	87-A30-075-080	0E	C-TR,2SA1235F	.....E.....
Q	943	87-A30-075-080	0E	C-TR,2SA1235F	.....E.....
Q	949	87-A30-076-080	0E	C-TR,2SC3052F	.....E.....
Q	945	87-A30-076-080	0E	C-TR,2SC3052F	.....E.....
Q	944	87-A30-076-080	0E	C-TR,2SC3052F	.....E.....
Q	948	87-A30-086-070	0E	C-TR,CSD1306E	.....EFG.....
Q	947	89-503-602-080	1A	C-FET,2SK360E	.....E.....
Q	947	89-505-434-540	0E	C-FET,2SK543(4/5)	.....FG.....
Q	951	87-A30-074-080	0E	C-TR,RT1P 141C	.....EFG.....
TC	942	87-011-164-010	0E	CAPACITOR,TRIMMER 30P	.....FG.....
TC	941	87-011-173-010	1A	CERAMIC TRIMMER 20P	.....
TC	941	87-011-220-080	1A	TRIMMER CAP 20P VTC	.....E.....
TC	943	87-011-221-080	1A	CAP, TRIMMER 30P	.....E.....

# MECHANICAL PARTS LIST-1/2

NOTE: The characters in the suffix column indicate the part usage.

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
KSTE	.....	XX	.....	C
EZSTE	.....	XX	.....	D
EZSTM	.....	XX	.....	E
		KANRI		
		KANRI		
	82-NE6-067-010		BADGE,AIWA 30N	ABCDE
	86-NFZ-001-010		WINDOW, TOP	ABCDE
	8Z-NB8-011-110		PANEL, LEFT V-2	ABCDE
	8Z-NF8-003-010		BOX, CASS 1U	A
	8Z-NF8-004-010		BOX, CASS 2U	A..E
	8Z-NF8-021-010		WINDOW, CASS 1	AB..E
	8Z-NF8-022-010		WINDOW, CASS 2	AB..E
	8Z-NF8-024-010		WINDOW, CD	AB..E
	8Z-NF8-025-010		PANEL, TRAY U	ABCDE
	8Z-NF8-037-010		BOX, CASS 1H	.B..E
	8Z-NF8-038-010		BOX, CASS 2H	.B...
	8Z-NF9-042-010		PANEL, TOP V-2	ABCDE
	8Z-NF9-043-010		PANEL, RIGHT S V-2	ABCDE
	8Z-NFV-003-010		WINDOW, DISP U	A
	8Z-NFV-004-010		WINDOW, DISP H	.B
	8Z-NFV-005-010		WINDOW, DISP E	...E
	8Z-NFV-006-010		CABI, FR U	A
	8Z-NFV-011-010		CABI, FR E	...E
	8Z-NFV-013-010		CABI, FR LH	.B
	8Z-NFV-013-110		CABI, FR LH	...
	8Z-NFV-021-010		CABI, REAR USTNM	A
	8Z-NFV-022-010		CABI, REAR KSTE	..C
	8Z-NFV-023-010		CABI, REAR EZSTE	..D
	8Z-NFV-026-010		CABI, REAR LHSTM	.B
	8Z-NFV-027-010		CABI, REAR EZSTM	...E
	8Z-NF8-005-010		KEY, POWER	AB
	8Z-NF8-005-110		KEY, POWER	...E
	8Z-NF8-006-010		KEY, CD	AB..E
	8Z-NF8-007-010		REFLECTOR, ECO	AB..E
	8Z-NF8-008-010		KEY, TIMER	AB..E
	8Z-NF8-010-010		KEY, ASSY FUN	AB..E
	8Z-NF8-013-010		KEY, ASSY PLAY	.B..E
	8Z-NF8-016-010		KEY, ASSY PAUSE	AB..E
	8Z-NF8-020-010		KEY, RDS	...E
	8Z-NF8-026-010		KNOB, RTRY JOG	AB..E
	8Z-NF8-027-010		KNOB, RTRY VOL	AB..E
	8Z-NF8-028-010		KNOB, RTRY MIC	AB..E
	8Z-NF8-029-010		REFLECTOR, JOG	AB..E
	8Z-NF8-030-010		KEY, ASSY PLAY U	A
	8Z-NF8-050-010		KEY, KARAOKE	AB..E
	8Z-NFV-001-010		KEY, PRO	.B
	8Z-NFV-010-010		KEY, PRO U	A..E
	81-532-080-010		LABEL, CASS. COMPT	AB..E
	87-NF6-616-010		CONN ASSY, 8P RPB	.B
	84-ZG1-245-210		CAP, OPTICAL	ABCDE
	82-NF5-218-010		SPR-T, EJECT 1 (SIN)	ABCDE
	82-NF5-219-010		SPR-T, EJECT 2 (SIN)	ABCDE
	82-NF5-229-010		PLATE, LOCK	AB..E
	86-NF9-224-010		SPR-C, LOCK	AB..E
	87-NF4-216-010		HLDR, LOCK 1	AB..E
	87-NF4-217-010		HLDR, LOCK 2	AB..E
	87-NF4-221-010		HLDR, CABLE	ABCD
	87-NF8-220-010		DMPR, 150	AB..E
	88-NF5-208-010		HLDR, PWB-M N	ABCDE
	8Z-NB8-216-010		HLDR, FAN	...
	8Z-NB8-240-010		COVER, PL	ABCDE
	8Z-NF8-205-010		HLDR, HT-SINK	.B
	8Z-NF8-205-110		HLDR, HT-SINK	..CDE
	8Z-NF9-204-010		PLATE, MIC	AB..E
	8Z-NFV-002-010		PLATE, PRO	...E
	8Z-NFV-203-010		HLDR, HT F	A
	8Z-NFV-204-010		HLDR, HT R	A
	87-067-581-010		TAPPING SCREW, BVT2+3-15	.B..E
	87-067-584-010		TAPPING SCREW, BVT2+3-6	...
	87-067-641-010		UTT2+3-8 (W/O SLOT)BL	...E
	87-067-688-010		BVTT+3-6	ABCDE
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABCDE
	87-067-758-010		BVT2+3-12 W/O SLOT	.B
	87-067-822-010		BVT2+3-20 W/O SLOT	A..CDE
	87-067-873-010		BVT2+3-25 W/O SLOT	...
	87-078-191-010		S-SCREW, IT+4-10	ABCDE
	87-721-096-410		QT2+3-10 GLD	ABCDE
	87-721-097-410		QT2+3-12 GLD	ABCDE
	87-B10-091-010		UTT2+3-10 W/O BLK	ABCDE
	87-B10-184-010		BVTT+3-20 W/O SLOT	...E
	87-NF4-224-010		S-SCREW, IT3B+3-8 CU	ABCDE
	87-050-034-010		AC CORD ASSY, E	.CD
	87-050-079-010		AC-CORD ASSY, E	.B..E
	87-085-185-010		BUSHING, AC CORD (E)	.BCDE
	87-085-189-010		BUSHING, CORD (U)	A
	87-099-811-010		PLUG, ADPTR CONV(K)	..C
	87-A80-110-010		AC CORD ASSY, U SPT-2W	A
	87-A90-796-010		FAN, F614R-12MC-15-300MM	ABCDE
	88-906-251-110		FF-CABLE, 6P 1.25	ABCDE

MECHANICAL PARTS LIST-2/2


		88-911-101-110	FF-CABLE, 11P 1.25	A...E.....
		88-913-301-110	FF-CABLE, 13P-1.25	AB..E.....
		88-915-101-110	FF-CABLE, 15P 1.25 100MM	.B.....
		8Z-NFV-604-010	PT, ZNF-28 U	A.....
		8Z-NFV-606-010	PT, ZNF-28 EZ	...DE.....
		8Z-NFV-607-010	PT, ZNF-28 LH	.B.....
		8Z-NFV-608-010	PT, ZNF-28 K	..C.....
C	705	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
		88-NF8-205-010	GUIDE, FL	AB..E.....
WH	1	87-A90-510-010	HLDR, WIRE 2.5-9P	ABCDE.....
		87-067-703-010	TAPPING SCREW, BVT2+3-10	.BCDE.....

# ACCESSORIES / PACKAGE LIST-1/1

NOTE: The characters in the suffix column indicate the part usage.

KSTE	.....	XX	.....	C	.....
EZSTE	.....	XX	.....	D	.....
EZSTM	.....	XX	.....	E	.....
REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX	
	8Z-NFV-902-010		IB,LH(ESP)M	.B	.....
	8Z-NFV-903-010		IB,U(ESF)M	A	.....
	8Z-NFV-905-010		IB,K(E)E	.C	.....
	8Z-NFV-906-010		IB,EZ(9L)E	.D	.....
	8Z-NFV-916-010		IB,EZ(9L)M	.E	.....
	87-006-225-010		AM LOOP ANT NC2	ABCDE	.....
	87-043-106-010		WIRE, FM ANT (Z)	.CDE	.....
	87-043-115-010		ANT,FEEDER FM	AB	.....
	87-099-789-010		PLUG,ADPTR IR44	.B	.....
	8Z-NFV-702-010		RC UNIT,RC-ZAS05	AB	.....
	8Z-NFV-705-010		RC UNIT,RC-ZAS15	.CDE	.....

SCHEMATIC DIAGRAM - 1 (MAIN)

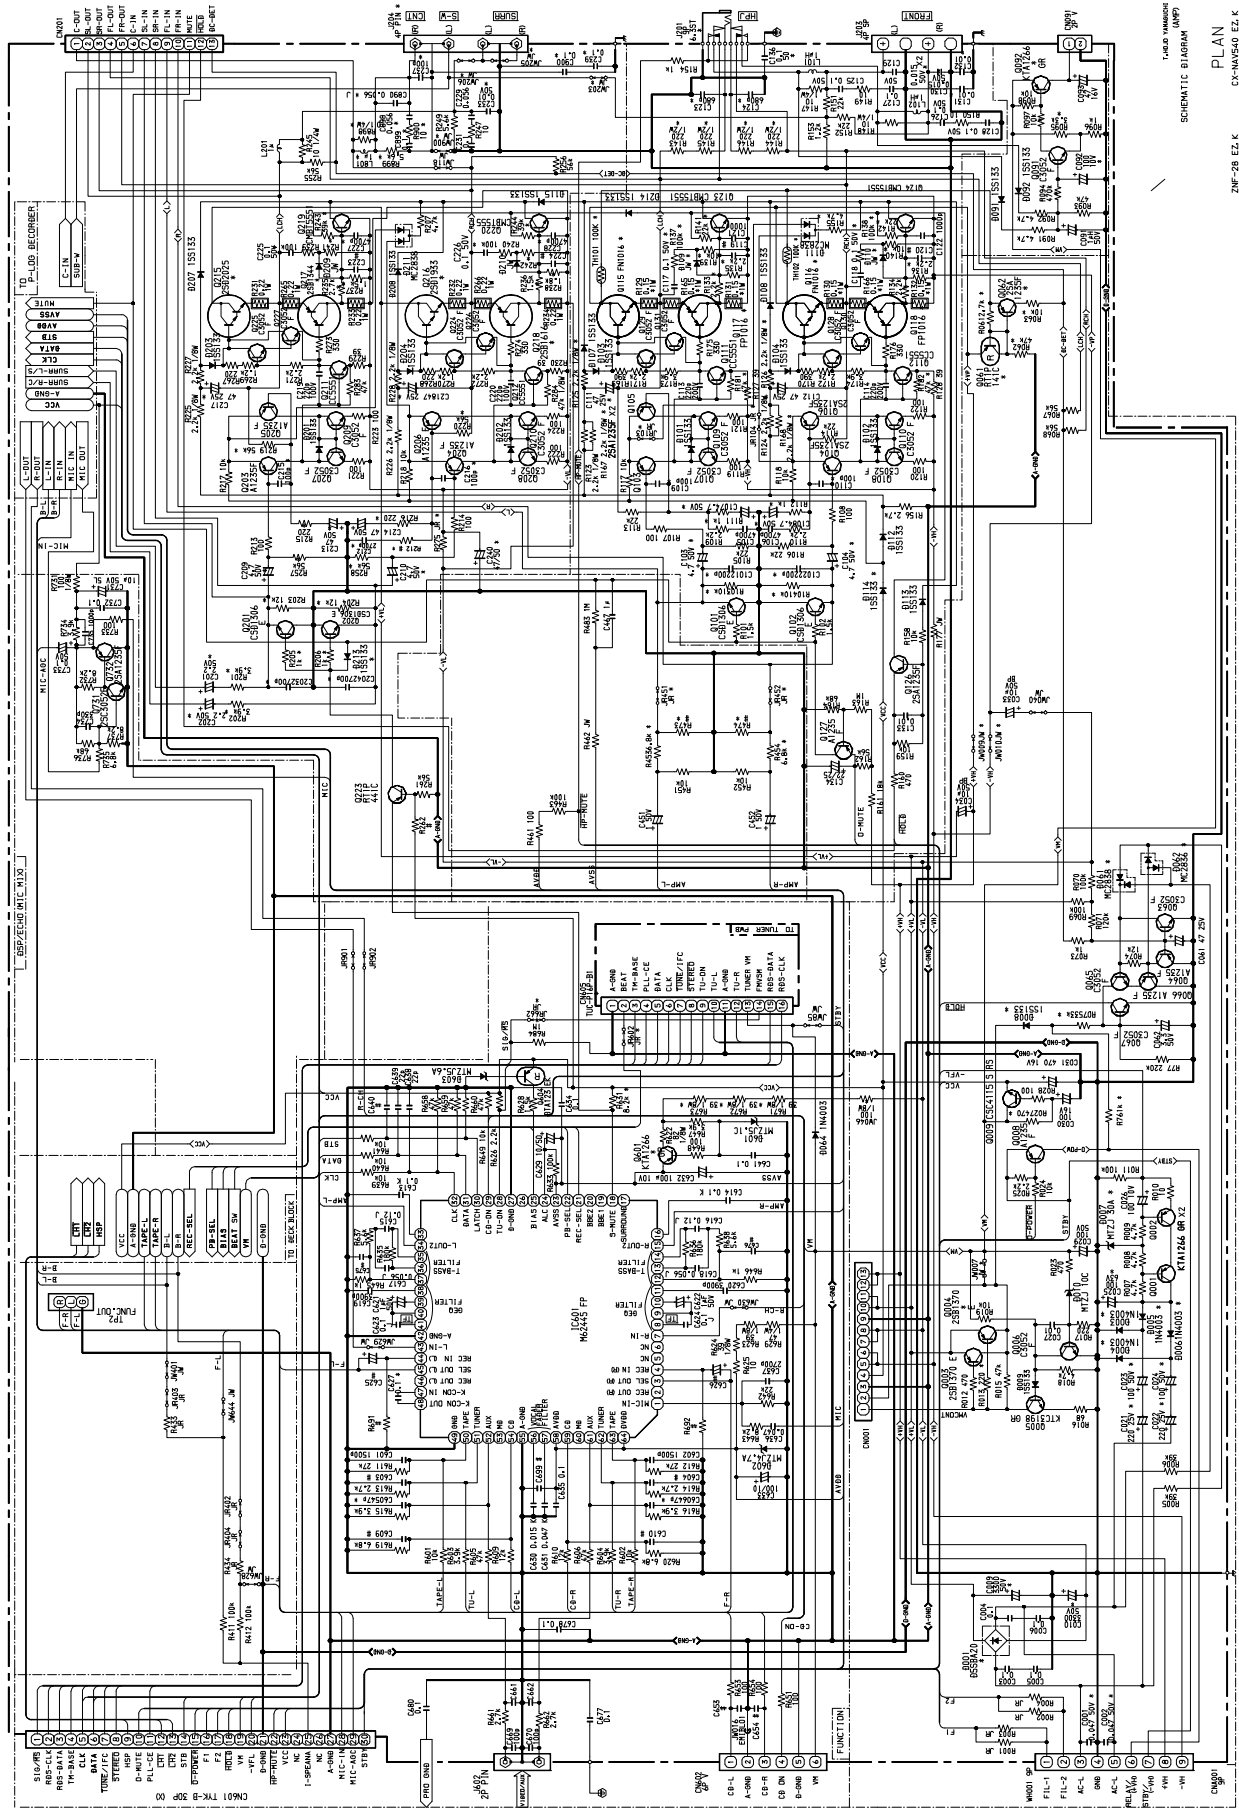

PLAN  
CX-NAUG-00 E2, K  
21 JAN 1959

SCHEMATIC DIAGRAM (MP)  
2NF-28 E2, K

THIRD VARIATION

PLAN

CX-NAUG-00 E2, K

21 JAN 1959

SCHEMATIC DIAGRAM (MP)

2NF-28 E2, K

THIRD VARIATION

PLAN

CX-NAUG-00 E2, K

21 JAN 1959

SCHEMATIC DIAGRAM (MP)

2NF-28 E2, K

THIRD VARIATION

PLAN

CX-NAUG-00 E2, K

21 JAN 1959

SCHEMATIC DIAGRAM (MP)

2NF-28 E2, K

THIRD VARIATION

PLAN


CX-NAUG-00 E2, K

21 JAN 1959





SCHEMATIC DIAGRAM - 3 (MAIN-PROLOGIC)

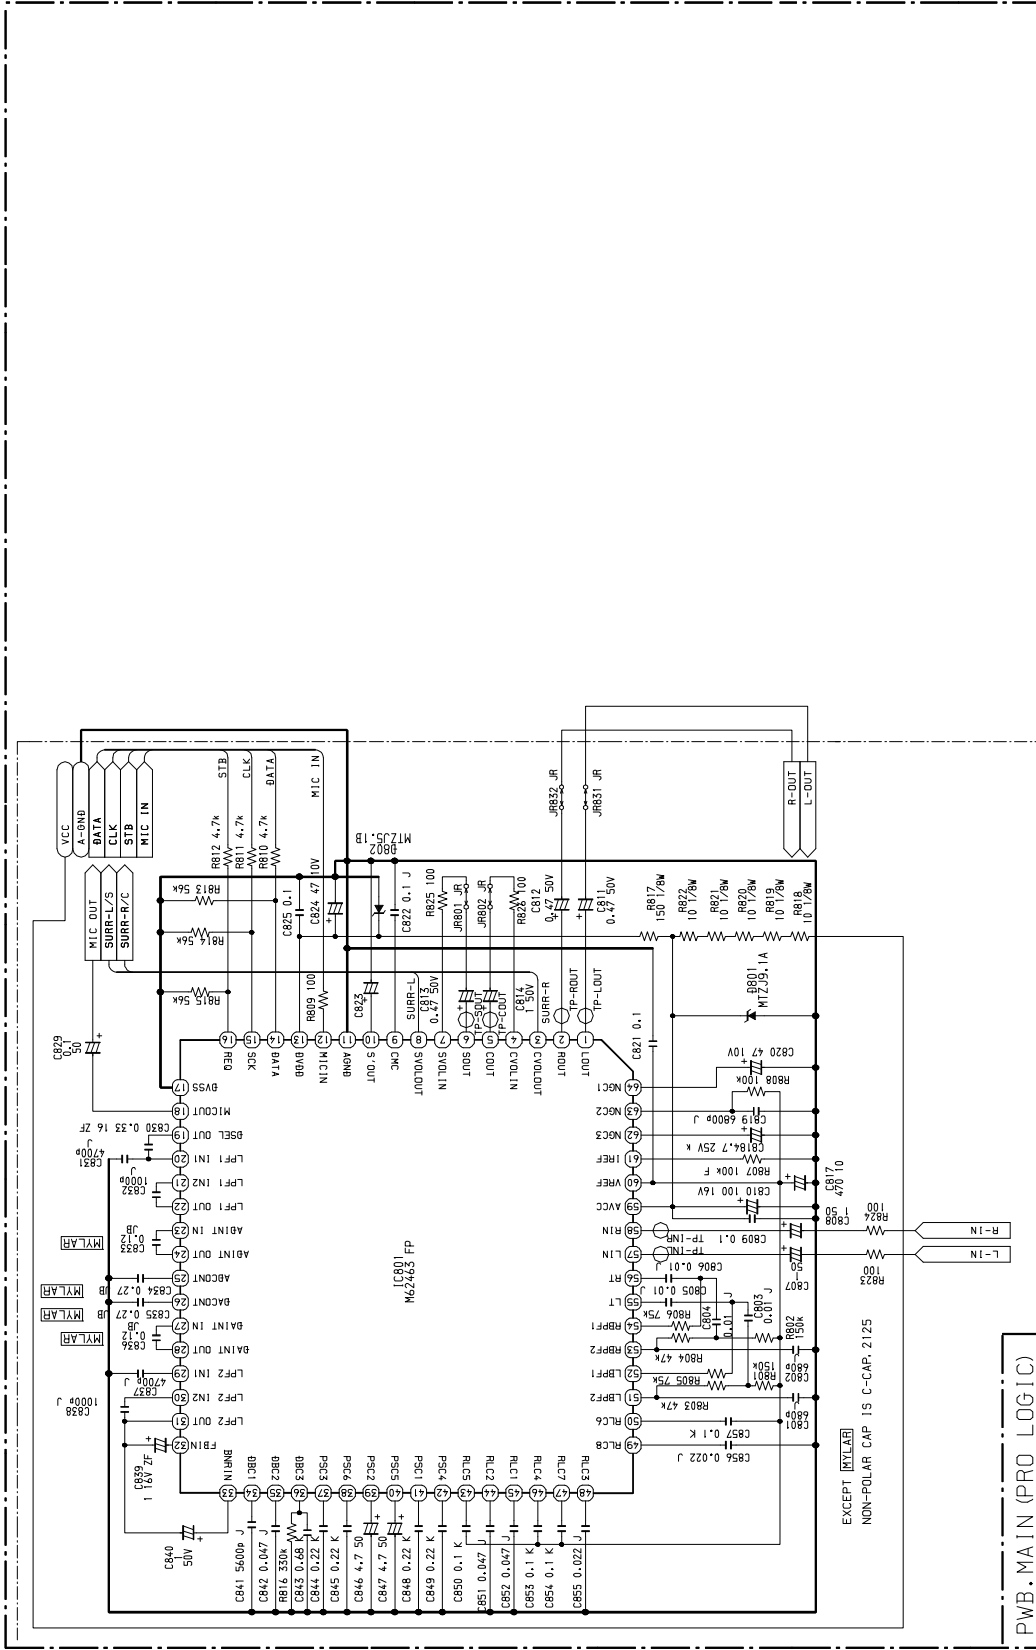


1-SHIMIZU

ZNF-PROLOGIC

20 JAN 1999


0-ZNF-28-MAIN-EZK (P3)

SCHEMATIC DIAGRAM - 4 (TUNER)

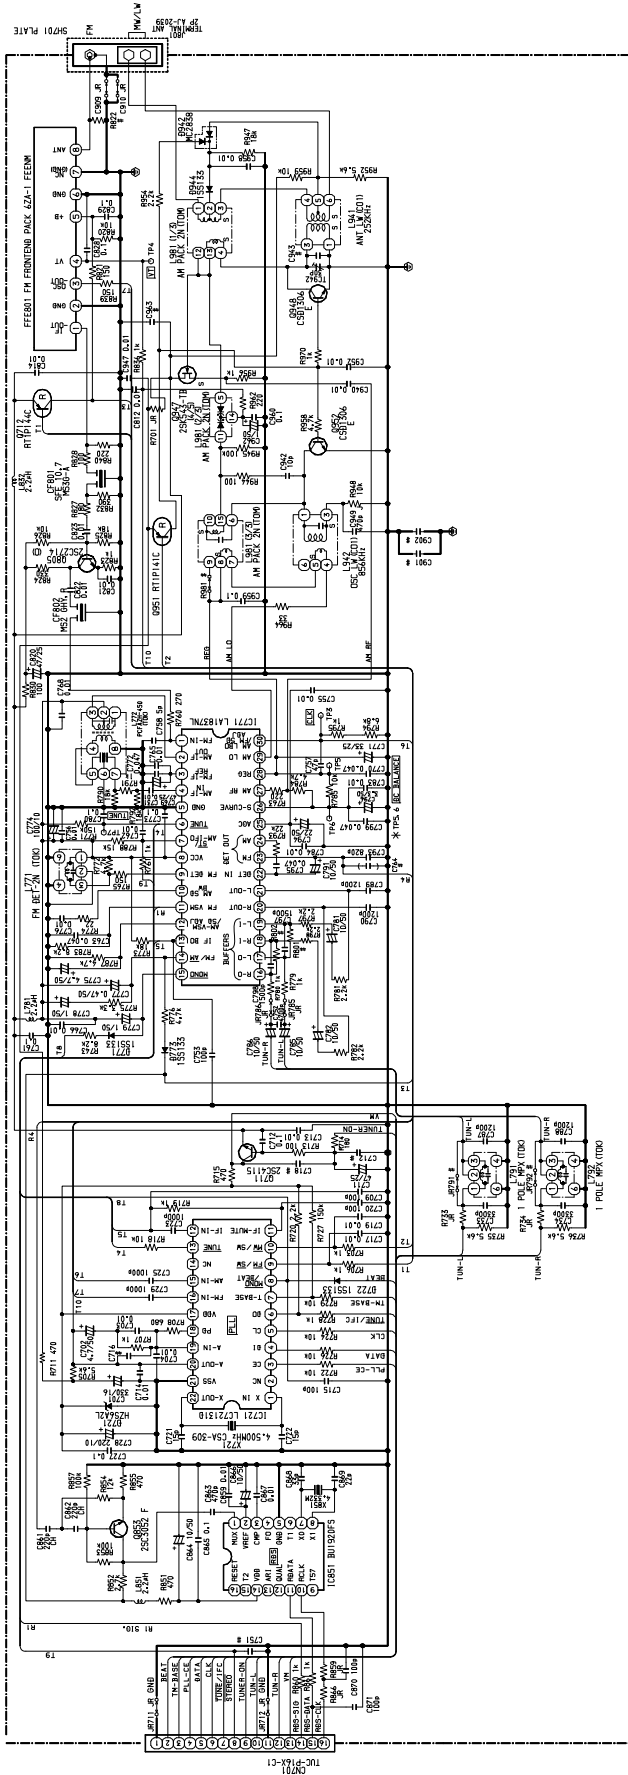

TAGAZAWA  
 9410 1-1-4  
 HALOGEN FREE 100% 62 ZAI 613 01  
 00-822A1-04-1

SCHEMATIC DIAGRAM - 5 (FRONT)

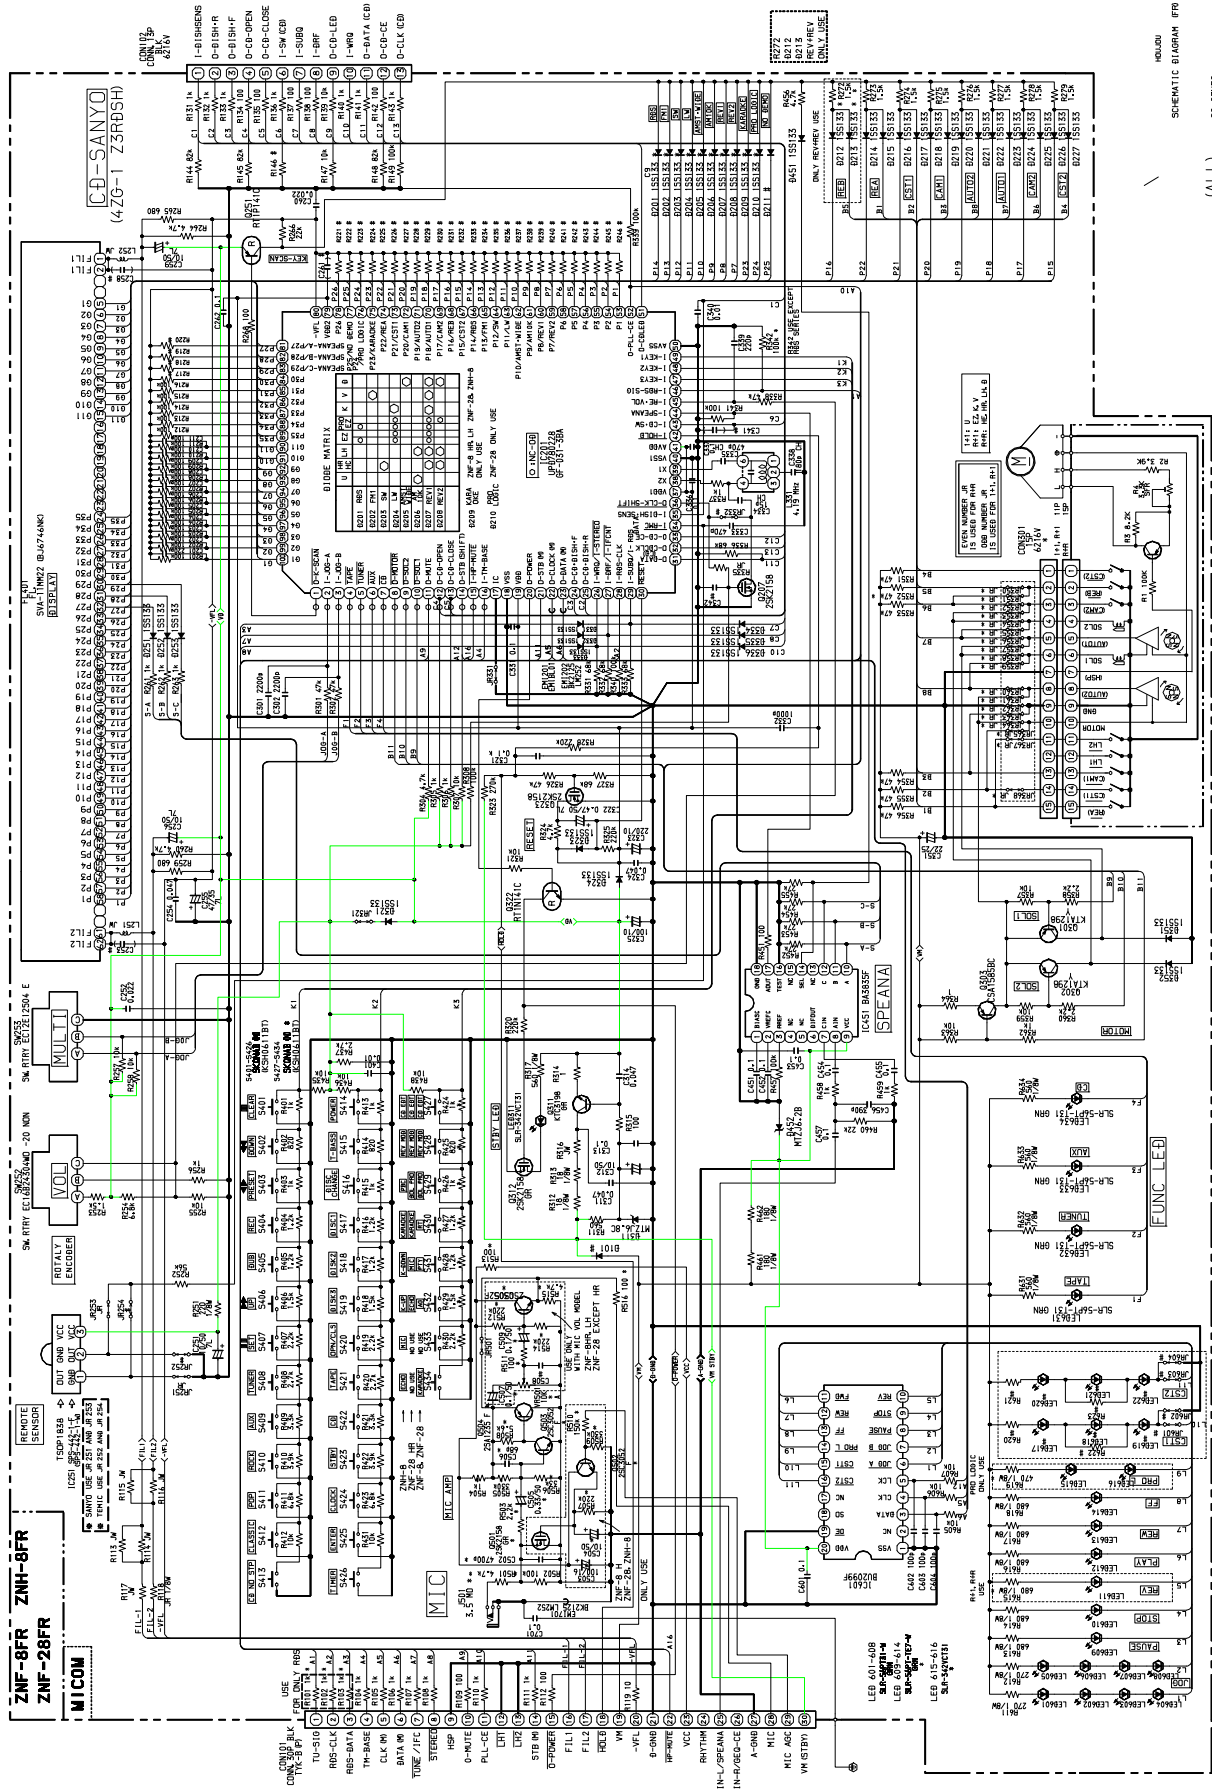


(ALL)

ZNF-8

SCHEMATIC DIAGRAM P70

20 OCT 1990

SCHEMATIC DIAGRAM - 6(PS)

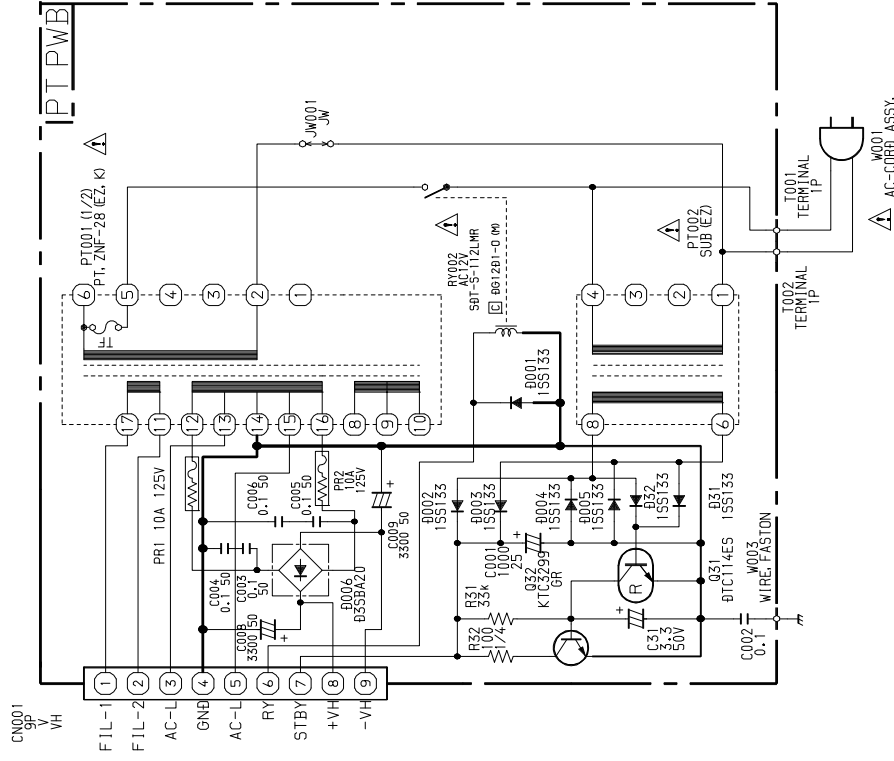

98-12-18  
Y.KINBO

SCHEMATIC DIAGRAM(PT)

ZNF-28 EZ/K/V  
CX-NAV540EZ/K/V  
18 BEC 1998

B-ZNF8-AC-85EZ



サービス技術ニュース	
番号	連絡内容
G- -	
G- -	
G- -	

**アイワ株式会社**  
**AIWA CO.,LTD.**

9820527

Tokyo Japan