



123-STEREO/SM

Service Manual - 123-STEREO/SM

| CONTENTS | PAGE |
|------------------------------------|-------------|
| Safety Instructions | 1 |
| Technical Specifications | 2 |
| Block Diagram | 3 |
| Pin Voltages of IC's | 4 |
| Oscillograms | 8 |
| Electrical and Service Adjustments | 12 |
| Part List | 15 |
| Circuit Diagrams | Attached |

SAFETY INSTRUCTIONS

GENERAL GUIDELINES

1. It is advised to insert an isolation transformer in the AC supply before servicing a hot chassis.
2. Potentials as high as 33KV are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by any one who is not competent with the precautions necessary when working on the high voltage equipment. Always discharge the anode of the tube.
3. When servicing observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all the parts which have been overheated or damaged by the short circuit.
4. Always use the manufacturer's replacement safety components. The critical safety components marked with Δ on the schematics diagrams should not be replaced by other substitutes. Other substitute may create the electrical shock, fire or other hazards. Take attention to replace the spacers with the originals. Furthermore where a short circuit has occurred, replace those components that indicate evidence of overheating.
5. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
6. When the receiver is not being used for a long time of period of time, unplug the power cord from the AC outlet.
7. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazard.

LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs of the plug.
2. Turn the receiver's power switch on.
3. Measure the resistance value with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials,

connectors, control shafts etc. When the exposed metallic part a return path to the chassis the reading should be between 4Mohm and the 20Mohm. When the exposed metal does not have a return path to the chassis, the reading must be infinite.

LEAKAGE CURRENT HOT CHECK

1. Plug the AC cord directly in to the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 2Kohm 10W resistor in series with an exposed metallic part on the receiver and an earth, such as a water pipe.
3. Use an AC voltmeter with high impedance to measure the potential across the resistor.
4. Check each exposed metallic part and check the voltage at the each point.
5. Reverse the AC plug at the outlet and repeat each of the above measurements.
6. The potential at the any point should not exceed 1.4 Vrms. In case a measurement is outside the limits specified, there is the possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

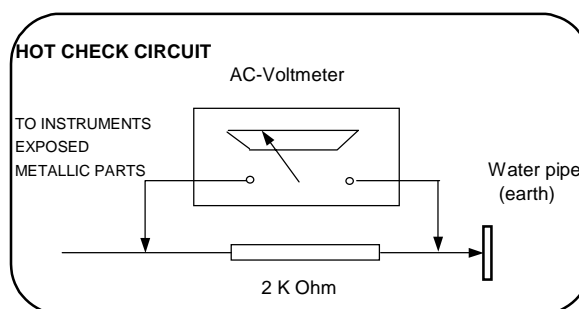


Figure 1

X-RAY RADIATION WARNING

The primary source of X-ray radiation in this receiver is the picture tube. The chassis is specially constructed to limit X-ray radiation. For continued X-ray radiation protection, replace the tube with the same type of the original one.


CAUTION

AFTER REMOVAL OF THE ANODE CAP, DISCHARGE THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR THE CARBON PAINTED ON THE CRT WITH A HIGH VOLTAGE PROBE AND MULTIMETER (SELECT VDC) AND THEN SHORT CIRCUIT DIRECTLY TO DISCHARGE COMPLETELY.

TECHNICAL SPECIFICATIONS

| | | |
|---------------------------------------|--|--|
| Power source: | 220-240V AC, 50-60Hz | |
| Power consumption (max.) : | 95 W | 20", 21" |
| Standby power consumption : | 4 W | |
| Aerial impedance : | 75Ohm, coaxial type | |
| Receiving system ¹: | PAL BG PAL SECAM BG PAL SECAM BG DK PAL SECAM BG LL' PAL I | |
| Receiving channels: | VHF BAND I | CH2-4 |
| | VHF BAND III | CH5-12 |
| | CABLE TV | S1-41 |
| | UHF BAND | CH21-69 |
| Audio outputs : | 2 x 7W RMS at %10 THD | |
| High Voltage : | 25 ± 0.5 KV | 20", 21" |
| Focus voltage : | %25.6 ± %38 of EHT | |
| Grid 2 voltage : | 0-1400 V | |
| Heater voltage : | 6.2 ± 0.2 Vrms | |
| Video/Audio Terminals : | AV1 IN | Video : 1 Vpp, 75 Ohm Audio : 0.5 Vrms, >10 Kohm RGB |
| | AV1OUT | Video : 1 Vpp, 75 Ohm Audio : 0.5 Vrms, <1 Kohm |
| | AV2 IN (optional) | Video : 1 Vpp, 75 Ohm Audio : 0.5 Vrms, >10 Kohm |
| | AV2 OUT (optional) | Video : 1 Vpp, 75 Ohm Audio : 0.5 Vrms, <1 Kohm |
| | AV2 IN (RCA, optional) | Video : 1 Vpp, 75 Ohm Audio : 0.5 Vrms, >10 Kohm |
| Operating temperature : | 0-45 Degrees | |
| Safety : | IEC 65 /BS P2N | |
| X-Ray radiation : | ACC. IEC 65/BS P2N | |

¹ : TV set is produced to receive "one" of these colour and sound systems.

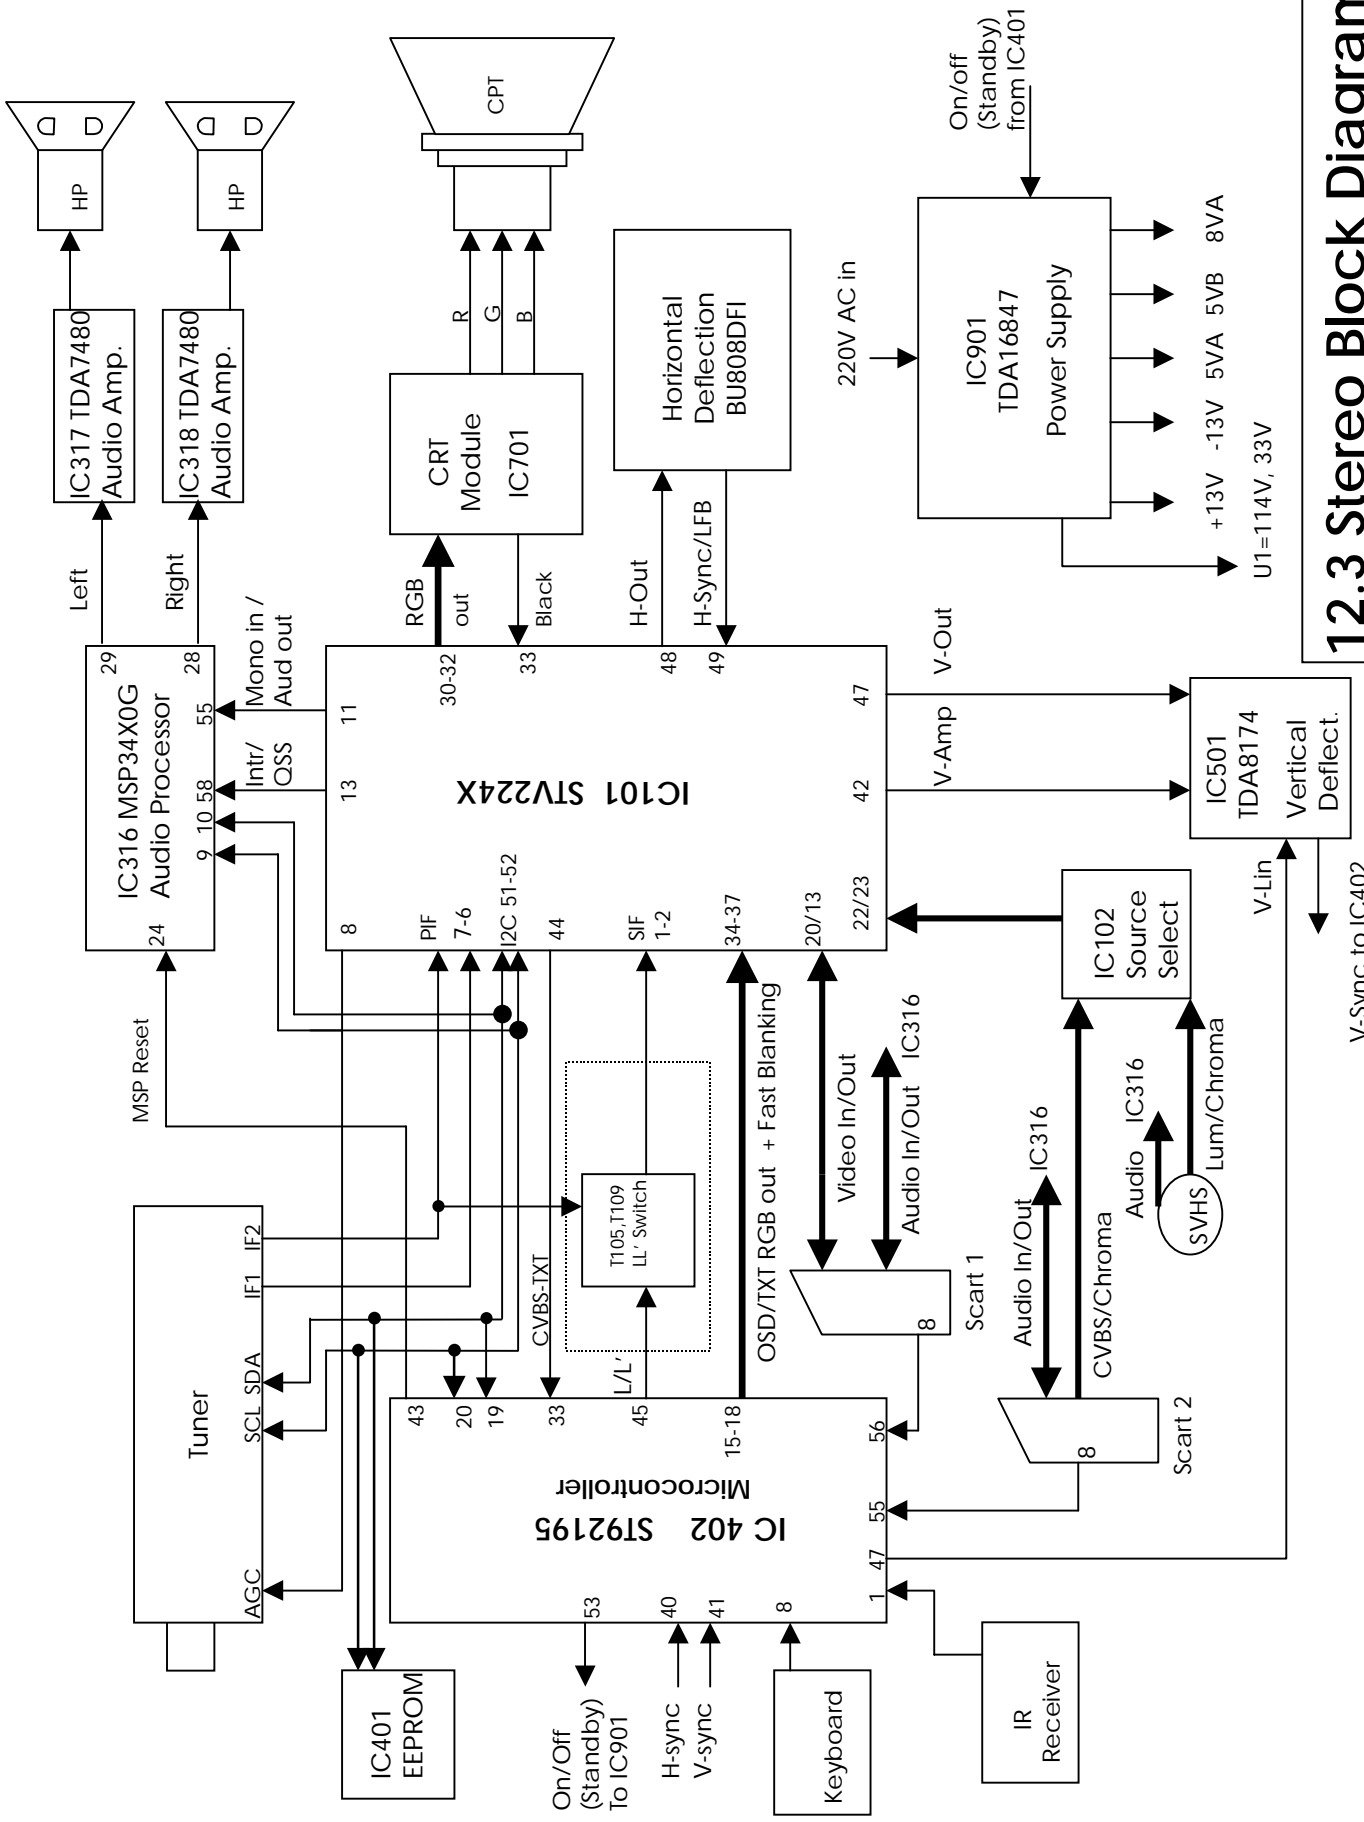

12.3 Stereo Block Diagram

PIN VOLTAGES OF IC'S

| IC101 (STV2246) | | | | | |
|--|---|----------|-----|--|----------|
| BUS CONTROLLED MULTISTANDARD ONE CHIP TV PROCESSOR | | | | | |
| Pin | Connection | V DC (*) | Pin | Connection | V DC (*) |
| 1 | Sound IF Input 1 | 1.0 | 29 | Not connected | 3.9 |
| 2 | Sound IF Input 2 | 1.0 | 30 | Blue Output | 2.3 |
| 3 | AGC SIF Capacitor | 0.1 | 31 | Green Output | 2.2 |
| 4 | IF Voltage Reference Filtering | 3.2 | 32 | Red Output | 2.3 |
| 5 | AGC PIF Capacitor | 0.1 | 33 | Cathode Current Measurement Input | 4.2 |
| 6 | Picture IF Input 1 | 2.5 | 34 | OSD Blue Input | 4.7 |
| 7 | Picture IF Input 2 | 2.5 | 35 | OSD Green Input | 4.8 |
| 8 | AGC Tuner Output | 4.6 | 36 | OSD Red Input | 4.7 |
| 9 | IF PLL Filter | 1.2 | 37 | OSD Fast Blanking | 0.2 |
| 10 | IF Ground | 0.0 | 38 | Cloche Filter Tuning Capacitor | 0.1 |
| 11 | AM/FM Mono Sound Output | 4.2 | 39 | 3.5X MHz Crystal | 0.4 |
| 12 | 5 V IF Supply | 5.1 | 40 | 4.43 MHz Crystal | - |
| 13 | Internal CVBS Output | 3.2 | 41 | Chroma PLL Filter | - |
| 14 | External Audio Input | 2.5 | 42 | Vertical Amplitude DAC Output | 4.0 |
| 15 | LC Input 1 | 4.0 | 43 | Chroma/Scanning Ground | 0.0 |
| 16 | LC Input 2 | 4.0 | 44 | Second Video Switch Output | 4.1 |
| 17 | Video/Luma Supply Voltage (8 V) | 8.1 | 45 | Chroma/Scanning Power Supply (8V) | 8.1 |
| 18 | Internal Video Input | 3.7 | 46 | Beam Current Limiter Control Voltage and Safety Input (XRAY) | 6.8 |
| 19 | Video/Luma Ground | 0.0 | 47 | Vertical Output Pulse | 4.0 |
| 20 | External Video Input | 3.2 | 48 | Horizontal Output Pulse | 1.4 |
| 21 | Black Stretch Capacitor | 2.8 | 49 | Line Flyback Input and Super-sandcastle Output | 0.7 |
| 22 | Y/CVBSIN3 Y(SVHS) or CVBS3 External Input | 3.2 | 50 | Scanning PLL Filter | 4.1 |
| 23 | Chroma (SVHS) Input | 1.8 | 51 | SCL I2C Bus Clock Input | see osc. |
| 24 | Automatic RGB Peak Regulation | 5.0 | 52 | SDA I2C Bus Data Input | see osc. |
| 25 | External Blue Input | 2.5 | 53 | Digital Supply Voltage (5 V) | 5.2 |
| 26 | External Green Input | 1.7 | 54 | Digital Ground | 0.0 |
| 27 | External Red Input | 2.5 | 55 | Main Audio Output | 4.0 |
| 28 | External Fast Blanking Input | 0.0 | 56 | FM Demodulation Capacitor | 1.5 |

IC316 (MSP 34XXG)- MULTI STANDARD SOUND PROCESSOR

| Pin | Connection | V DC | Pin | Connection | V DC |
|-----|---|----------|-----|---|------|
| 1 | Not connected | 2.3 | 33 | Scart 2 sound output (R) | 3.7 |
| 2 | Gnd | 0.0 | 34 | Scart 2 sound output (L) | 3.7 |
| 3 | Gnd | 0.0 | 35 | Reference analog ground | 0.0 |
| 4 | Digital control input/output | 0.0 | 36 | Scart 1 sound output (R) | 3.7 |
| 5 | Digital control input/output | 0.0 | 37 | Scart 1 sound output (L) | 3.7 |
| 6 | Gnd | 0.0 | 38 | Volume capacitor Headphone | 7.1 |
| 7 | Standby (in normal operation it must be high) | 4.9 | 39 | Analog Supply High Voltage (8V) | 8.0 |
| 8 | Not connected | 4.9 | 40 | Volume capacitor Speaker | 7.1 |
| 9 | SCL | see osc. | 41 | Ground for Analog Power Supply High Voltage | 0.0 |
| 10 | SDA | see osc. | 42 | Internal Analog Reference Voltage | 3.7 |
| 11 | Not connected | 0.5 | 43 | Scart 4 input (L) | 3.7 |
| 12 | Not connected | 0.5 | 44 | Scart 4 input (R) | 3.7 |
| 13 | Not connected | 0.5 | 45 | Analog Shield Ground | 0.0 |
| 14 | Not connected | 0.5 | 46 | CINCH - sound input (L) | 3.7 |
| 15 | Not connected | 0.5 | 47 | CINCH - sound input (R) | 3.7 |
| 16 | Not connected | 0.5 | 48 | Analog Shield Ground | 0.0 |
| 17 | ADR Bus Clock Output | 0.5 | 49 | Scart 2 sound input (L) | 3.7 |
| 18 | Digital Circuitry Supply Voltage | 4.9 | 50 | Scart 2 sound input (R) | 3.7 |
| 19 | Digital Circuitry Supply Ground | 0.0 | 51 | Analog Shield Ground | 0.0 |
| 20 | Not connected | 0.5 | 52 | Scart sound 1 input (R) | 3.7 |
| 21 | Not connected (Ground) | 0.0 | 53 | Scart 1 sound input (L) | 3.7 |
| 22 | Not connected (Ground) | 0.0 | 54 | A/D converter ref. Voltage | 2.5 |
| 23 | Not connected (Ground) | 0.0 | 55 | Mono sound input | 3.7 |
| 24 | MSP RESET input | 5.1 | 56 | Ground for Analog Power Supply Voltage | 0.0 |
| 25 | Headphone sound output (R) | 0.1 | 57 | Analog Power Supply Voltage (5V) | 4.9 |
| 26 | Headphone sound output (L) | 0.1 | 58 | IF input 1 | 1.5 |
| 27 | Reference analog ground | 0.0 | 59 | IF Common reference for IF IN1/IN2 | 1.5 |
| 28 | Speaker output (R) | 0.1-2.1 | 60 | IF input 2 | 0.0 |
| 29 | Speaker output (L) | 0.1-2.1 | 61 | Factory test mode enable (ground) | 0.0 |
| 30 | Not connected | 0.1-2.1 | 62 | Crystal oss. input | 2.3 |
| 31 | Not connected | 0.1-2.1 | 63 | Crystal oss. output | 2.3 |
| 32 | Not connected | 0.1-2.1 | 64 | Not connected (Ground) | 0.0 |

IC317, IC318 (TDA7480) Audio Output IC

| Pin | Connection | V DC | Pin | Connection | V DC |
|-----|----------------------------------|-------|-----|------------------------------|-----------|
| 1 | Negative supply (-13V) | -13.5 | 11 | Input | 0.0 |
| 2 | Negative supply (-13V) | -13.5 | 12 | Standby / mute control pin | 5.1 (0.4) |
| 3 | Negative supply (-13V) | -13.5 | 13 | Not connected | 0.0 |
| 4 | Output (Pulse width modulated) | 0.0 | 14 | Positive signal supply | 13.0 |
| 5 | Built-in Bootstrap diode anode | -2.6 | 15 | 10V internal regulator | -2.6 |
| 6 | Built-in Bootstrap capacitor | 10.0 | 16 | Positive power supply (+13V) | 13.0 |
| 7 | Not connected | 0.0 | 17 | Negative supply (-13V) | -13.5 |
| 8 | Feedback integrating capacitance | 0.0 | 18 | Negative supply (-13V) | -13.5 |
| 9 | Setting frequency resistor | -11.6 | 19 | Negative supply (-13V) | -13.5 |
| 10 | Signal ground | 0.0 | 20 | Negative supply (-13V) | -13.5 |

**IC402 (ST92195B)
MICRO CONTROLLER WITH OSD AND TELETEXT**

| Pin | Connection | V DC (*) | Pin | Connection | V DC (*) |
|-----|----------------------------------|----------|-----|--------------------------------------|-----------|
| 1 | Infra red input | 4.9 | 29 | Analog pin for TXT | 2.0 |
| 2 | Reset | 4.3 | 30 | Not connected | 1.0 |
| 3 | Not connected | 0.0 | 31 | Analog power supply for PLL (5V) | 4.9 |
| 4 | Not connected | 0.0 | 32 | Not connected | 4.8 |
| 5 | Not connected | 0.0 | 33 | CVBS input for TXT | 0.5 |
| 6 | Not connected | 0.0 | 34 | CVBS input for TXT | 1.7 |
| 7 | Not connected | 0.0 | 35 | Analog circuit ground | 0.0 |
| 8 | Local keyboard input | 4.9 | 36 | Digital circuit ground | 0.0 |
| 9 | Not connected | 0.0 | 37 | Analog pin for OSD | 0.0 |
| 10 | Not connected | 0.0 | 38 | Analog pin for OSD | 1.9 |
| 11 | Not connected | 0.0 | 39 | Analog power supply (5V) | 4.9 |
| 12 | Not connected | 0.0 | 40 | Horizontal sync for OSD | 0.7 |
| 13 | Used for factory mode | 4.9 | 41 | Vertical sync for OSD | 0.2 |
| 14 | Not connected | 0.0 | 42 | Not connected | 0.2 |
| 15 | Blue output for OSD and TXT | 0.7 | 43 | Not connected | 5.2 |
| 16 | Green output for OSD and TXT | 0.7 | 44 | Not connected | 0.0 |
| 17 | Red output for OSD and TXT | 0.7 | 45 | LL' select output | 4.8 |
| 18 | Fast Blanking for OSD and TXT | 0.0 | 46 | Not connected | 0.1 |
| 19 | SDA I2C Bus Data Input | see osc. | 47 | Vertical linearity output | 0.8 |
| 20 | SCL I2C Bus Clock Input | see osc. | 48 | Standby/Mute | 5.0 (0.2) |
| 21 | Supply Voltage (5V) | 4.9 | 49 | Standby/Mute | 5.0 (0.2) |
| 22 | Not connected | 0.9 | 50 | Oscillator out | 2.3 |
| 23 | Ground | 0.0 | 51 | Oscillator in | 2.4 |
| 24 | Ground | 0.0 | 52 | Not connected | 0.1 |
| 25 | Analog Vdd of PLL | - | 53 | On/Off (standby activate/deactivate) | 0.2 (2.8) |
| 26 | Testpins: must be tied to pin 25 | - | 54 | Not connected | 0.1 |
| 27 | Analog pin for OSD | 1.7 | 55 | Not connected | 0.0 |
| 28 | Not connected | 4.8 | 56 | Status signal input of Scart pin 8 | 0.0 |

IC501 (TDA8174) Vertical Deflection Output IC

| Pin | Connection | V DC | Pin | Connection | V DC |
|-----|-------------------|------|-----|-------------------|------|
| 1 | Power output | 13.4 | 7 | Ramp generator | 5.5 |
| 2 | Output stage Vs | 27.6 | 8 | Buffer output | 6.4 |
| 3 | Trigger input | 4.0 | 9 | Inverting input | 4.5 |
| 4 | Height adjustment | 6.8 | 10 | Vs | 27.6 |
| 5 | Not connected | 4.5 | 11 | Flyback generator | 1.3 |
| 6 | Ground | 0.0 | | | |

IC701 (TDA6107) RGB Output IC

| Pin | Connection | V DC | Pin | Connection | V DC |
|-----|----------------------|---------|-----|------------|---------|
| 1 | Red in | 2.3-2.5 | 6 | Vdd supply | 190.0 |
| 2 | Green in | 2.5-2.7 | 7 | Red out | 134-137 |
| 3 | Blue in | 2.5-2.7 | 8 | Green out | 128-130 |
| 4 | Gnd | 0.0 | 9 | Blue out | 130-137 |
| 5 | Black current output | 4.5-5.5 | | | |


| IC901 (TDA16847) Power Supply IC | | | | | |
|---|--|-----------------|------------|-------------------------------|-----------------|
| Pin | Connection | V DC (*) | Pin | Connection | V DC (*) |
| 1 | Off time circuit (for standby frequency) | 2.4 (0.4) | 8 | Power measurement output | 1.5 (2.4) |
| 2 | Primary Current Simulation and Startup | 1.9 (10.9) | 9 | Reference Ref. Voltage (5V) | 4.9 (1.1) |
| 3 | Regulation and Zero Crossing Input | 2.6 (0.3) | 10 | Fault Comparator 1 (not used) | 0.0 |
| 4 | Soft-Start and Regulation Capacitor | 3.7 (0.3) | 11 | Primary Voltage Check | 1.7 (2.5) |
| 5 | Opto Coupler Input (not connected) | 4.9 (0.8) | 12 | Ground | 0.0 |
| 6 | Fault Comparator 2 (not used) | 0.0 | 13 | Output | 4.0 (0.4) |
| 7 | Synchronization Input (for fixed freq.) | 4.9 (1.1) | 14 | Supply Voltage | 13.6 (11.7) |

(*) Standby measurement values are given in parenthesis

WAVEFORMS OF SOME IC PINS


Note: TV is connected to a pattern generator (Colour bar, sound 1 kHz).

IC101 (STV224X)

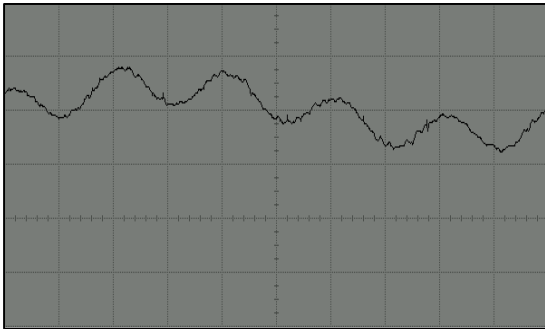


Pin 11

1V/div, 100 usn/div, Vpp=1.6 V

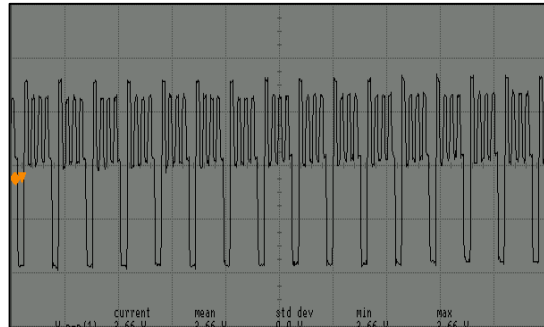


Pin 30

1V/div, 100 usn/div, Vpp=3.7 V, 15625 Hz

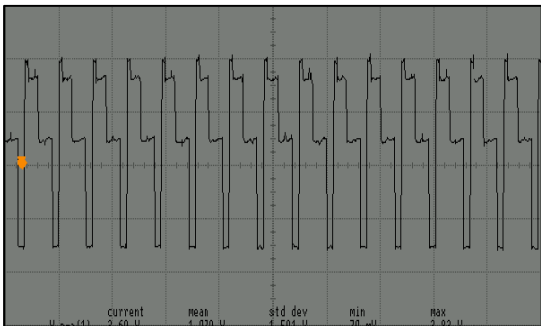


Pin 31

1V/div, 100 usn/div, Vpp=3.7 V, 15625 Hz

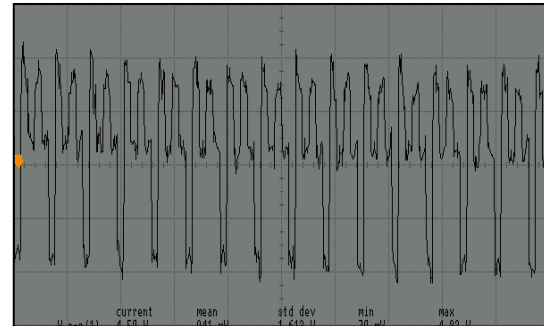


Pin 32

1V/div, 100 usn/div, Vpp=4.5 V, 15625 Hz

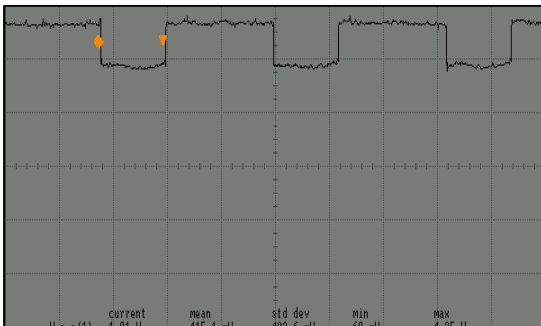


Pin 34 (OSD Off)

1V/div, 20 usn/div, Vpp=1 V, 15625 Hz

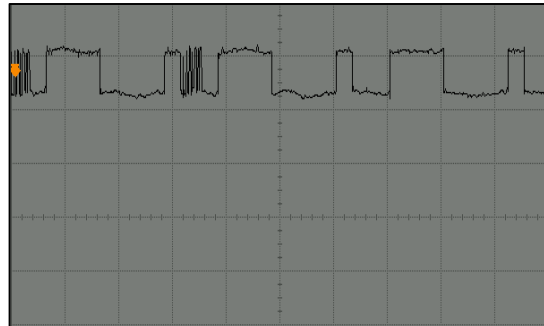


Pin 34 (OSD On)

1V/div, 20 usn/div, Vpp=1 V, 15625 Hz

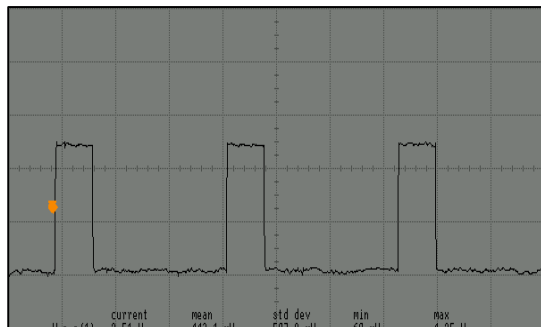

Pin 37 (OSD On)


1V/div, 20 usn/div, Vpp=2.51 V, 15625 Hz

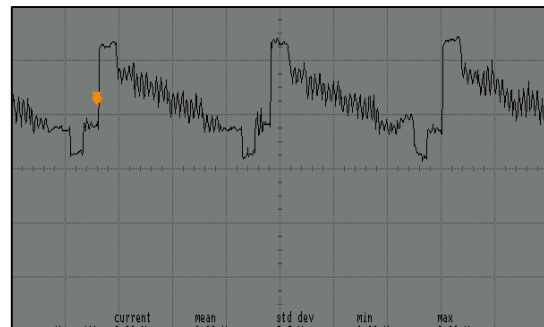

Pin 44


1V/div, 20 usn/div, Vpp=2.3 V, 15625 Hz

IC101 (STV224X)

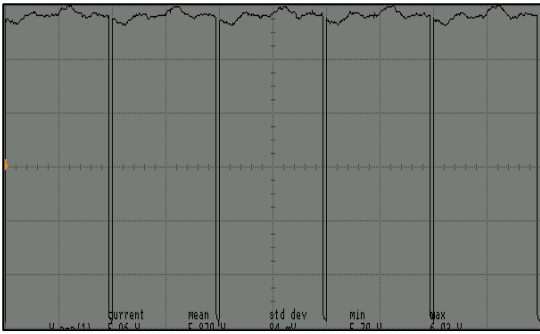


Pin 47

1V/div, 10 μs/div, Vpp=6.0 V, 50 Hz

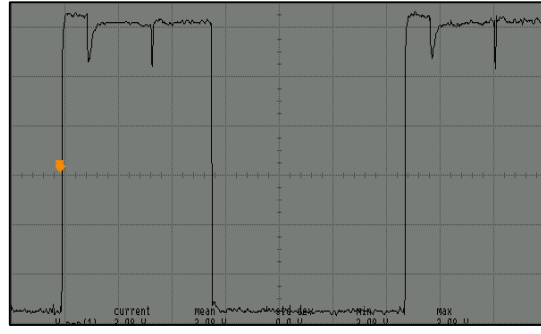

Pin 48


1V/div, 10 μs/div, Vpp=3.1 V, 15625 Hz

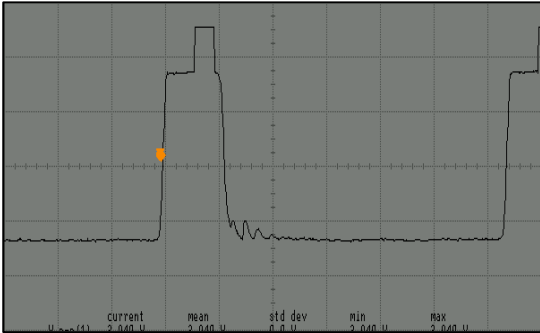

Pin 49


1V/div, 10 μs/div, Vpp=3.9 V, 15625 Hz

IC316 (MSP34X0G)

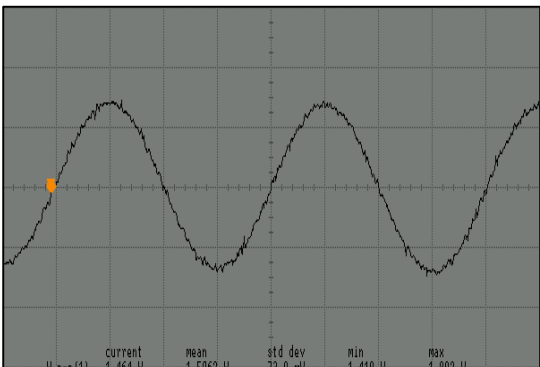

Pin 28


500mV/div, 50 μs/div, Vpp=1.5 V, 5kHz

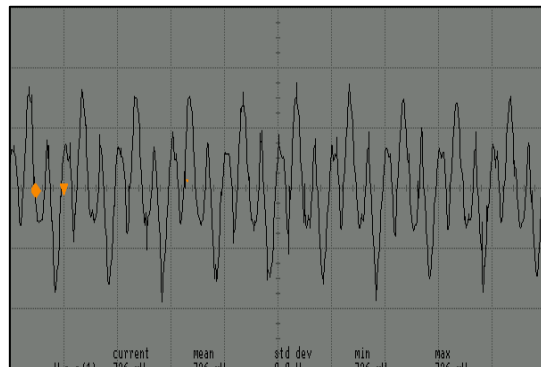

Pin 55


200mV/div, 20 μs/div, Vpp=0.7 V

IC317 (TDA7480)

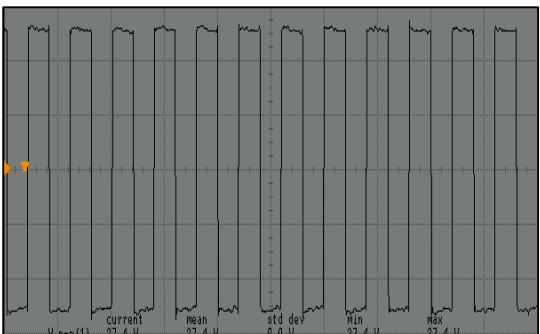

Pin 4


5 V/div, 10 μs/div, Vpp=27.4 V

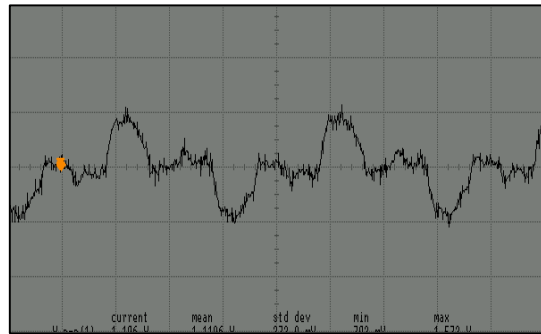

Pin 11


500mV/div, 5 μs/div, Vpp=1.1 V

IC402 (ST92195B)

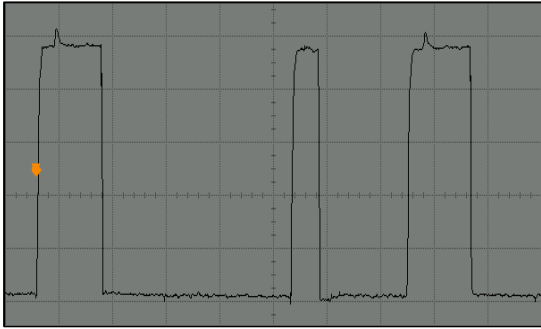


Pin 19

1V/div, 20 usn/div, Vpp=5.2 V

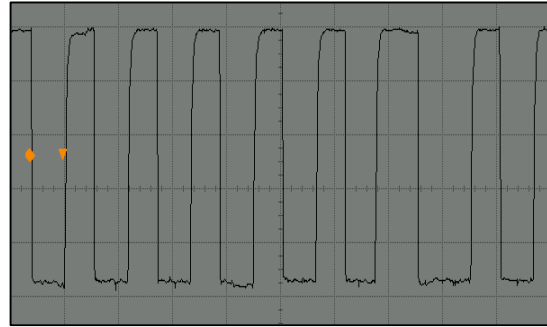


Pin 20

1V/div, 20 usn/div, Vpp=4.9 V, 15625 Hz

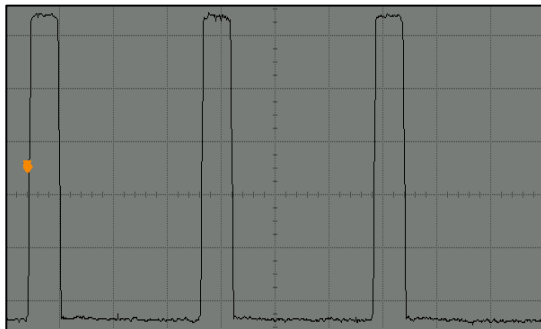


Pin 40

1V/div, 20 usn/div, Vpp=5.9 V, 15625 Hz

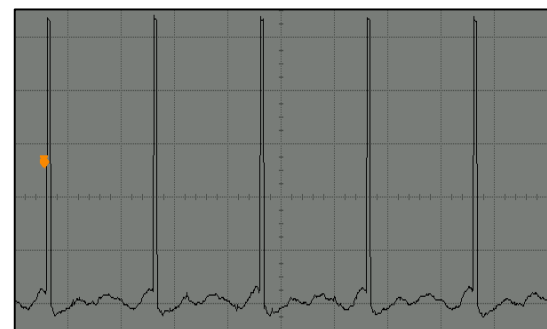

Pin 41


1V/div, 10 msn/div, Vpp=5.7 V, 50 Hz

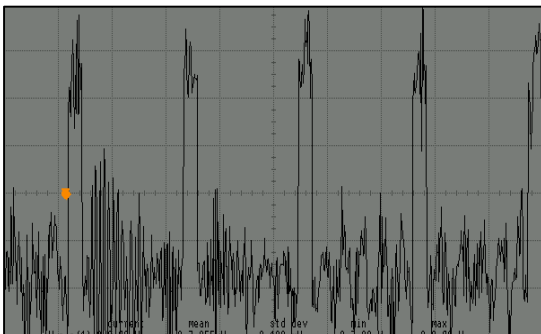

Pin 47


1V/div, 20 usn/div, Vpp=5.9 V, 15625 Hz

IC501 (TDA8174)

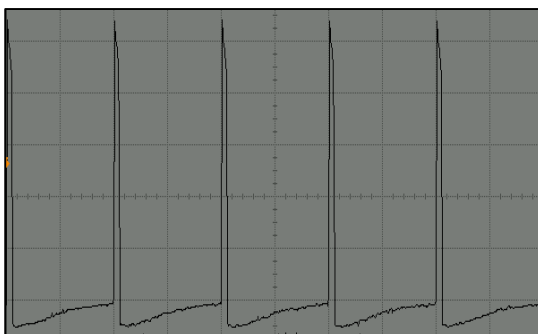

Pin 2


5V/div, 10 msn/div, Vpp=26.7 V, 50 Hz

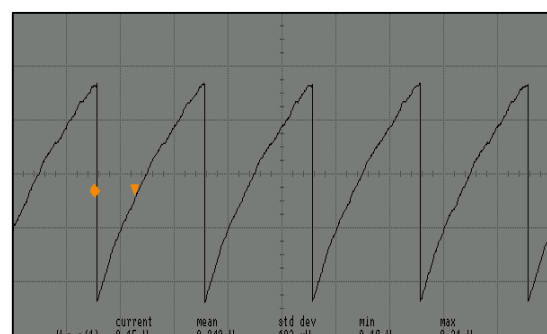

Pin 7


2V/div, 10 msn/div, Vpp=8.1 V, 50 Hz

IC701 TDA6107

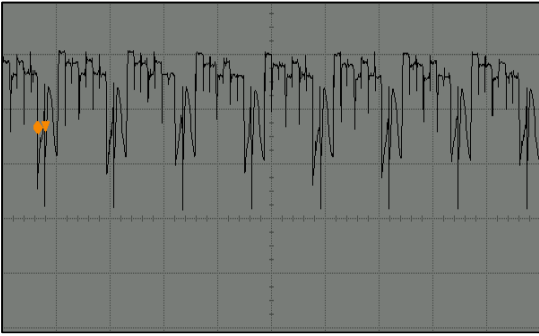


Pin 5

2V/div, 50 usn/div, Vpp=5.8 V, 15625 Hz

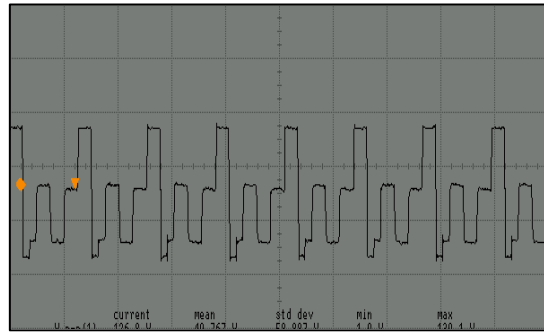


Pin 7

50V/div, 50 usn/div, Vpp=126.8 V, 15625 Hz

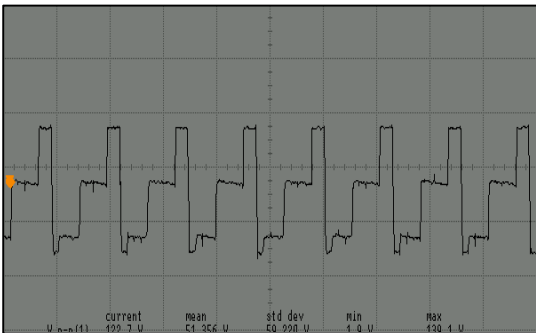

Pin 8


50V/div, 50 usn/div, Vpp=122.7 V, 15625 Hz

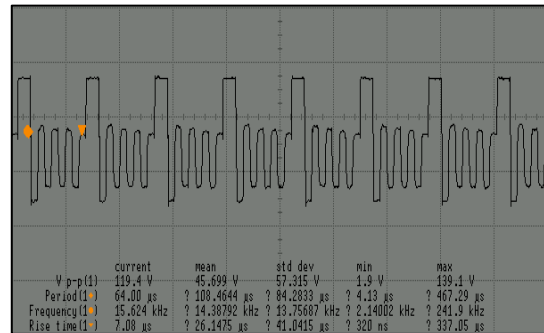

Pin 9


50V/div, 50 usn/div, Vpp=119.4 V, 15625 Hz

T551

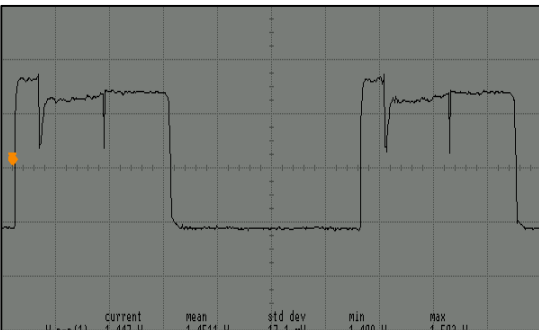

Base


500mV/div, 10 usn/div, Vpp=1.5V, 15625 Hz

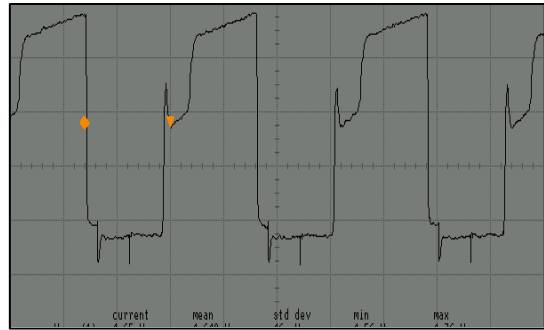

Collector


1 V/div, 20 usn/div, Vpp=4.7V, 15625 Hz

T552

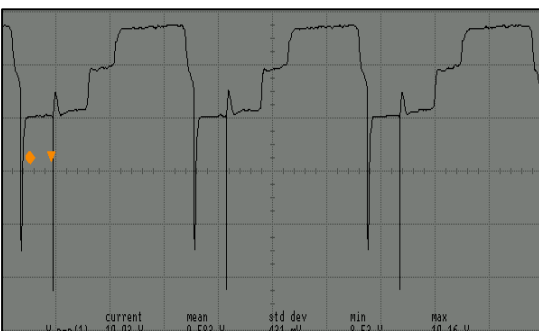

Base

2 V/div, 20 usn/div, Vpp=10V, 15625 Hz

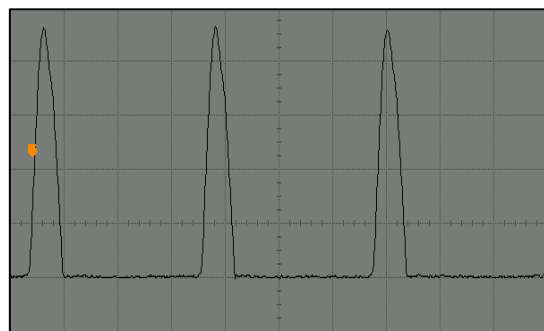

Collector

200 V/div, 20 usn/div, Vpp=932V, 15625 Hz

1. ELECTRICAL ADJUSTMENTS

1.1 Supply Voltage Adjustment

Connect a digital voltmeter to the cathode of diode D950 at the AV mode of the TV and set the screen voltage to the minimum with the screen potentiometer. Adjust the main supply voltage (B+) with P901 potentiometer to the following value (after supply adjustment, readjust Screen and focus voltage).

20" : 119 VDC (for A48ECR43X51)
21" : 114 VDC (for A51EER33X41)

2. SERVICE ADJUSTMENTS


You need the special service remote control to enter and exit the service menu of the TV (you can order it from the manufacturer). All buttons of the Service RC are same with the user remote control, only service menu In / Out is added to it (please see the picture below).

Navigation

Service In/Out : Enters to / exits from the Service Menu

P+ / P- : Moves upward / downward inside the menu

V+ / V- : Changes the values or options

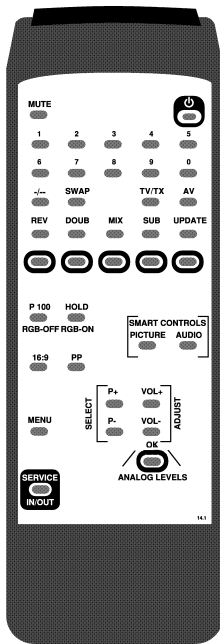

2.1 IF Adjustments

2.1.1 PAL SECAM BG/DK/I

- Apply a 38.9 MHz PAL colour bar RF signal to the pin 1 of SAW01 with a pattern generator. Switch on the Service Menu with the Service RC.
- Check that value of "VCO C" is "07". Adjust the coil LC100 until the colour of ":" sign turns red.
- Check that value of "VCO F" is "63". Adjust the coil LC100 until the colour of ":" sign turns red.
- Exit from the service menu with the Service RC.

2.1.2 SECAM L/L' (if available)

- Apply a 33.9 MHz SECAM L colour bar signal to the pin 1 of SAW01 with a pattern generator.
- Select the system as LL' in the TV setup menu. Switch on the Service Menu with the Service RC.
- Change the value of "VCO C L", until the colour of ":" sign turns red.
- Change the value of "VCO F L", until the colour of ":" sign turns red.
- Exit from the service menu with the Service RC.

2.2 AGC Adjustment

- Apply a signal with amplitude 65 ± 1 dBuV to the antenna input of TV with a pattern generator (switch sound carrier to Off and switch "Video Ext" to On).
- Switch on the Service Menu with the Service RC and find the "AGC1" with P+ / P- buttons.
- Measure the amplitude of 38.9 MHz sinusoidal signal on pin 11 (IF2) of Tuner with an oscilloscope.
- Adjust "AGC1" to get 540 ± 20 mVpp.
- Add 5 to "AGC1" value and change "AGC2" to this value.
- Exit from the service menu with the Service RC.

2.3 Screen Adjustment

- Switch on the Service Menu with the Service RC.
- Find item "SCRN" in the menu.
- Adjust the Screen potentiometre until the colour of ":" sign turns red.
- Exit from the service menu with the Service RC

2.4 White Balance Adjustment

- Apply a white pattern with a pattern generator to the antenna input.
- Enter the Service Menu with the Service RC and select "GRN" option with P+ / P- buttons and change its value to "0" with V+ / V- button.
- Adjust "RED" and "BLUE" for white balance. If white balance can not be adjusted properly change "GRN" value.
- Adjust "RED BIAS" and "GRN BIAS" for red and green cut off (There is no blue cut off adjustment).
- Exit from Service menu.

2.5 Geometry Adjustments

- Apply the cross hatch pattern with a pattern generator to the antenna input.
- Enter Service Menu with Service RC.
- Adjust Vertical Amplitude with "VAMP1 4/3 50Hz" option.
- Add 20 to "VAMP1 4/3 50Hz" value and change "VAMP2 16/9 50Hz" to this value.
- Subtract 18 from "VAMP1 4/3 50Hz" value and change "VAMP3 4/3 60Hz" to this value.
- Add 2 to "VAMP1 4/3 50Hz" value and change "VAMP4 16/9 60Hz" to this value.
- Adjust vertical position with "VSHT", vertical linearity with "VLIN", horizontal position with "HSHT" and vertical position of Teletext with "TXT VPOS".
- Exit from the Service Menu.

Note that: There is no horizontal width adjustment in this chassis. It can be adjusted by changing power supply voltage in the interval of -1 and +1 V.

2.6 Feature Options

| | |
|-----------|---|
| TUNER | : Panasonic1 (ENV57D44G3), Panasonic2 (ENV57D60G3), Phillips, Sharp, Temic |
| SSTD | : BG, I, BG+DK, BG + L |
| NICAM | : NICAM On (available), NICAM Off |
| VIR.DOLBY | : Yes (available), No |
| XTAL | : 1 (4,43), 2 (4,43-3,58) (NTSC Playback available) |
| APPL | : INTERCAR (Intercarrier), QSS |
| OSD CONTR | : On (OSD level control is On), Off |
| BLUE SCRN | : On (Blue background available), Off |
| APR | : On (Max. RGB level control is On), Off |
| COFF BLNK | : On (Auto cut off stabilization control is On), Off |
| AM SND | : MSP34XX, STV224X |
| HEAD | : Yes (Headphone available), No |
| FASTTEXT | : Yes (available), No |
| NUM.OF AV | : Please see Table 1 |
| AV2 | : Please see Table 1 |
| STD-BY | : ON (Default, Automatic switch off is active), OFF (can be used during repair) |

| | NUM.OF AV | AV2 |
|--------------------------------------|-----------|----------------|
| 1 Scart | 01 | NO |
| 1 Scart + Front AV | 02 | CINCH Front-AV |
| 1 Scart + Front AV + SVHS | 03 | CINCH Front-AV |
| 2 Scarts | 02 | SCART 2 |
| 2 Scarts (SVHS available on Scart 2) | 03 | SCART 2 |
| 2 Scarts + Front AV | 04 | SCART 2 |
| 2 Scarts + Front AV + SVHS | 05 | SCART 2 |

Table 1

2.7 Factory Settings for Service Mode

Values given in Table 2 are typical values and can vary according to the CRT type.

| | | 20" | 21" |
|-----------------|---------------------------------|------------|------------|
| AGC1 | Automatic Gain Control 1 | 32 | 32 |
| AGC2 | Automatic Gain Control 2 | AGC1 + 5 | AGC1 + 5 |
| STD BY | Standby | ON | ON |
| SCRN | Screen (used for screen adj.) | OFF | OFF |
| VCO C | VOC Coarse (BG/I/DK) | 07 | 07 |
| VCO F | VCO Fine (BG/I/DK) | 07 | 07 |
| VCO C L | VOC Coarse (LL') | 07 | 07 |
| VCO F L | VCO Fine (LL') | 07 | 07 |
| RED | Red level | 14 | 10 |
| GRN | Green level | 12 | 12 |
| BLUE | Blue level | 11 | 07 |
| RED BIAS | Black level offset red | 18 | 30 |
| GRN BIAS | Black level offset green | 23 | 28 |
| VAMP1 4/3 50HZ | Vertical amplitude 4/3 PAL/SEC | 33 | 32 |
| VAMP2 16/9 50HZ | Vertical amplitude 16/9 PAL/SEC | VAMP1 + 20 | VAMP1 + 20 |
| VAMP3 4/3 60HZ | Vertical amplitude 4/3 NTSC | VAMP1 - 18 | VAMP1 - 18 |
| VAMP4 16/9 60HZ | Vertical amplitude 16/9 NTSC | VAMP1 + 2 | VAMP1 + 2 |
| TXT VPOS | Teletext Vertical Position | 15 | 15 |
| VSHT | Vertical shift | 08 | 11 |
| VLIN | Vertical linearity | 31 | 31 |
| HSHT | Horizontal shift | 35 | 33 |

Table 2

2.8 Exit from Service Menu

During exit from service menu, the software version and feature options (hexadecimal number) are shown on the screen. For example: 12.3SX 14.11.01 SB5641-A02 44BA26.

SPARE PARTS LIST

| PART NO | DESCRIPTION | NOTES | POSITION NUMBERS |
|---------|-------------------------------|--------------|--------------------------|
| 250111 | EC 1UF 16V 11*5 R:5 | | C101 C125 C136 C138 C141 |
| 293108 | CC-CHIP 10NF K 50V /0805 X7 | | C102 C104 C140 |
| 251107 | EC 10UF M 16V 11*5 R:5 | | C105 C111 C134 C142 |
| 293230 | CC-CHIP 22NF K 50V /0805 X7 | | C108 C179 |
| 294331 | CC-CHIP 330NF K 16V /0805 X | | C109 |
| 291822 | CC-CHIP 820PF J 50V /0805 N | | C112 C131 |
| 251478 | EC 47UF 16V 11*5 R:5 | | C113 C145 |
| 294111 | CC-CHIP 100NF K 25V /0805 X | | C119 C120 C121 C122 |
| 252112 | EC 100UF 16V 11*6 R:5 | | C127 |
| 292476 | CC-CHIP 4.7NF K 50V /0805 X | | C128 C129 C188 |
| 250227 | EC 2.2UF 16V 11*5 R:5 | | C130 C173 C174 |
| 252229 | EC 220UF 16V 11*8 R:5 | | C135 |
| 250111 | C-ELA 1UF 16V 11*5 R:5 | LL' SYSTEM | C143 |
| 251107 | EC 10UF M 16V 11*5 R:5 | | C144 C170 C189 |
| 291225 | CC-CHIP 220PF K 50V /0805 X | | C148 C154 C156 |
| 291225 | CC-CHIP 220PF K 50V /0805 X | | C149 C162 C164 |
| 292110 | CC-CHIP 1NF K 50V /0805 X7R | | C150 C151 C152 C153 C169 |
| 291477 | CC-CHIP 470PF J 50V /0805 N | | C155 C157 C163 C165 |
| 292110 | CC-CHIP 1NF K 50V /0805 X7R | | C158 C159 C160 C161 |
| 293230 | CC-CHIP 22NF K 50V /0805 X7 | | C166 C171 C172 |
| 294111 | CC-CHIP 100NF K 25V /0805 X | | C167 C168 |
| 291103 | CC-CHIP 100PF J 50V /0805 N | | C175 C176 C177 |
| 291560 | CC-CHIP 560PF J 50V /0805 N | | C178 |
| 290274 | CC-CHIP 27PF J 50V NPO 0805 | | C180 |
| 290684 | CC-CHIP 68PF J 50V /0805 NPO | LL' SYSTEM | C184 |
| 294228 | CC-CHIP 220NF Z 50V /0805 Y5U | LL' SYSTEM | C185 C186 |
| 202105 | C-CE 1NF K 1KV Y5P R:5 | LL' SYSTEM | C187 |
| 293108 | CC-CHIP 10NF K 50V /0805 X7 | | C191 C192 C194 C195 |
| 290684 | CC-CHIP 68PF J 50V /0805 NP | | C200 |
| 252112 | EC 100UF 16V 11*6 R:5 | | C315 C338 C339 |
| 293474 | CC-CHIP 47NF K 50V /0805 X7 | | C316 |
| 274332 | C-PEM 330NF K 63V R:5 | | C340 C341 |
| 292223 | CC-CHIP 2.2NF K 50V /0805 X | | C342 C343 |
| 291223 | CC-CHIP 220PF J 50V /0805 N | | C346 |
| 294109 | CC-CHIP 100NF K 50V /0805 X | | C347 C348 C349 C350 C351 |
| 299152 | CC-CHIP 1.5PF C 25V/0805 | | C352 C353 |
| 293108 | CC-CHIP 10NF K 50V /0805 X7 | | C354 C355 C356 |
| 250470 | EC 4.7UF 16V 11*5 R:5 | | C358 C359 C360 C361 |
| 294331 | CC-CHIP 330NF K 16V /0805 X | CINCH | C362 C363 |
| 251478 | EC 47UF 16V 11*5 R:5 | | C370 C371 |
| 250227 | EC 2.2UF 16V 11*5 R:5 | | C373 C374 |
| 274104 | C-PEM 100NF K 63V R:5 | | C375 C377 C378 C380 C381 |
| 291271 | CC-CHIP 270PF J 50V /0805 N | | C383 C384 |
| 292476 | CC-CHIP 4.7NF K 50V /0805 X | | C388 |
| 291560 | CC-CHIP 560PF J 50V /0805 N | | C390 |
| 274471 | C-PEM 470NF K 63V R:5 | | C392 C393 |
| 291103 | CC-CHIP 100PF J 50V /0805 N | | C395 |
| 293474 | CC-CHIP 47NF K 50V /0805 X7 | | C401 C402 C404 C407 C420 |
| 203106 | CC 10NF K 50V R:5 | | C405 |
| 292476 | CC-CHIP 4.7NF K 50V /0805 X | | C408 C409 |
| 250227 | EC 2.2UF 16V 11*5 R:5 | | C410 |
| 290156 | CC-CHIP 15PF K 50V /0805 NP | | C412 C413 |
| 290821 | CC-CHIP 82PF J 50V /0805 N7 | | C414 |
| 292223 | CC-CHIP 2.2NF K 50V /0805 X | | C415 |
| 251107 | EC 10UF M 16V 11*5 R:5 | | C416 C418 C436 |
| 290222 | CC-CHIP 22PF J 50V /0805 NP | | C419 C424 C431 C432 |
| 294476 | CC-CHIP 470NF K 16V /0805 X | | C421 |
| 179001 | RC-CHIP 0R /0805 2*1.25 | BG/DK SYSTEM | C423 L108 R336 R337 R338 |
| 291560 | CC-CHIP 560PF J 50V /0805 N | | C429 C437 C438 |
| 252229 | EC 220UF 16V 11*8 R:5 | | C430 |

SPARE PARTS LIST

| PART NO | DESCRIPTION | NOTES | POSITION NUMBERS |
|---------|-----------------------------|------------|---------------------|
| 251478 | EC 47UF 16V 11*5 R:5 | | C433 C439 |
| 293108 | CC-CHIP 10NF K 50V /0805 X7 | | C435 |
| 274227 | C-PEM 220NF J 50V R:5 | | C501 |
| 253101 | EC 1000UF 35V 25*13 R:5 | | C503 |
| 252476 | EC 470UF 25V 11*10 R:5 | 21" | C504 |
| 250111 | EC 1UF 16V 11*5 R:5 | | C505 C511 C512 |
| 293152 | CC-CHIP 15NF K 50V /0805 X7 | | C508 |
| 273333 | C-PEM 33NF K 100V R:5 | | C508A |
| 291477 | CC-CHIP 470PF J 50V /0805 N | | C509 |
| 252105 | EC 100UF 50V 12*8 R:5 | | C510 |
| 250100 | EC 1UF 160V 11*6.3 R:5 | | C553 |
| 271390 | C-PPM 390NF J 250V R:15 | | C554 |
| 272820 | C-PPM 8.2NF %3.5 1.5/1.6KV | 21" | C555 |
| 272912 | C-PPM 9.1NF %3.5 1.5/1.6KV | 20" | C555 |
| 274330 | C-PEM 330NF J 250V R:15 | | C556 |
| 251109 | EC 10UF 250V 16*10 R:5 | | C560 |
| 202105 | CC 1NF K 1KV Y5P R:5 | | C561 |
| 274107 | C-PEM 100NF J 100V R:5 | | C563 |
| 252229 | EC 220UF 16V 11*8 R:5 | 21" | C564 |
| 252482 | EC 470UF 16V 12.5*10 R:5 | 20" | C564 |
| 271331 | C-PPM 330PF J 1500V/1600V R | | C565 |
| 251478 | EC 47UF 16V 11*5 R:5 | | C571 |
| 251109 | EC 10UF 250V 16*10 R:5 | | C702 C703 |
| 273225 | C-PEM 22NF J 63V R:5 | | C704 |
| 202221 | C-CE 2.2NF K 2KV Y5P R:7.5 | | C705 |
| 274224 | C-PEM 220NF K 275V-AC R22. | ⚠ | C901 |
| 274103 | C-PEM 100NF K 275V-AC R:15 | ⚠ | C902 |
| 202105 | CC 1NF K 1KV Y5P R:5 | | C903 C904 C917 C918 |
| 203330 | C-PPM 33NF J 630V R:15 | | C906 |
| 201471 | CC 470PF 2KV | | C907 |
| 293108 | CC-CHIP 10NF K 50V /0805 X7 | | C909 |
| 293474 | CC-CHIP 47NF K 50V /0805 X7 | | C910 C955 C958 C967 |
| 291123 | CC-CHIP 120PF K 50V /0805 X | | C911 |
| 292223 | CC-CHIP 2.2NF K 50V /0805 X | | C913 C914 |
| 274105 | C-PEM 100NF J 250V R:10 | ⚠ | C915 C701 |
| 274332 | C-PEM 330NF K 63V R:5 | | C919 |
| 202220 | CC 2.2NF M 250VAC Y5U R:10 | ⚠ | C920 |
| 202106 | CC 1NF K 50V Y5P R:5 | CINCH | C920 C921 |
| 202102 | C-CEA 1NF K 50V R:10 | CINCH | C922 C923 |
| 290561 | CC-CHIP 56PF J 50V NPO 0805 | CINCH | C923 |
| 273471 | C-PEM 47NF K 63V R:5 | HEADPHONE | C940 C941 |
| 201226 | CC 220PF K 2KV Y5P R:5 | | C950 |
| 250470 | EC 4.7UF 16V 11*5 R:5 | | C956 |
| 251225 | EC 22UF 16V 11*5 R:5 | | C965 |
| 291101 | CC-CHIP 100PF J 50V /1206 N | | C981 C982 |
| | | | |
| 302296 | DIODE 1N4148 26MM | | D103 |
| 302289 | DIODE 1N4148 52MM | | D103 |
| 303195 | DIODE 4148 MELF | | D107 |
| 303223 | DIODE-CHIP BA682 SOD80 | LL' SYSTEM | D180 D181 |
| 303988 | LED LTL 4224 RED (SHORT LEG | 21" | D418 |
| 303850 | LED LTL 4263 RED L=25.4 | 20" | D418 |
| 303308 | DIODE RF2007 | | D502 |
| 302296 | DIODE 1N4148 26MM | | D503 D559 |
| 300305 | DIODE BA157 | | D552 D556 |
| 303217 | DIODE RGP10J | | D553 D560 |
| 303195 | DIODE 4148 MELF | | D557 |
| 302289 | DIODE 1N4148 52MM | | D558 |
| 302948 | DIODE 1N4007 | | D701 |
| 303209 | DIODE BAV21 | | D702 D703 D704 |

SPARE PARTS LIST

| PART NO | DESCRIPTION | NOTES | POSITION NUMBERS |
|-----------|--------------------------------------|------------------------|--------------------------|
| 303206-01 | DIODE RGP30M | | D901 D902 D903 D904 |
| 303217 | DIODE RGP10J | | D905 D950 |
| 302289 | DIODE 1N4148 52MM | | D906 D907 D908 D909 |
| 303813 | DIODE RGP15D | | D951 D952 |
| 303993 | LED LTL4221N D:3 R/D RED | | D980 |
| 303991 | LED IR SIR563SB3F 23/940 | | D981 |
| | | | |
| 056721 | SER.FILTER TPS5.5MWA | BG SYSTEM | F101 |
| 056762 | SER.FILTER TPT02B | BG/DK SYSTEM | F101 |
| 056745 | SER.FILTRE TPS6.0MB | I SYSTEM | F101 |
| 056731 | SER.FILTRE TPSRD5M50W00-A0 | LL' SYSTEM | F101 |
| 056640-01 | SER.FILTRE MKT40.4MA110P-TF01 MURATA | LL' SYSTEM | F102 |
| 056640-01 | SER.FILTER MKT40.4MA110P-TF | | F401 |
| 056641 | SER.FILTRE MKT40.9MA110P MURATA | I SYSTEM | F401 |
| | | | |
| 452842 | IC STV2246-5X | PAL BG, I SYSTEMS | IC101 |
| 452836-01 | IC STV2248C | PAL + SECAM LL' SYSTEM | IC101 |
| 452990 | IC STV2249C | PAL/SEC BG/DK SYSTEM | IC101 |
| 452985 | IC-CHIP MC14053BD SOIC16 | TWO SCARTS | IC102 |
| 452374 | IC L78L05 ACZ TR | | IC315 IC953 |
| 452575-01 | IC MSP3400G | NON NICAM | IC316 |
| 452800 | IC MSP3410G PSDIP64 AUDIO P | NICAM | IC316 |
| 452989 | IC TDA7480L | | IC317 IC318 |
| 452844 | IC-CHIP ST24C08 (EEPROM) 5V | | IC401 |
| 458641 | IC ST92T195B7 (64K TX) OTP | | IC402 |
| 452648 | IC TDA8174AW | | IC501 |
| 452746 | IC TDA6107Q | | IC701 |
| 452986 | IC TDA16847 | | IC901 |
| 50S310 | INSULATER BUZ90 17*12*.15 | | IC901 |
| 451518 | IC KA317TU T0220CASE | | IC951 |
| 452382 | IC-CHIP S3C1840DA9/SMB1 | | IC980 |
| | | | |
| 053711 | COIL 10UH K (TAIYO) LAL03 | | L101 L102 L315 L316 |
| 053805 | COIL-CHIP 1UH K /0805 | | L103 L106 |
| 053740 | COIL 1UH K LAL03 | | L104 |
| 053750 | COIL 5.6UH K | DK SYSTEM | L105 |
| 053806 | COIL-CHIP 8.2UH K /0805 | BG SYSTEM | L107 |
| 179001 | RC-CHIP 0R /0805 2*1.25 | LL' SYSTEM | L107 |
| 053781 | COIL 2.2UH LAL04 | | L317 L318 L319 L320 L321 |
| 053353 | COIL- CHOKE 68UH /1A RADIAL | | L323 L324 |
| 053749 | COIL 18UH K /3.4 26MM | | L401 L402 |
| 053798 | COIL-CHIP 18UH K /0805 | | L403 L404 |
| 053715 | COIL 6.8UH K R12.5 | ⚠ | L502 |
| 051585 | COIL H-LIN 70UH | | L551 |
| 053352 | COIL- CHOKE 10UH R0814 14.1 | | L701 |
| 051815 | LINE FILTER 2 X 18 MH MIN.TYPE | ⚠ | L901 |
| 053739 | COIL CHOKE 50UH | | L950 |
| 053506-01 | COIL DEMOD 38.9 HEX | | LC100 |
| 055597 | FERRITE BEAD 12*8 | | |
| | | | |
| 132500 | R-VAR 5K (V) 5*3 | | P901 |
| 031780 | CONN.HOUSING 2'LI GREY | | PL501 |
| 031777 | CON.HOUSING LOCKED 5/4 | | PL551 |
| 056023 | CRYSTAL 4.433619MHZ | | Q101 |
| 056660 | CRYSTAL 3.579545 90OHM | | Q102 |
| 056952 | CRYSTAL 18.432MHZ +-30PPM | | Q315 |
| 056013 | CRYSTAL 4 MHZ | | Q401 |
| 056210 | CER.RESONATOR GSB455E | | Q980 |
| | | | |
| 173273 | CFR-CHIP 27K J 1/10W /0805 | | R101 R427 |

SPARE PARTS LIST

| PART NO | DESCRIPTION | NOTES | POSITION NUMBERS |
|---------|-----------------------------|------------|-------------------------------|
| 171150 | RC-CHIP 150R J 1/10W /0805 | | R102 R124 R333 R334 |
| 171221 | RC-CHIP 220R J 1/10W /0805 | | R104 R129 R441 R442 |
| 172101 | RC-CHIP 1K J 1/10W /0805 | | R105 R112 R117 R120 R144 |
| 170472 | RC-CHIP 47R J 1/10W /0805 | | R107 R106 R108 R113 |
| 101470 | CFR 470R J 1/4W /6 52MM | | R109 R110 R111 |
| 171471 | RC-CHIP 470R J 1/10W /0805 | | R116 |
| 171102 | RC-CHIP 100R J 1/10W /0805 | | R118 R119 R160 |
| 102141 | CFR 1K J 1/4W /6 26MM | | R121 |
| 172823 | RC-CHIP 8.2K J 1/10W /0805 | | R122 |
| 172561 | RC-CHIP 5.6K J 1/10W /0805 | | R123 R415 R416 |
| 171182 | RC-CHIP 180R J 1/10W /0805 | | R125 R126 |
| 172101 | RC-CHIP 1K J 1/10W /0805 | | R127 R172 R173 |
| 173101 | RC-CHIP 10K J 1/10W /0805 | | R128 |
| 173562 | RC-CHIP 56K J 1/10W /0805 | | R130 |
| 174331 | RC-CHIP 330K J 1/10W /0805 | | R131 R188 |
| 172225 | RC-CHIP 2.2K J 1/10W /0805 | | R132 |
| 171270 | RC-CHIP 270R J 1/10W /0805 | | R135 R136 R137 |
| 173479 | RC-CHIP 47K J 1/10W /0805 | | R138 |
| 172335 | RC-CHIP 3.3K J 1/10W /0805 | | R139 |
| 171221 | RC-CHIP 220R J 1/10W /0805 | LL' SYSTEM | R142 |
| 170750 | RC-CHIP 75R J 1/10W /0805 | | R152 R154 R163 R164 R166 |
| 170683 | RC-CHIP 68R J 1/10W /0805 | | R157 |
| 170750 | RC-CHIP 75R J 1/10W /0805 | | R158 R174 |
| 171332 | RC-CHIP 330R J 1/10W /0805 | | R159 R161 R168 R208 |
| 171102 | RC-CHIP 100R J 1/10W /0805 | | R160 R162 R182 R183 R184 R189 |
| 172101 | RC-CHIP 1K J 1/10W /0805 | | R165 R167 |
| 171102 | RC-CHIP 100R J 1/10W /0805 | | R169 R171 R121 |
| 172475 | RC-CHIP 4.7K J 1/10W /0805 | | R175 R176 |
| 173479 | RC-CHIP 47K J 1/10W /0805 | | R177 R178 R179 R180 |
| 101117 | RC 100R J 1/4W 26MM | LL' SYSTEM | R185 |
| 173101 | RC-CHIP 10K J 1/10W /0805 | LL' SYSTEM | R186 R191 |
| 102338 | RC 3.3K J 1/4W /6 52MM | LL' SYSTEM | R190 R192 |
| 172225 | RC-CHIP 2.2K J 1/10W /0805 | LL' SYSTEM | R193 |
| 101106 | RC 100R J 1/4W 52MM | LL' SYSTEM | R194 |
| 179002 | RC-CHIP 0R /1206 | LL' SYSTEM | R195 |
| 179001 | RC-CHIP 0R /0805 2*1.25 | | R203 R209 L109 R181 |
| 171332 | RC-CHIP 330R J 1/10W /0805 | HEADPHONE | R315 R316 |
| 172335 | RC-CHIP 3.3K J 1/10W /0805 | | R317 R318 R320 |
| 171102 | RC-CHIP 100R J 1/10W /0805 | | R321 R322 |
| 171471 | RC-CHIP 470R J 1/10W /0805 | CINCH | R328 R345 |
| 173123 | RC-CHIP 12K J 1/10W /0805 | | R329 R330 |
| 291103 | CC-CHIP 100PF J 50V /0805 N | | R335 |
| 173154 | RC-CHIP 15K J 1/10W /0805 | | R343 R412 |
| 172475 | RC-CHIP 4.7K J 1/10W /0805 | | R344 R432 R422 |
| 170047 | RC-CHIP 4.7R J 1/10W /0805 | | R346 |
| 173101 | RC-CHIP 10K J 1/10W /0805 | | R401 R404 R426 R428 |
| 172475 | RC-CHIP 4.7K J 1/10W /0805 | | R402 R406 R407 R408 R434 R440 |
| 172225 | RC-CHIP 2.2K J 1/10W /0805 | | R403 |
| 172273 | RC-CHIP 2.7K J 1/10W /0805 | | R405 R511 |
| 172101 | RC-CHIP 1K J 1/10W /0805 | | R409 R520 |
| 171471 | RC-CHIP 470R J 1/10W /0805 | | R410 R411 |
| 171332 | RC-CHIP 330R J 1/10W /0805 | | R417 |
| 171685 | RC-CHIP 680R J 1/10W /0805 | | R425 R564 |
| 172823 | RC-CHIP 8.2K J 1/10W /0805 | | R435 R438 |
| 173393 | RC-CHIP 39K J 1/10W /0805 | | R437 R904 |
| 129236 | RW 2.2R J 0.75W 73MM | | R501 |
| 101471 | CFR 470R J 1/2W /9 52MM | | R502 R557 |
| 100220 | CFR 22R J 1/2W 52MM | | R503 |
| 174151 | RC-CHIP 150K J 1/10W /0805 | | R505 R506 |
| 172183 | RC-CHIP 1.8K J 1/10W /0805 | | R508 R512 |

SPARE PARTS LIST

| PART NO | DESCRIPTION | NOTES | POSITION NUMBERS |
|------------|--------------------------------|--------------|---------------------|
| 119125 | RM 1.2R J 1/2W 52MM | 21" | R509 |
| 119153 | RM 1.5R J 1/2W 52MM | 20" | R509 |
| 170472 | RC-CHIP 47R J 1/10W /0805 | 21" | R510 |
| 173101 | RC-CHIP 10K J 1/10W /0805 | | R513 R423 |
| 102141 | CFR 1K J 1/4W /6 26MM | | R519 |
| 174104 | RC-CHIP 100K J 1/10W /0805 | | R521 |
| 172823 | RC-CHIP 8.2K J 1/10W /0805 | | R522 |
| 172225 | RC-CHIP 2.2K J 1/10W /0805 | | R523 |
| 172394 | RC-CHIP 3.9K J 1/10W /0805 | | R524 |
| 103224 | CFR 22K J 1/4W 52MM | | R526 |
| 110823 | RMO 82R J 3W R:20 | | R554 |
| 100473 | CFR 47R J 1/4W /6 52MM | | R555 R921 |
| 113114 | RM 10K J 1/2W 52MM | | R558 |
| 119337 | RMO 3.3R J 2W R:27.5 TAPE | ⚠ | R559 |
| 119478 | RMF 0.47R J 1W | ⚠ 20" | R560 |
| 119109 | RNF 0.1R J 0.4W (UFLB) 52MM | ⚠ 21" | R560 |
| 103136 | CFR 10K J 1/4W /6 26MM | | R562 |
| 172683 | RC-CHIP 6.8K J 1/10W /0805 | 21" | R563 |
| 172823 | RC-CHIP 8.2K J 1/10W /0805 | 20" | R563 |
| 101681 | CFR 680R J 1/2W /9 52MM | | R568 |
| 103475 | CFR 47K J 1/4W /6 52MM | | R705 |
| 102159 | CFR 1.5K J 1/2W /9 52MM | | R711 R713 R715 R716 |
| 101683 | CFR 680R J 1/4W /6 52MM | | R901 |
| 154216 | NTC 5.1R M (S234R) | | R901 |
| 102166 | CFR 1.5K J 1/4W /6 26MM | | R902 R903 |
| 113683 | RMO 68K J 1.5W 73MM | | R903 |
| 173101 | RC-CHIP 10K J 1/10W /0805 | | R905 |
| 114825 | RM 820K %1 1/4W 52MM | | R907 R908 |
| 172335 | RC-CIHP 3.3K J 1/10W /0805 | | R909 |
| 114560 | RM 560K %1 1/4W 52MM | | R911 R922 |
| 174223 | RC-CHIP 220K J 1/10W /0805 | | R912 |
| 115225 | RMO 2.2M J 1/2W | | R913 |
| 171822 | CFR-CHIP 820R J 1/10W /0805 | | R914 |
| 173221 | RC-CHIP 22K J 1/10W /0805 | | R915 |
| 172683 | RC-CHIP 6.8K J 1/10W /0805 | | R917 |
| 173333 | RC-CHIP 33K J 1/10W /0805 | | R918 |
| 115470 | RM 4.7M J 1/2W 52MM | ⚠ | R920 |
| 113393 | RM 39K J .5W 52MM | ⚠ | R950 |
| 171240 | RC-CHIP 240R %1 1/10W /0805 | | R953 |
| 112131 | RM 1.3K %1 1/4W 26MM | | R954 |
| 109560 | CFR 5.6R J 1/4W /3.2 52MM | | R956 |
| 101106 | CFR 100R J 1/4W 52MM | | R957 |
| 129109 | RWF 0.1R J 0.75W 73MM | ⚠ | R959 |
| 119109 | RNF 0.1R J 0.4W (UFLB) 52MM | ⚠ | R960 |
| 179002 | RC-CHIP 0R /1206 | | R981 |
| | | | |
| 452521 | IR RECEIVER TSOP 1838 | ⚠ | S401 |
| 054261 | FUSE 2.5AT (215 SER.) | ⚠ | S901 |
| 056749 | SAW FILTER OFW G1985M | BG SYSTEM | SAW1 |
| 056070 | SAW FILTER OFW K2966M | BG/DK SYSTEM | SAW1 |
| 056114 | SAW FILTRE OFW J1980M I SISTEM | I SYSTEM | SAW1 |
| 056709 | SAW FILTRE OFW K3953M | LL' SYSTEM | SAW1 |
| 056767 | SAW FILTRE OFW K9456M | LL' SYSTEM | SAW2 |
| 031251 | SCART SOCKET 14.1 | | SK101 |
| 031197 | SCART SOKET HR-DM2441S-O | | SK102 |
| | | | |
| 7KY136-PS1 | TUNER ENV57D60G3 ASIMETRIK | | T100 |
| 401141 | TRN-CHIP BC848B SOT23 | | T101 T102 T103 |
| 401141 | TRN-CHIP BC848B SOT23 | LL' SYSTEM | T105 T108 |
| 400989 | TRN BC558B | HEADPHONE | T315 T316 |

SPARE PARTS LIST

| PART NO | DESCRIPTION | NOTES | POSITION NUMBERS |
|------------|-----------------------------|---------------------------|---------------------|
| 401142 | TRN-CHIP BC858B SOT23 | | T317 T318 T319 T320 |
| 401141 | TRN-CHIP BC848B SOT23 | | T321 T322 |
| 401142 | TRN-CHIP BC858B SOT23 | | T401 |
| 401141 | TRN-CHIP BC848B SOT23 | | T406 T501 T502 T402 |
| 401334 | TRN STX112 | | T551 |
| 401332 | TRN BU808DFI | | T552 |
| 401216-02 | TRN 2SK2545 | | T901 |
| 400901 | TRN BC327-25 | | T902 |
| 401141 | TRN-CHIP BC848B SOT23 | | T906 |
| 401047 | TRN BC337-25 | | T950 |
| 401142 | TRN-CHIP BC858B SOT23 | | T980 |
| 058013-TR1 | FBT 20/21" 12.1 | ⚠ | TR552 |
| 059315 | SMT 90" 12.3 STEREO | ⚠ | TR901 |
| | | | |
| 031882 | CONN.HOUSING X2010 GREY | SINGLE SCART | X102 |
| 031751 | CONN.HOUSING 2212 GREY | TWO SCARTS | X102 |
| 031730 | CONN.HOUSING 2012 GREY | | X103 |
| 031856 | CONN.HOUSING X2003 BLACK | | X104 |
| 031422 | CONN.FEMALE 12P GREY | | X315 |
| 031854 | CONN.HOUSING X2003 GREY | | X316 |
| 031323 | CON.MKF19400-6-0-1010 | SINGLE SCART | X317 |
| 031422 | CONN.FEMALE 12P GREY | TWO SCARTS | X317 |
| 031857 | CONN.HOUSING X2003 RED | | X318 |
| 031860 | CONN.HOUSING X2004 BLACK | | X319 |
| 031858 | CONN.HOUSING X2004 GREY | | X320 |
| 031864 | CONN.HOUSING X2005 BLACK | | X401 |
| 031530-01 | INCHANG/CRT SOCKET ISHM05S- | | X703 |
| 031675 | CON.HOUSING 2P MALE | | X901 X902 |
| 031162 | CONN. CINCH RCA PJ803-4 YEL | | X921 |
| 031161 | CONN. CINCH RCA PJ803-3 RED | | X922 |
| 031160 | CONN. CINCH RCA PJ803-2 WHI | | X923 |
| 031180 | CONN.HEADPHONE 12.1 FRONT-A | | X941 |
| | | | |
| 302297 | DIODE Z. 3.9V 26MM | | ZD406 |
| 303771 | DIODE Z. UZT33V | | ZD570 |
| 303110 | DIODE Z. 3.3V | | ZD901 |
| 303735 | MTZJ5.6B | | ZD952 |
| | | | |
| 7HA110 | B5 CHASSIS 20" | 20" PAL BG NICAM HP CINCH | |
| M17110 | B5 CHASSIS 21" | 21" PAL BG ST | |
| M38110 | B5 CHASSIS 21 | 21" PAL/SEC BG/DK NICAM | |
| 056520-SB1 | CPT SEB A48ECR43X51 | | |
| 056521-SB1 | CPT SEB A51EER33X41 | | |
| 620167-AS | DEGAUSSING COIL ASSY 20" BA | ⚠ | |
| 621167-AS | DEGAUSSING COIL ASSY 21" BA | ⚠ | |
| 7TV187 | RC A TYPE FUME 14.1 | | |
| 6VM187 | RC A TYPE SILVER 14.1 | | |
| 7TK187 | RC B TYPE FUME 14.1 | | |
| 528107-AS | SPK.FOST.8R/7W PRJ-C POWER- | | |
| 7ZY107-AS | SPK.FT 8R/7W(NOM)(120X50MM) | | |

Please note that Product Part List Files should be investigated for the mechanical parts like cabinets, etc.



**ROADSTAR MANAGEMENT SA.
(INTERNATIONAL SERVICE DIVISION)**

Via Passeggiata, 1 - BALERNA - SWITZERLAND
Tel. +4191-6975155 - Fax. +4191-6975151
e-mail: aftersal@roadstar.com

**ROADSTAR ITALIA S.P.A.
SERVICE DIVISION (DOMESTIC ITALY)**

Viale Matteotti, 22 - CERNOBBIO (CO) - ITALY
Tel. +39031-342340 - Fax. +39031-3346291