


# CAMERA POWER CONVERTER

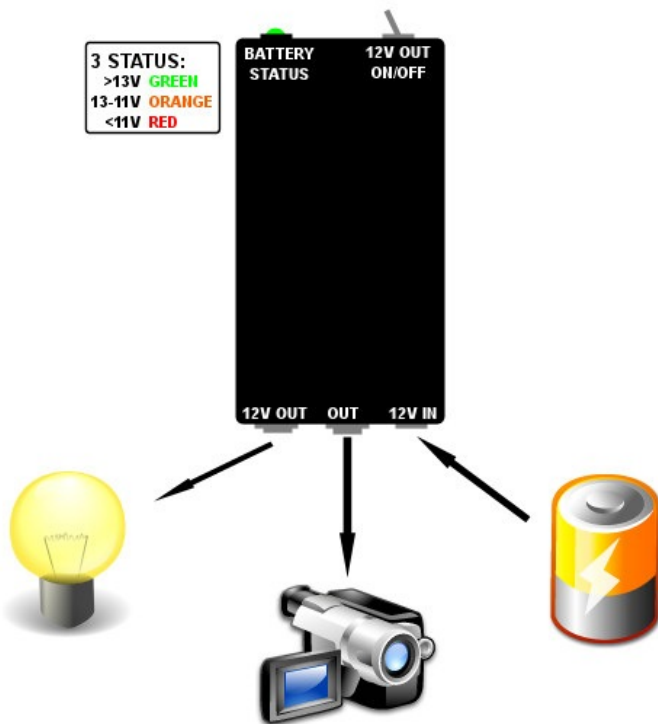

Converts 12V to the adjusted level (via the adjustment screw).

## Features:

- Two output
- Precise voltage control
- Fuse protection
- Short-circuit protection
- Heat protection
- Battery status LED
- Belt clip

Minimum output voltage: 1.2V

Maximum output voltage: 10.7V

Maximum output power: 1500 mA

Additional – switchable - output: identical to the input voltage (eg. for headlamps)

The three-color battery status LED informs you from the status of the input voltage (battery voltage). Between 15.4V and 12.6V the LED is green. Between 12.5V and 11.6V the LED is orange. Below 11.5V the LED is red.

## Specifications:

- Input:
  - 12V – 3.5mm STEREO Jack
- Adjustable output:
  - 1.2V – 10.7V 1500mA – 5.5x2.5mm DC
- Switchable output:
  - identical to the input voltage – 5.5x2.5mm DC
- Battery status LED
  - above 15.6V - blank
  - 15.4V - 12.6V – green
  - 12.5V – 11.6V – orange
  - below 11.5V - red
- Fuse size: 5x20mm

