

## Box Properties

--Description--

Name:

Type: Vented Box

Shape: Prism, square (optimum)

--Box Parameters--

Vb = 55, liters

V(total) = 57,18 liters

Fb = 55, Hz

F3 = 44,13 Hz

Fill = normal

--Vents--

No. of Vents = 1

Vent shape = round


Vent ends = one flush

Dv = 110, mm

Lv = 61,88 mm

Normalized Amplitude Response (dB-SPL/Hz)

BassBox 6 Pro

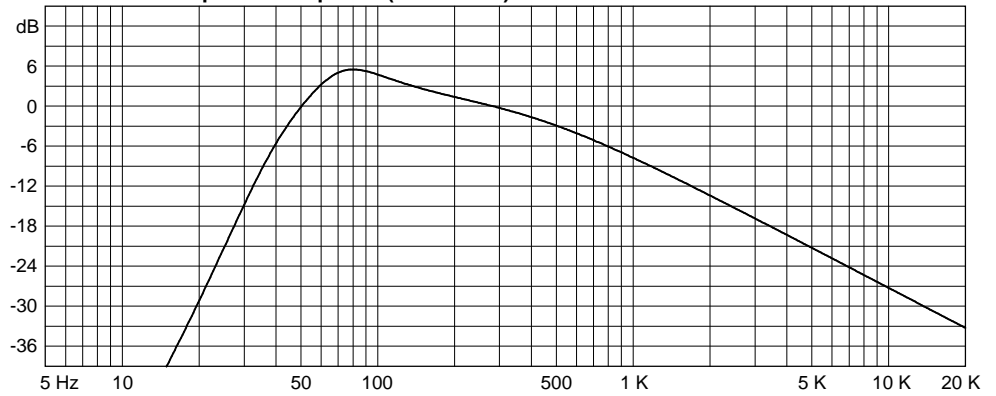

## Driver Properties

--Description--

Name: 2075H

Type: Standard one-way driver

--Configuration--

No. of Drivers = 1

--Mechanical Parameters--

Fs = 46,89 Hz

Qms = 7,16

Vas = 44,2 liters

Cms = 0,48 mm/N

Mms = 24, g

Rms = 0,988 kg/s

Xmax = 6, mm

Xmech = 9, mm

P-Dia = 18,01 cm

Sd = 254,6 sq.cm

P-Vd = 0,153 liters

--Electrical Parameters--

Qes = 0,78

Re = 6,8 ohms

Le = 2,49 mH

Z = 8,16 ohms

BL = 7,851 Tm

Pe = 100, watts

--Electromech. Parameters--

Qts = 0,703


no = 0,563 %

1-W SPL = 89,65 dB

2.83-V SPL = 90,36 dB


Custom Amplitude Response (dB-SPL/Hz at 1 m) with 100, watts

BassBox 6 Pro

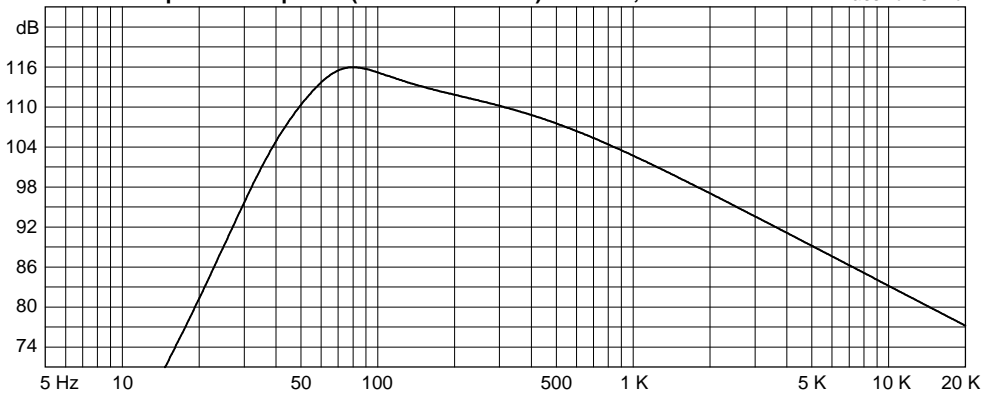

Maximum Acoustic Power (dB-SPL/Hz at 1 m)

BassBox 6 Pro

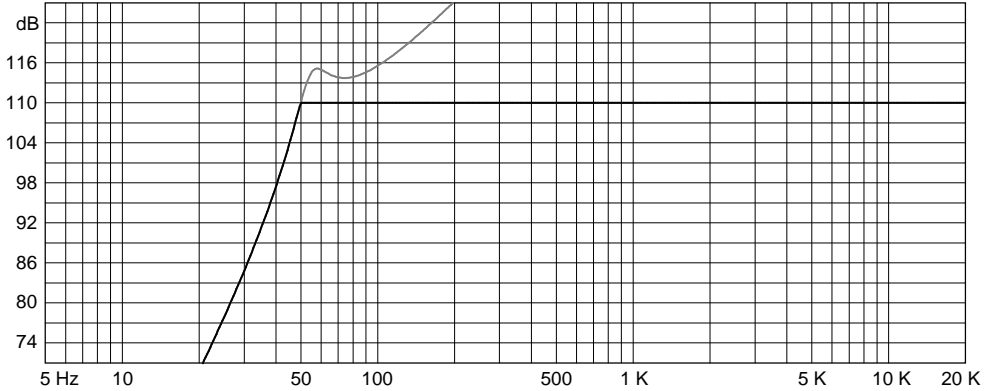

Maximum Electric Input Power (W/Hz)

BassBox 6 Pro

