Recipient #106454 printed on 1/25/2006. This is a ONE-TIME copy. Updates will not be provided.

REFERENCE APPLICATION CIRCUIT

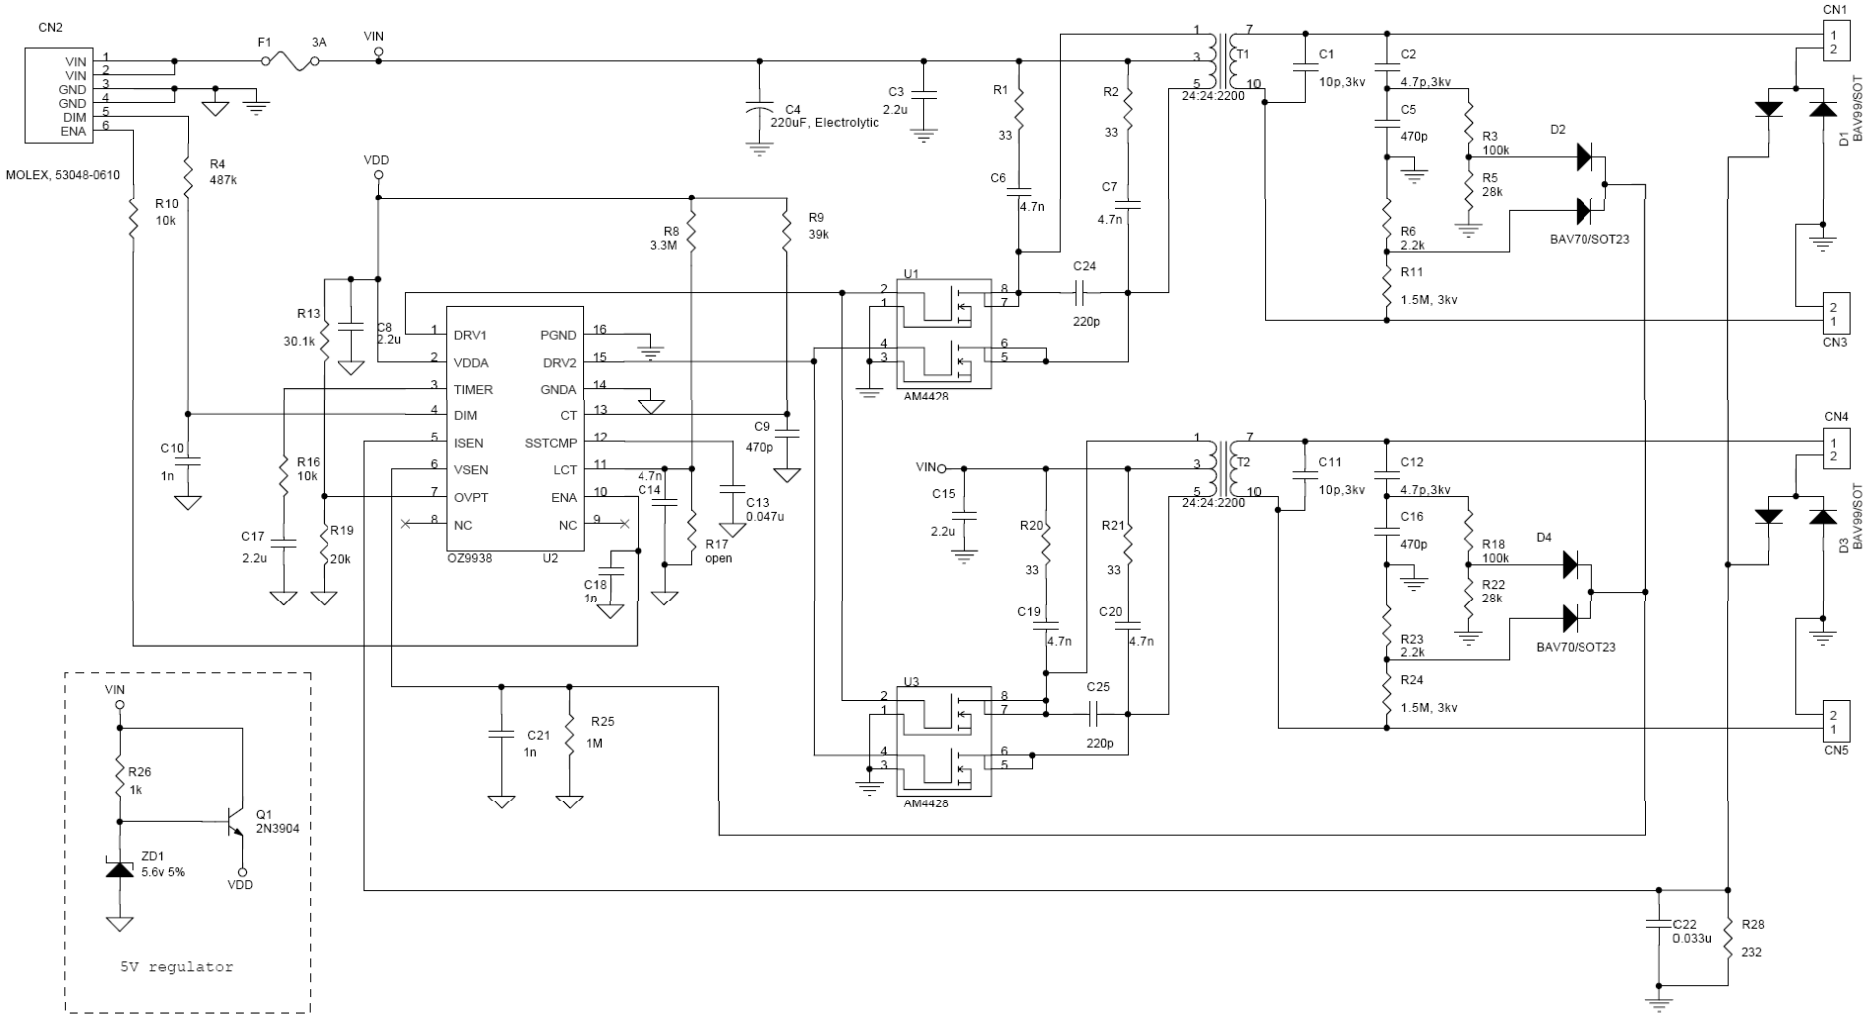

VIN: 10.8V---13.2V
ENA: 0V---1.0V, disable. 2.0V---5.0V, Enable
DIM: 0.2V---1.6V; 0.2V, minimum brightness; 1.6V, maximum brightness

Figure 2