


4. SCHEMATIC CIRCUIT DIAGRAM (GM-2200/EW, ES)


A

B

C

D

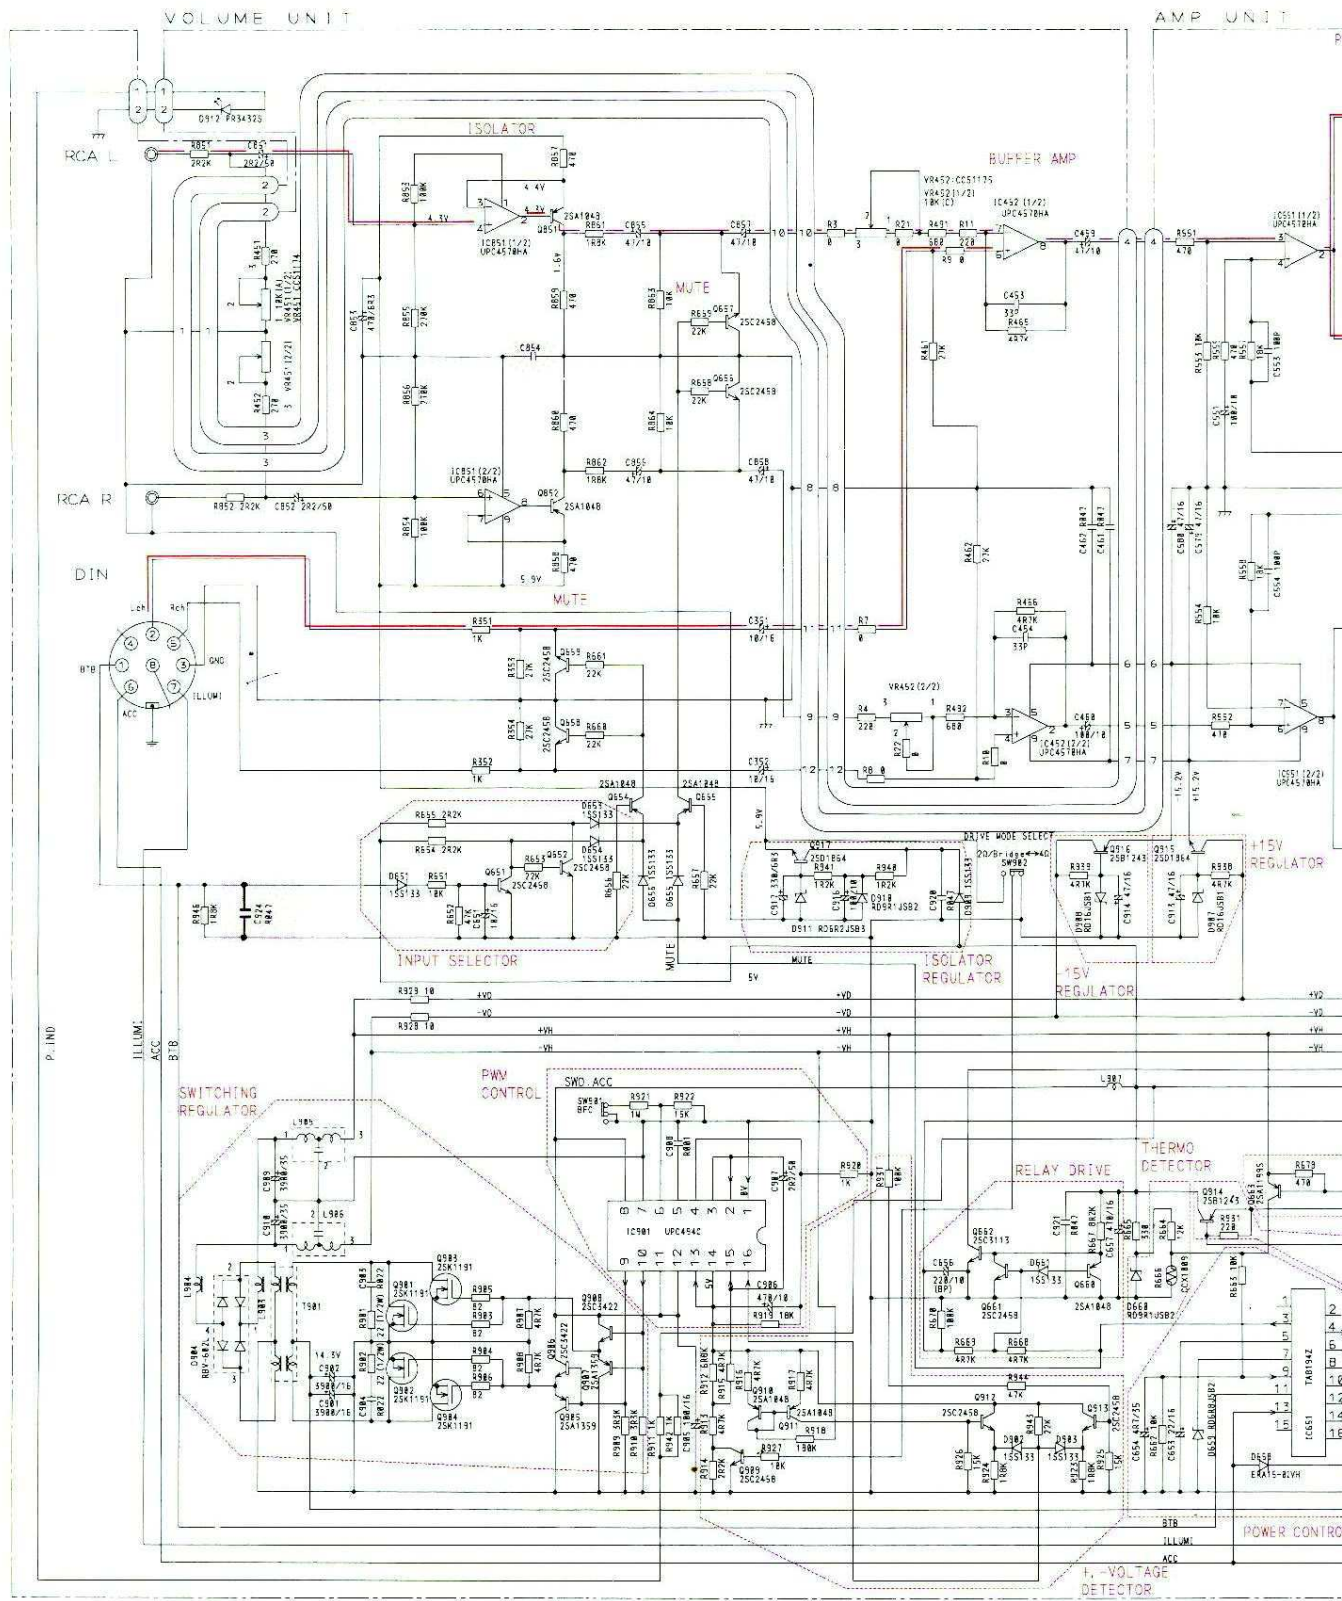

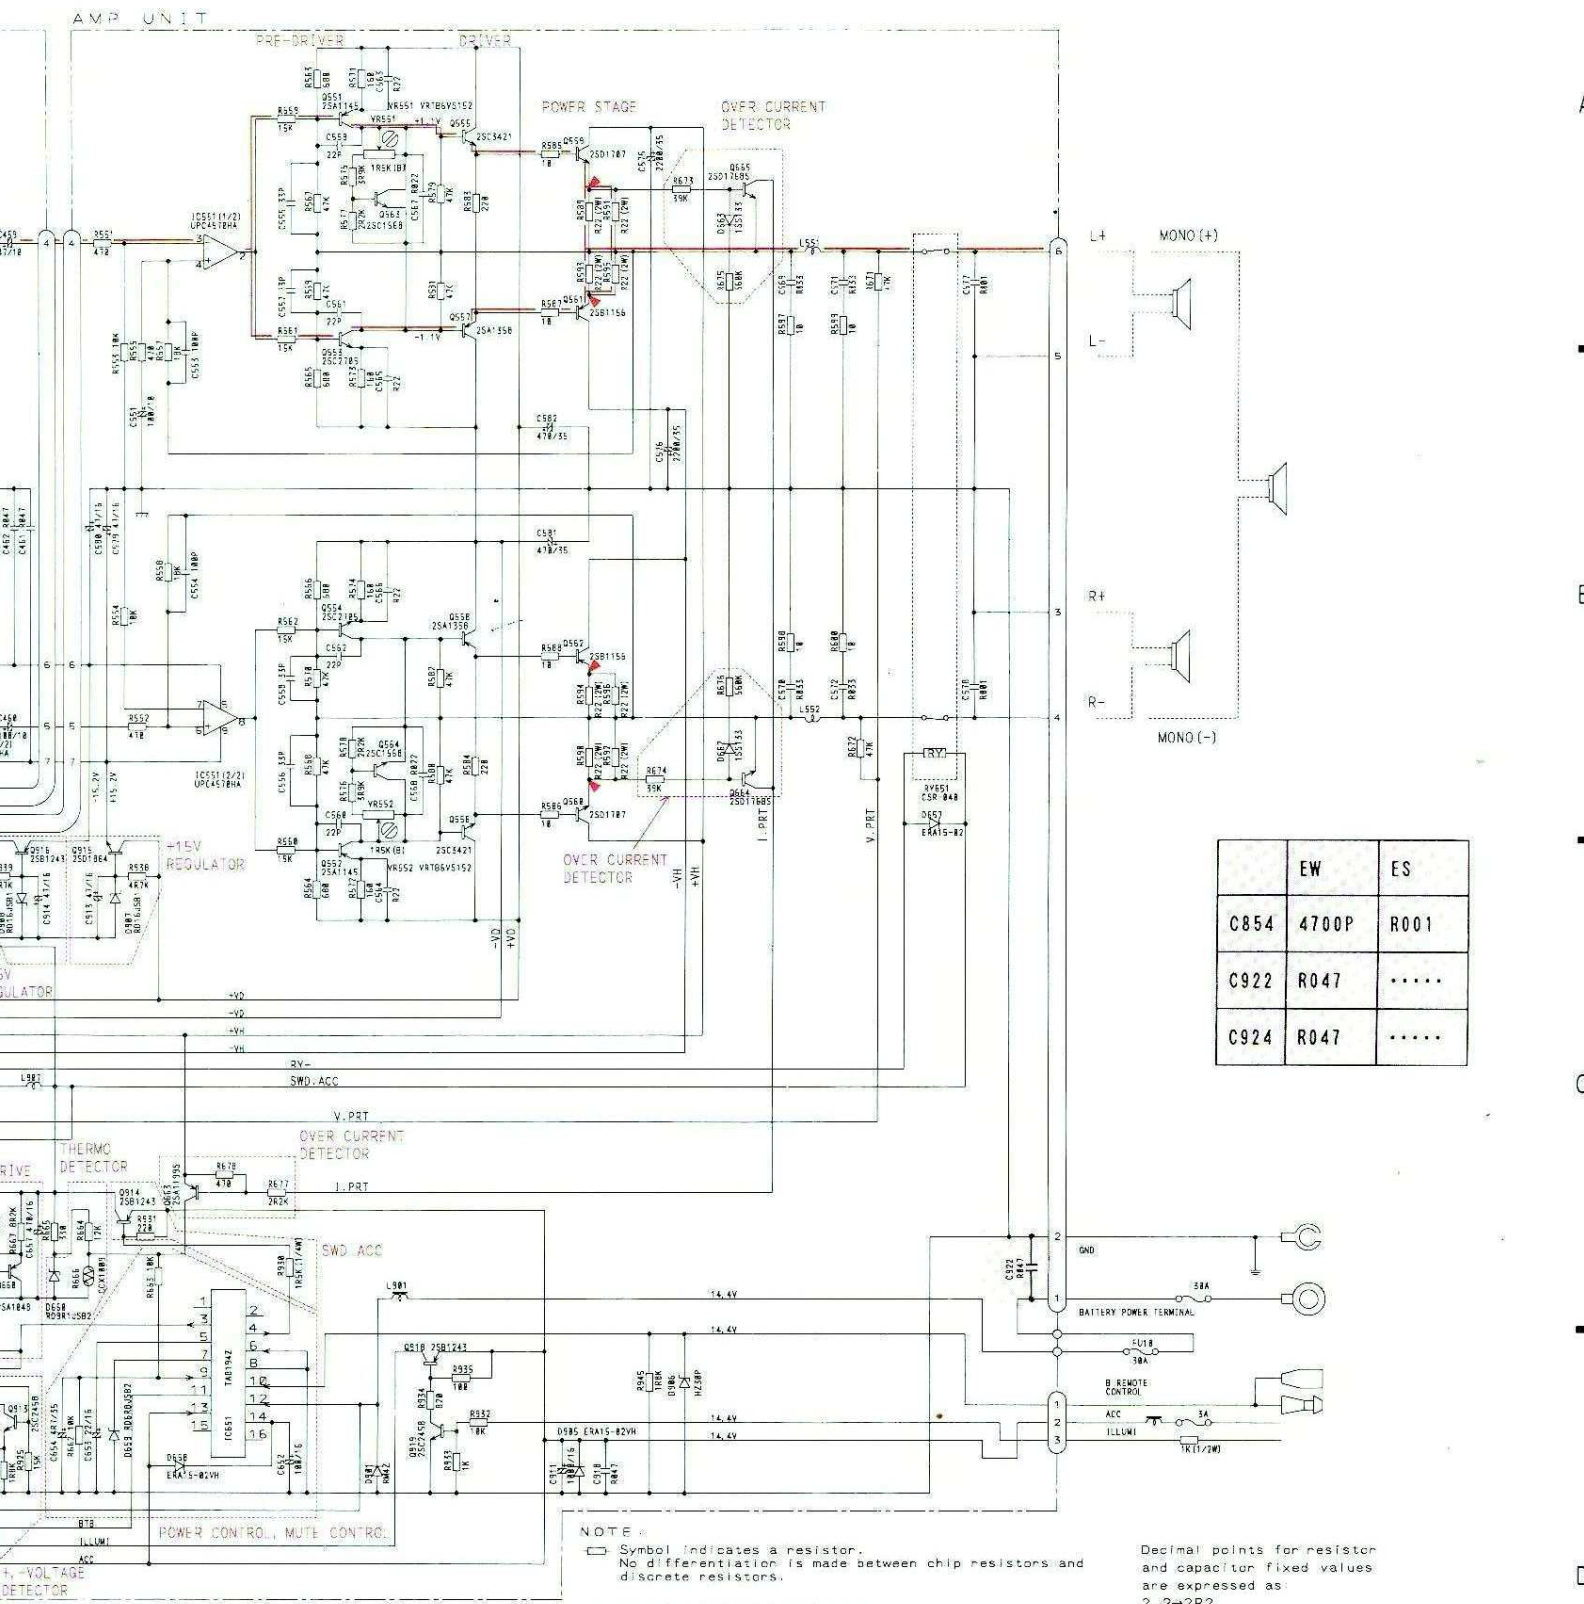

	EW	ES
C854	4700P	R001
C922	R047
C924	R047

NOTE:
 □ Symbol indicates a resistor. No differentiation is made between chip resistors and discrete resistors.
 —○— Symbol indicates a capacitor. No differentiation is made between chip capacitors and discrete capacitors.

Decimal points for resistor and capacitor fixed values are expressed as:
 2.2→2R2
 0.022→R022

SWITCHES:
 AMP UNIT
 SW901 BFC SWITCH LOW-HIGH
 SW902 DRIVE MODE SELECT SWITCH → 2Ω/Bridge=4Ω
 The underlined indicates the switch position.

Fig. 3