



NOTE

- 1 TOLARENCES UNLESS OTHERWISE SPECIFIED: ± 0.2
- 2 ALL DIMENSIONS ARE IN mm
- 3 VIEWING ANGLE: 6 O'CLOCK
- 4 POLARIZER: TRANSLCTIVE, POSITIVE
- 5 MULTIPLEX LEVEL: 1/4 DUTY, 1/3 BIAS
- 6 LCD DRIVING VOLTAGE(Vop): 3.0V
- 7 OPERATING TEMP.: -10°C TO 60°C
STORAGE TEMP.: -20°C TO 70°C
- 8 DISPLAY TYPE: TN
- 9 CONNECTOR: PIN

Dalian Good Display Co.,Ltd.

DESIGN MODEL		EDS809-1	
VAR.	A	DATE	2008.03.31
CUSTOMER MODEL		APPROVED BY	
		CHECKED BY	
PAGE 1/2		DRAWN BY	WU BO

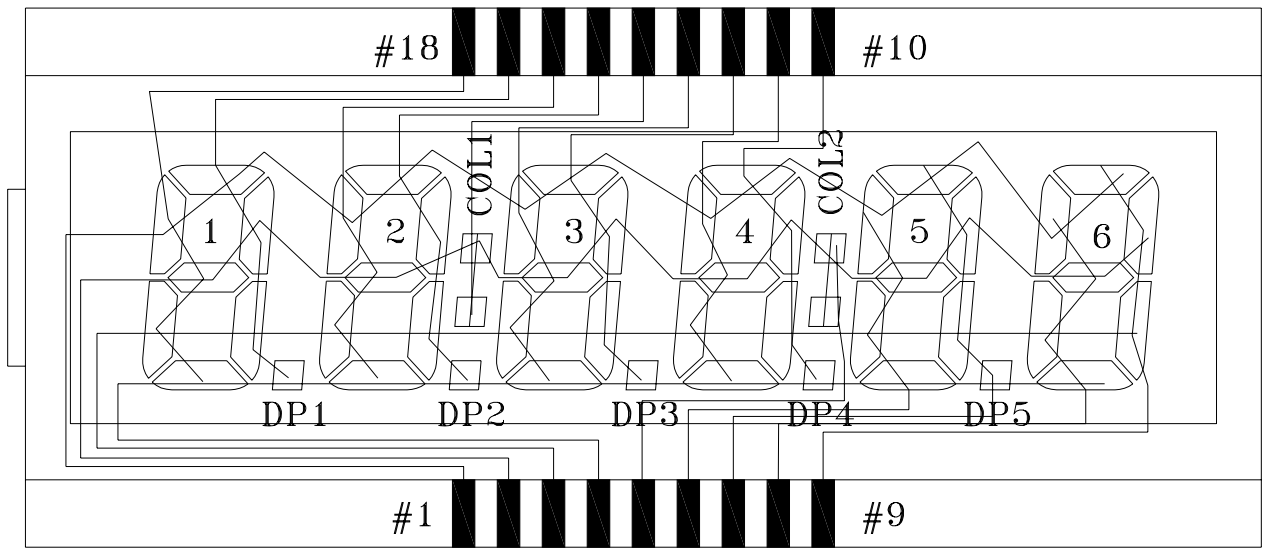

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	COM1					F5	A5	F6	A6	A4	F4	A3	F3		A2	F2	A1	F1
COM2		COM2			COL2	G5	B5	G6	B6	B4	G4	B3	G3	COL1	B2	G2	B1	G1
COM3			COM3			E5	C5	E6	C6	C4	E4	C3	E3		C2	E2	C1	E1
COM4				COM4		D5	DP5	D6		DP4	D4	DP3	D3		DP2	D2	DP1	D1

Dalian Good Display Co.,Ltd.

DESIGN MODEL

EDS809-1

VAR.

A

DATE

2008.03.31

CUSTOMER MODEL

APPROVED BY

CHECKED BY

PAGE 1/2



DRAWN BY

WU BO