


5-2. SCHEMATIC DIAGRAM



Ref. No.	Description	Position	Ref. No.	Description	Position
S1-1 ~ 2	FUNCTION switch (PHONO)	ON	S7-1 ~ 2	MODE switch (STEREO-MONO)	STEREO
S2-1 ~ 2	FUNCTION switch (TUNER)	OFF	S8-1 ~ 2	HI-FILTER switch (ON-OFF)	OFF
S3-1 ~ 2	FUNCTION switch (AUX)	OFF	S9-1 ~ 2	LOUDNESS switch (ON-OFF)	OFF
S4-1 ~ 2	MONITOR switch (SOURCE)	ON	S10-1 ~ 2	SPEAKER switch (REMOTE)	OFF
S5-1 ~ 2	MONITOR switch (TAPE-1)	OFF	S11-1 ~ 2	SPEAKER switch (MAIN)	ON
S6-1 ~ 2	MONITOR switch (TAPE-2)	OFF	S12	POWER switch (ON-OFF)	OFF

**Note:**  
 All resistance values are in ohms. k = 1,000  
 M = 1,000 k.  
 All capacitance values are in  $\mu\text{F}$  except as indicated with p, which means  $\mu\text{F}$ .  
 All voltages are dc measured with a VOM having 20 k ohms/volt input impedance. No signal in.  
 Voltage variations may be noted due to normal production tolerances.

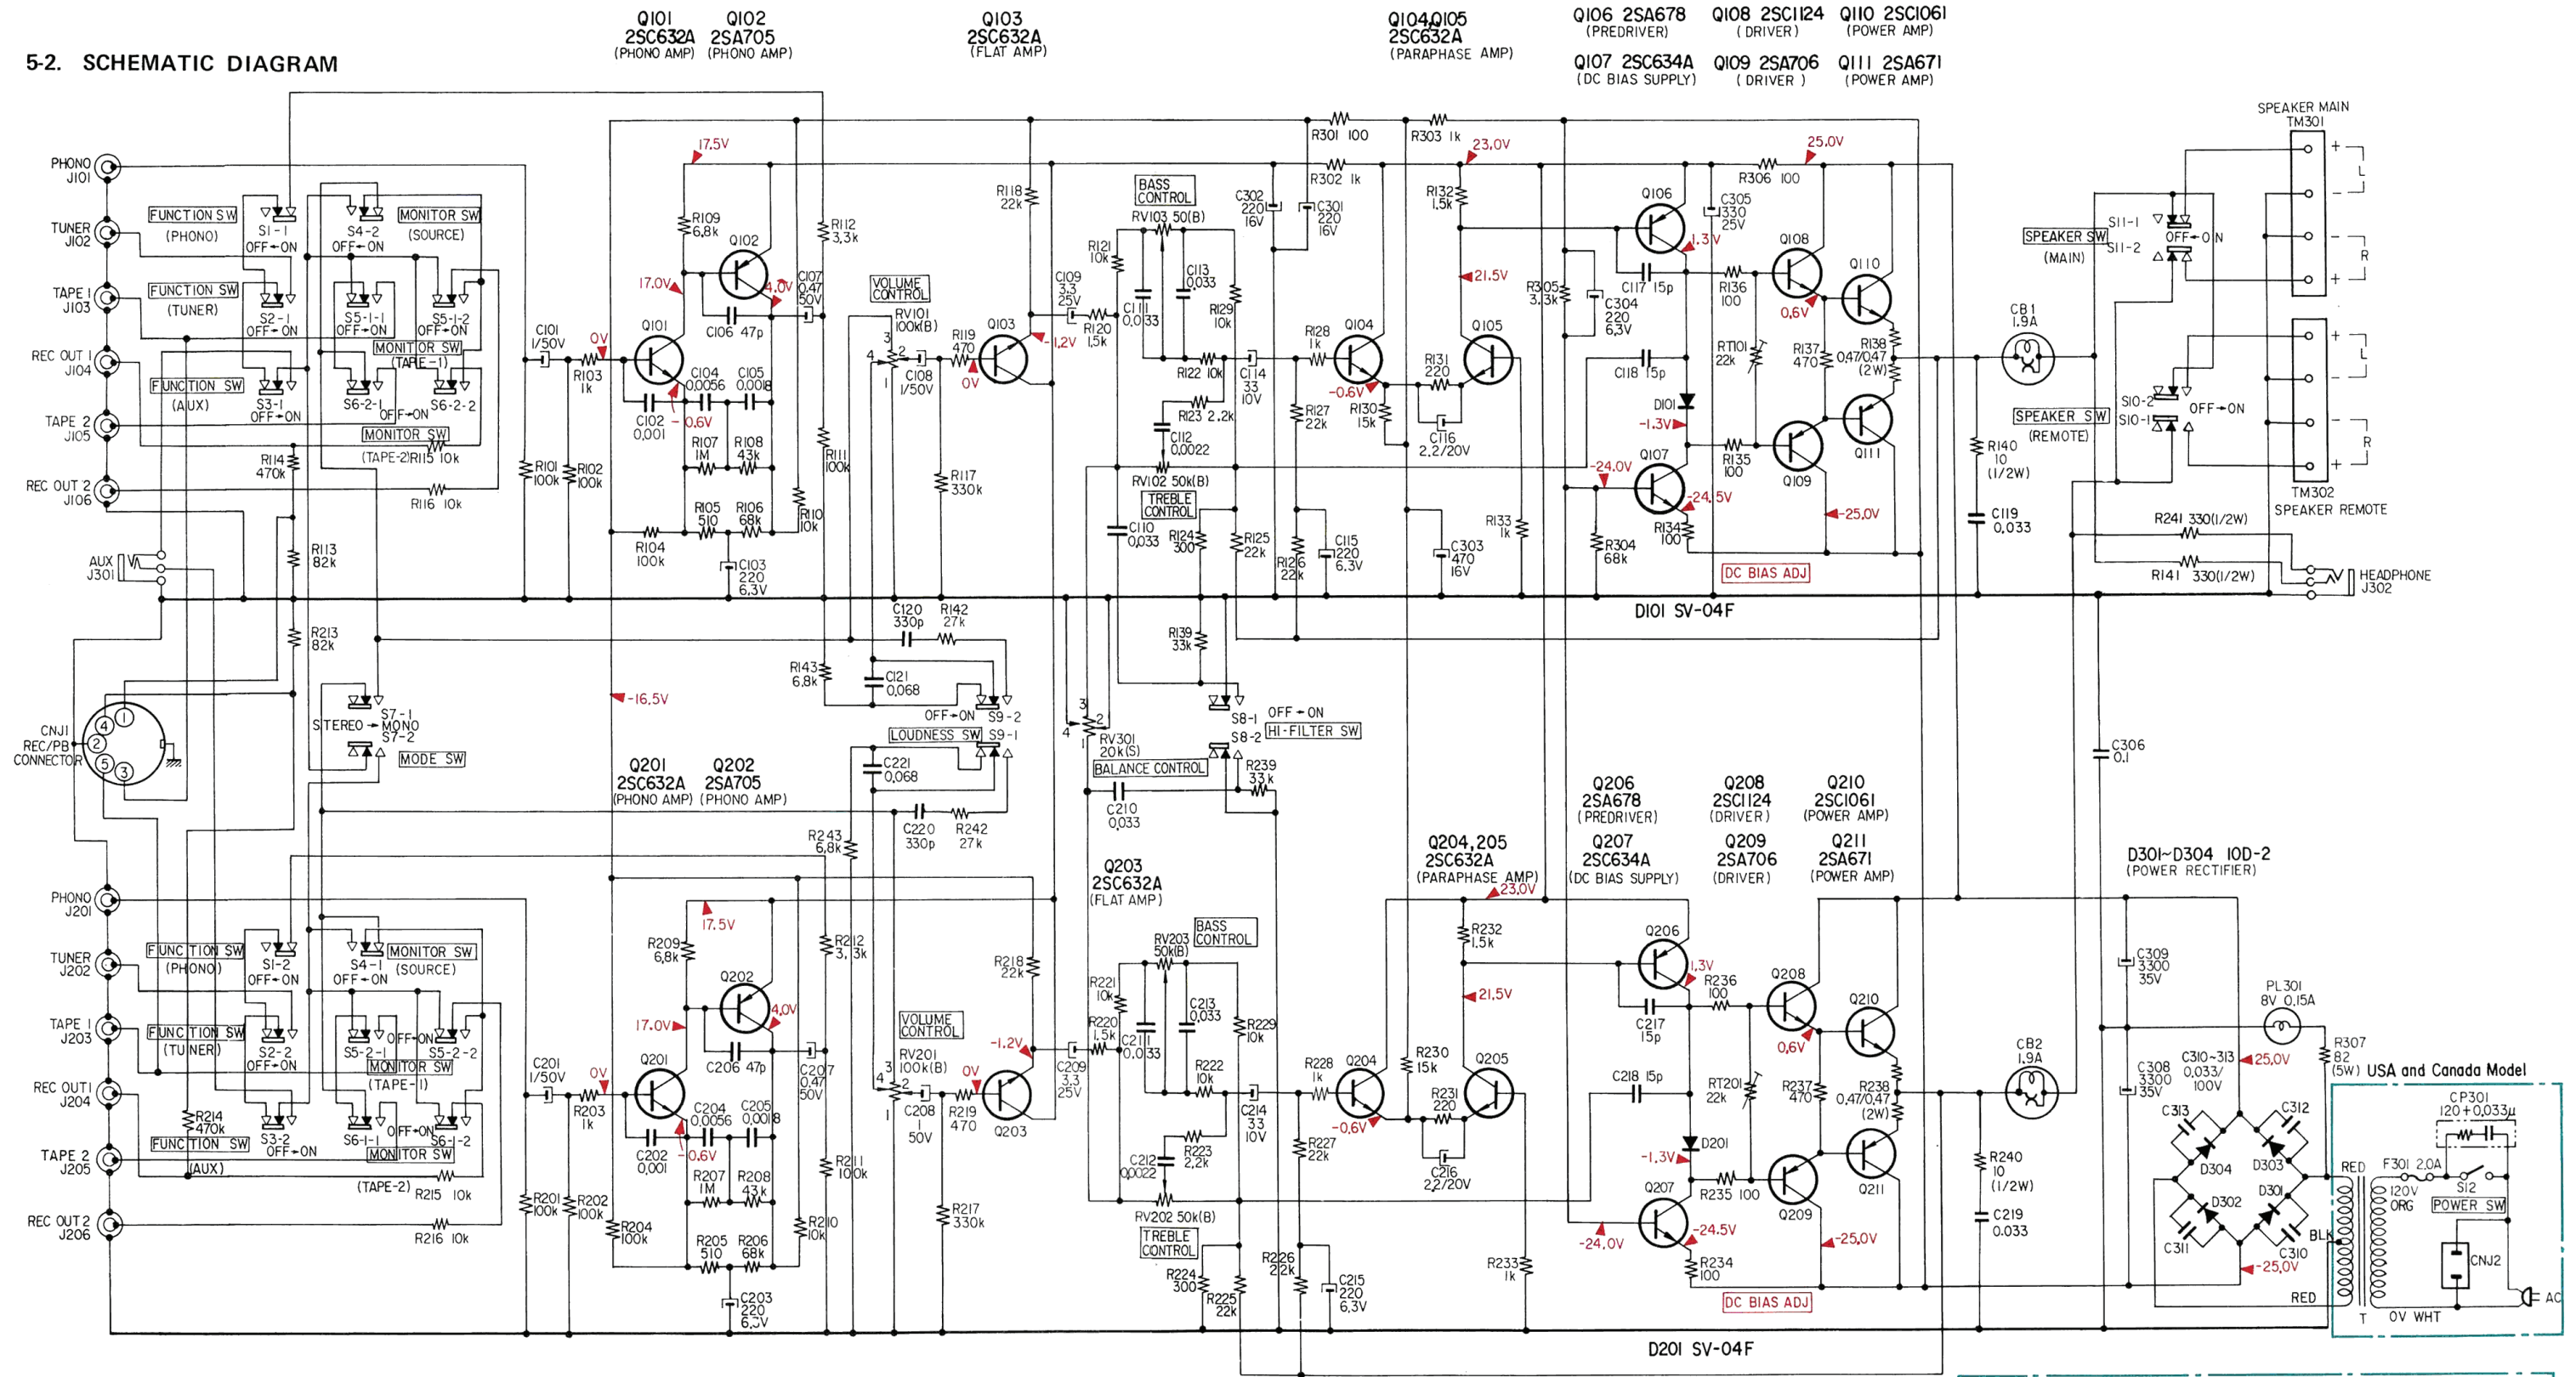