


XLR-PINOUT * = INPUT TRANSFORMER OPTIONAL
 PIN1 = SHIELD
 PIN2 = a, +
 PIN3 = b, -

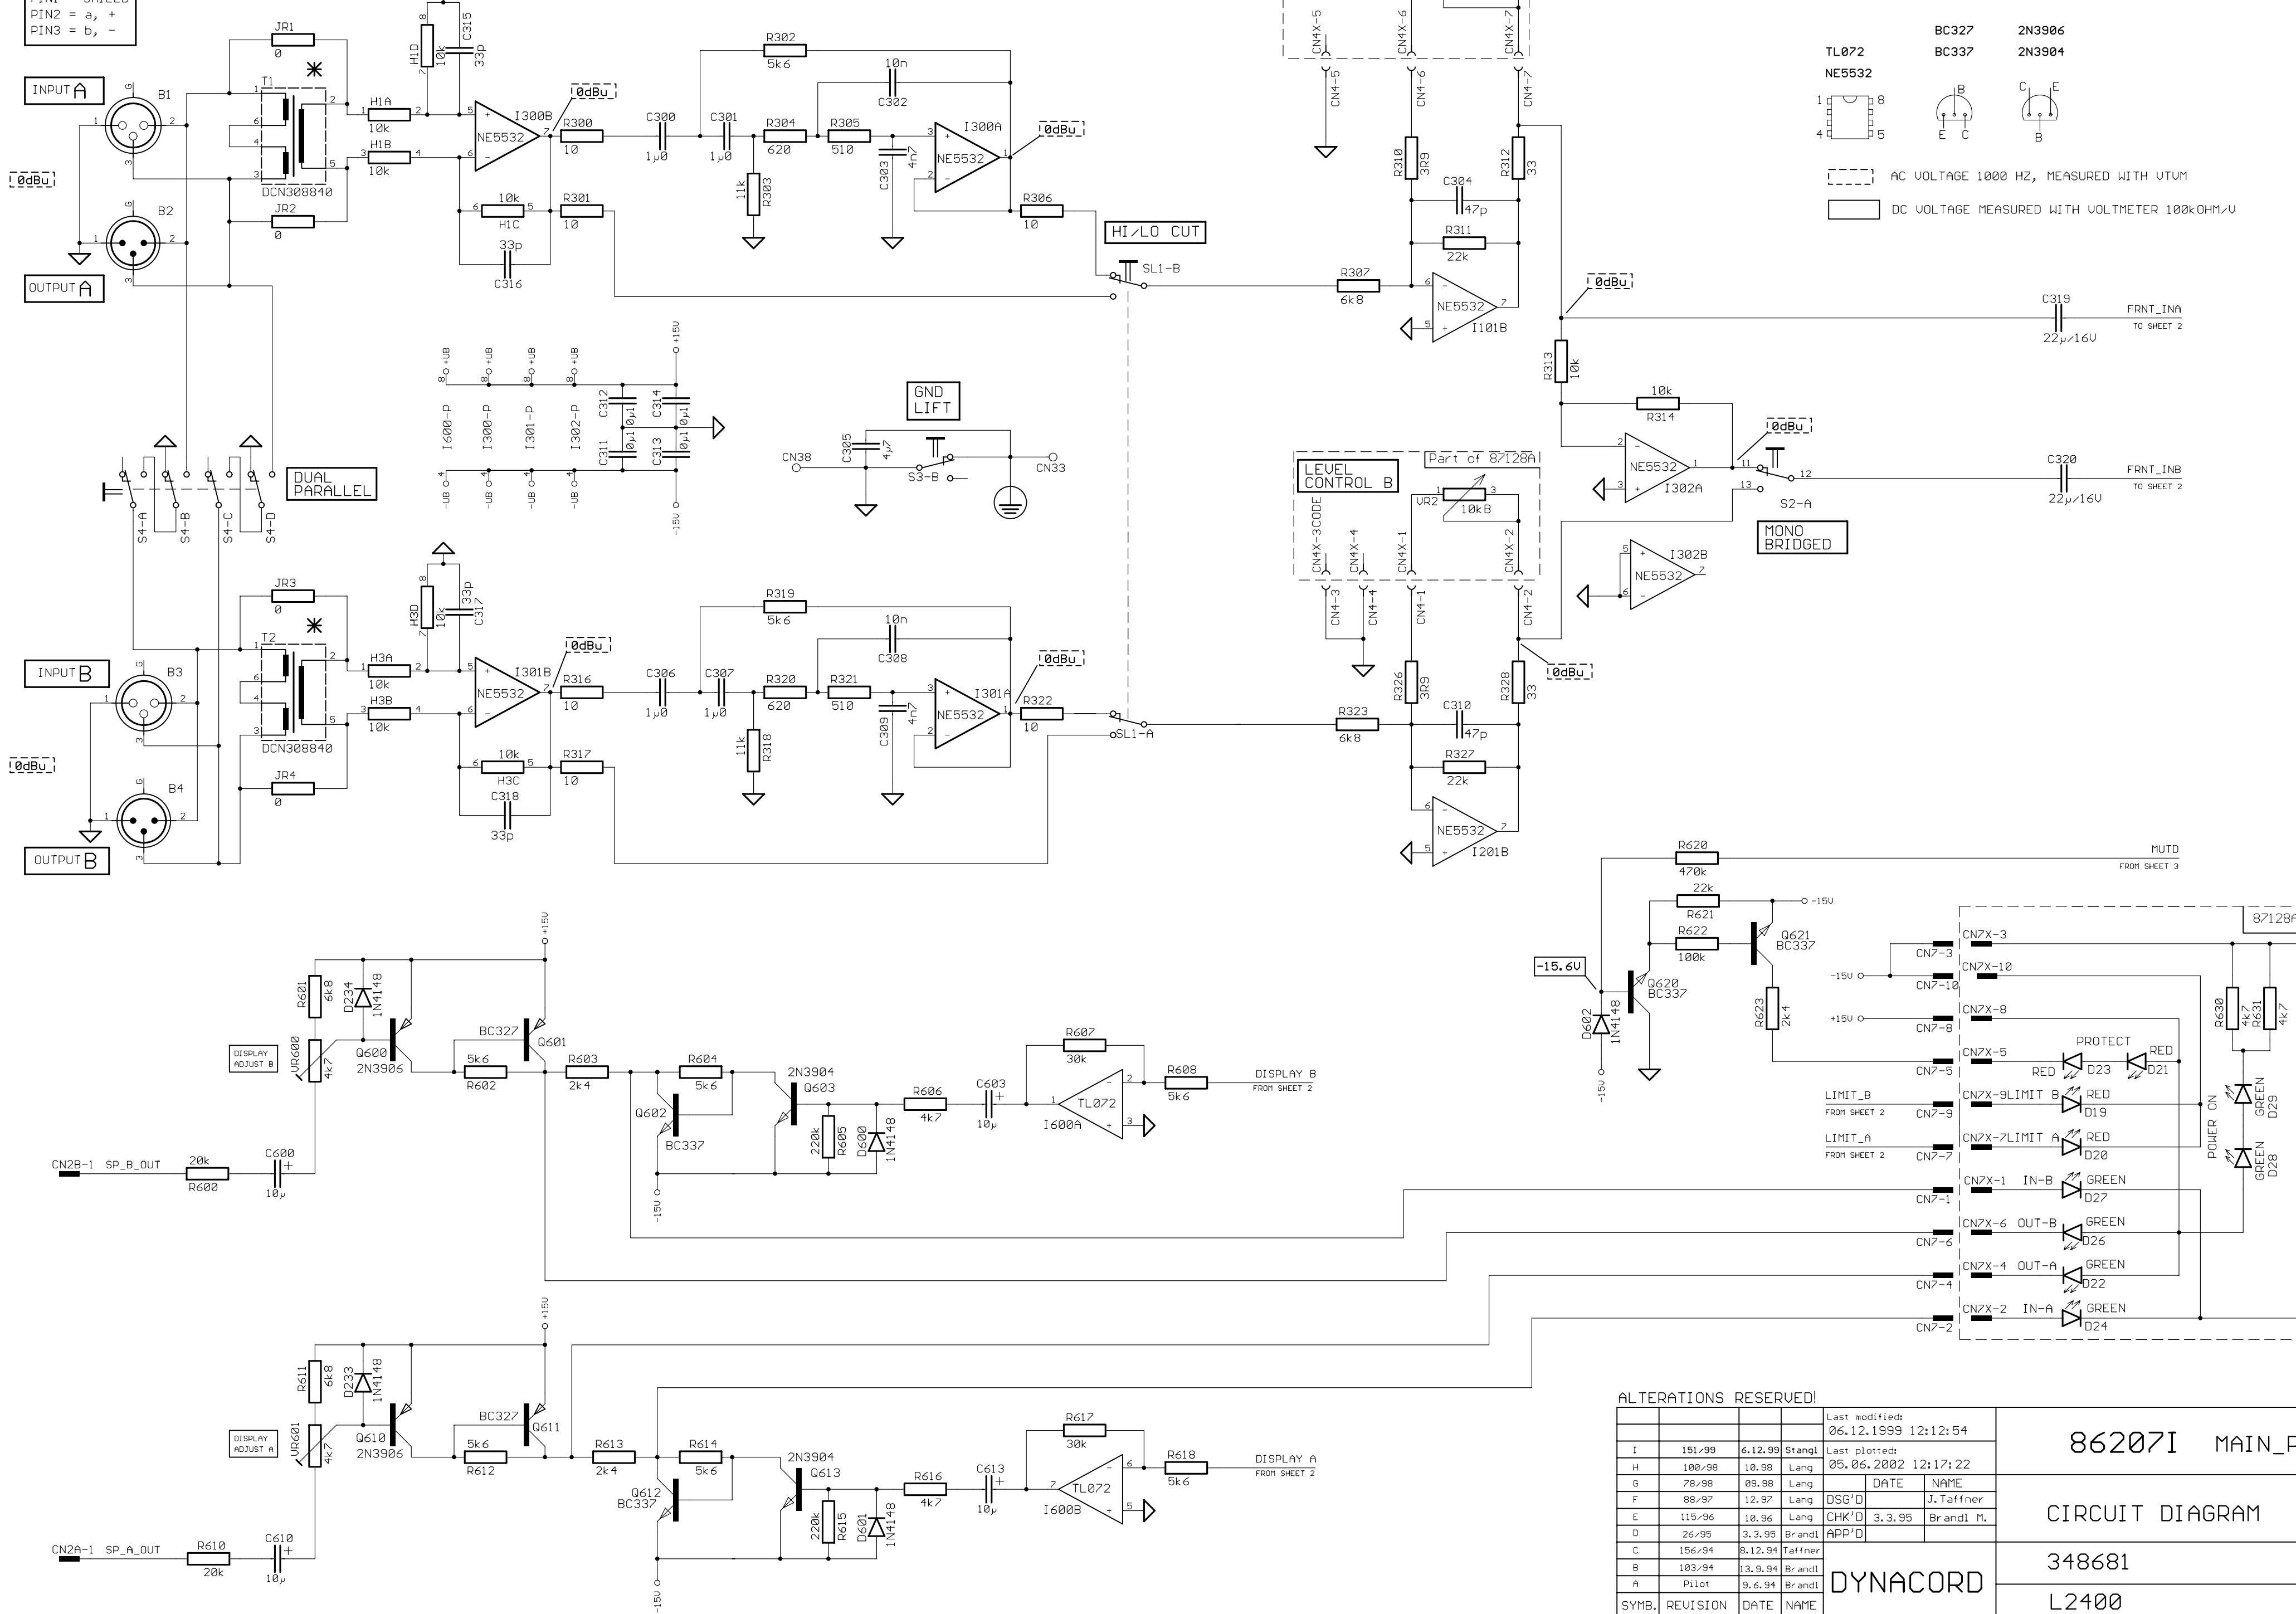

TL072 BC327 2N3906
 NE5532 BC337 2N3904

AC VOLTAGE 1000 HZ, MEASURED WITH UTUM
 DC VOLTAGE MEASURED WITH VOLTMETER 100kOHM/V

ALTERATIONS RESERVED!

				Last modified: 06.12.1999 12:12:54	
I	151/99	6.12.99	Stangl	Last plotted: 05.06.2002 12:17:22	
H	100/98	10.98	Lang	DATE	NAME
G	78/98	09.98	Lang	DSG'D	J. Taffner
F	88/97	12.97	Lang	CHK'D	3.3.95 Brandl M.
E	115/96	10.96	Lang	APP'D	
D	26/95	3.3.95	Brandl		
C	156/94	8.12.94	Taffner		
B	103/94	13.9.94	Brandl		
A	Pilot	9.6.94	Brandl		
SYMB.	REVISION	DATE	NAME	DYNACORD	

86207I MAIN_PCB	
CIRCUIT DIAGRAM	1/3
348681	2-
L2400	