


PROTECTION CIRCUIT FOR OCL POWER AMPLIFIER
AND SPEAKER

- . Over current detecting circuit
Operation at the time of over load, such as a speaker terminal short.
- . DC voltage detecting circuit
Operation at the time when positive or negative DC voltage ($\pm 1.1V$ of detection level) has generated at output terminals.
- . Muting circuit
Transient noise protection when power is ON-OFF.
- . Relay driver circuit (Drive current of 130mA at Max.)
- . Operation by dual power supply.

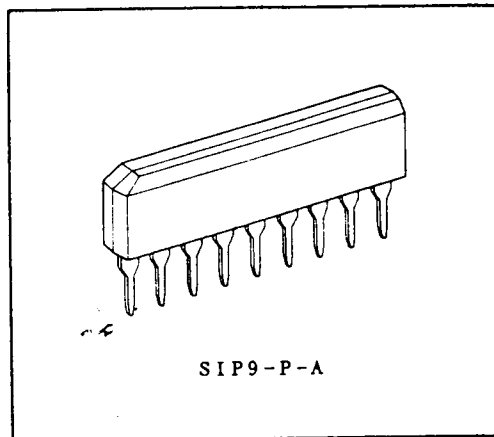

SIP9-P-A

Weight: 0.9g(Typ.)

MAXIMUM RATINGS ($T_a=25^{\circ}C$)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|-----------------------------|-----------|-----------|-------------|
| Supply Voltage | V_{CC} | 60 | V |
| Relay Driver Output Current | I_{OUT} | 130 | mA |
| Power Dissipation | P_D | 500 | mW |
| Operating Temperature | T_{opr} | -20 ~ 75 | $^{\circ}C$ |
| Storage Temperature | T_{stg} | -55 ~ 150 | $^{\circ}C$ |


ELECTRICAL CHARACTERISTICS ($V_{CC}=\pm 50V$, $T_a=25^{\circ}C$)


| CHARACTERISTIC | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------------------|------------------------|---------------|--|------|-------|------|---------|
| Supply Current | $I_{CC ON}$ | - | $V_1 IN=-5V$, $\pm V_{DC}=0V$, SW:OFF | - | 54 | - | mA |
| | $I_{CC OFF}$ | - | $V_1 IN=0V$, $\pm V_{DC}=0V$, SW:OFF | 1.5 | 2.4 | 4 | |
| DC Detector Voltage | $+V_{DC}$ | - | Note 1 | 0.9 | 1.1 | 1.3 | V |
| | $-V_{DC}$ | - | Note 1 | -0.9 | -1.1 | -1.3 | |
| Output Voltage | $V_{OUT(ON)}$ | - | $V_1 IN=-5V$, $\pm V_{DC}=0V$, SW:OFF | - | 1 | 2 | V |
| | $V_{OUT(OFF)}$ | - | $V_1 IN=0V$, $\pm V_{DC}=0V$, SW:OFF | - | 50 | - | |
| Muting Time at Power ON | M.T ($V_{CC ON}$) | - | Note 2 | - | 4 | - | sec |
| Muting Time with Load Shorted | M.T | - | Note 3 | - | 3.5 | - | sec |
| Pin 8 Entering Current | I_8 | - | - | 2 | 8 | - | μA |
| Pin 9 Terminal Voltage | V_9 | - | - | - | 3.1 | - | V |
| Pin 1 Terminal Voltage | V_1 | - | - | - | 0.75 | - | V |
| Pin 5 Terminal Voltage | V_5 | - | - | - | -0.75 | - | V |

MAXIMUM INTO OR OUT CURRENT


| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|----------------|--------|-----------|------|
| Pin 1 Current | I_1 | ± 1.0 | mA |
| Pin 2 Current | I_2 | ± 1.0 | mA |
| Pin 3 Current | I_3 | ± 1.0 | mA |
| Pin 5 Current | I_5 | -6.0 | mA |
| Pin 7 Current | I_7 | 1.0 | mA |
| Pin 9 Current | I_9 | 5.0 | mA |

EQUIVALENT CIRCUIT

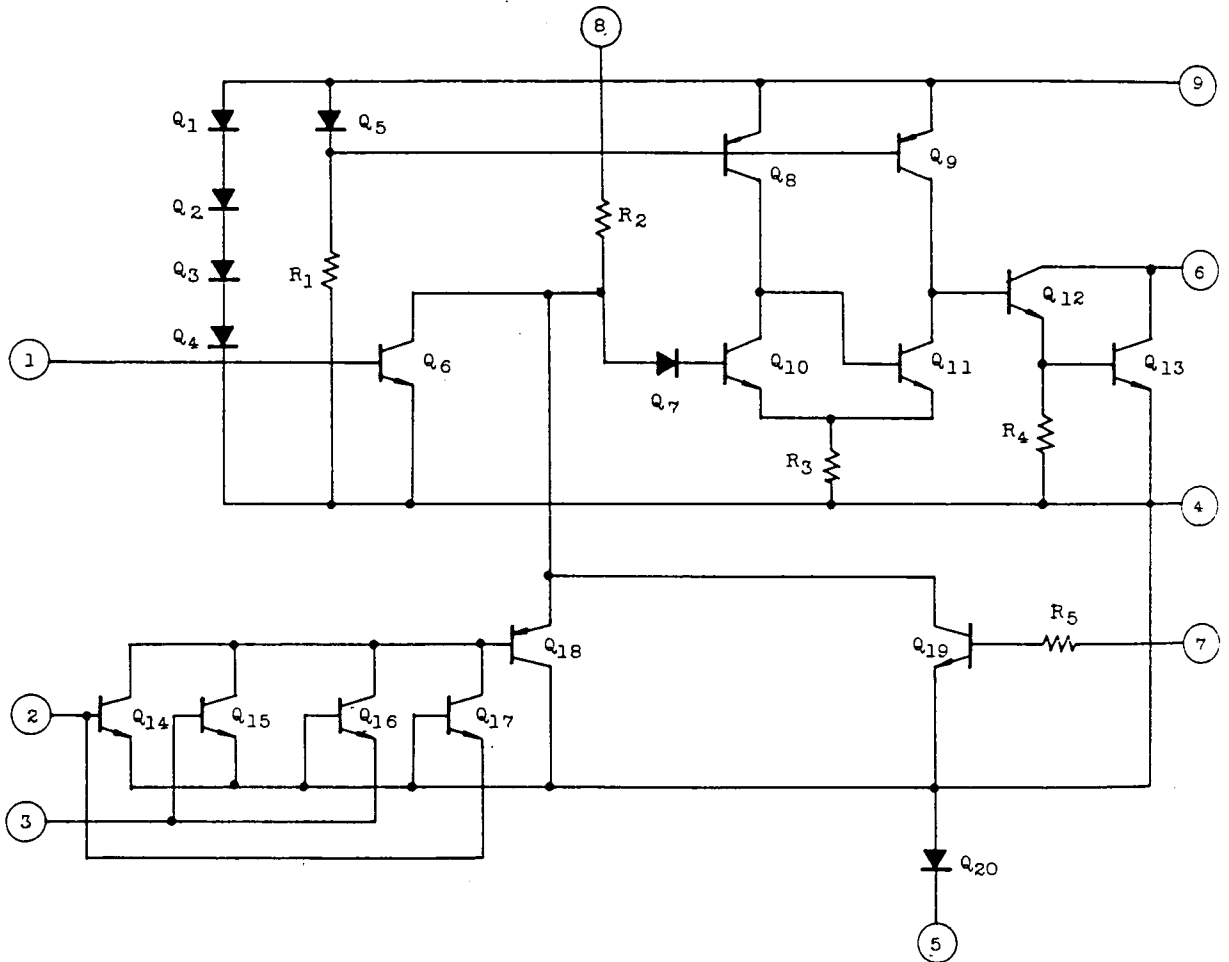

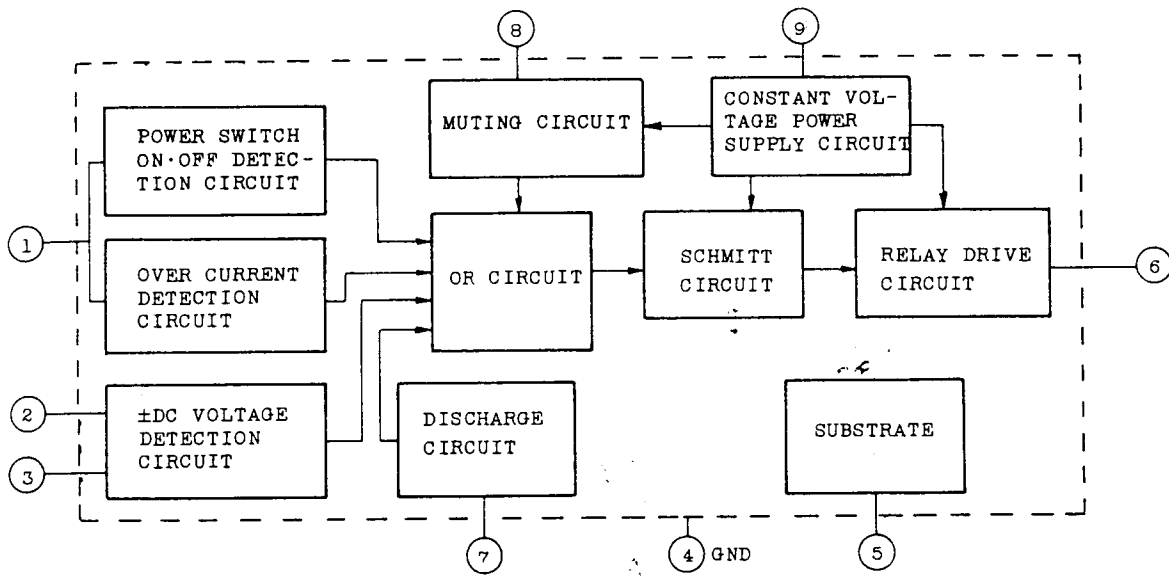

TEST CIRCUIT

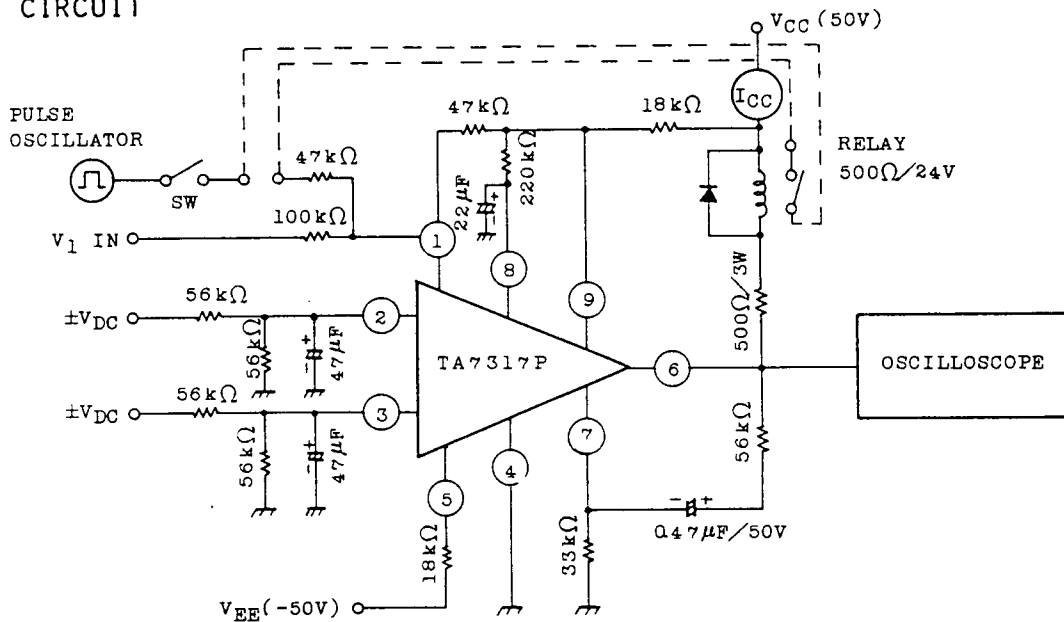

- (Note) 1. The value of $\pm V_{DC}$ at the time when the relay is turned from ON to OFF in the condition of $V_1 IN = -5V$ and SW-OFF.
2. The time required for the relay being turned from OFF to ON at $+V_{CC}$ ON in the condition of $V_1 IN = -5V$, $\pm V_{DC} = 0V$, and SW-OFF.
3. The duration of the relay being able to keep OFF when SW is turned ON in the condition of $V_1 IN = -5V$ and $\pm V_{DC} = 0V$. At that time input pulse is 3ms, -3V.

