


aiwa



NSX-F9

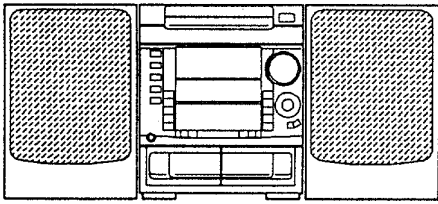

COMPACT DISC STEREO
CASSETTE RECEIVER

- BASIC TAPE MECHANISM : 2ZM-3MK2 PR4NM
- BASIC CD MECHANISM : 6ZG-1 SDFNM

• TYPE : HE

SUPPLEMENT

SYSTEM	CD - CASSEIVER	SPEAKER	REMOTE CONTROLLER
NSX-F9	CX-NF9	SX-NAVF9	RC UNIT, 6AS01

- If requiring information about the CD mechanism, see Service Manual of 6ZG-1. (S/M Code No.09-975-198-00T)
- This Service Manual contains information about the difference between NSX-F9 (HRA) and NSX-F9 (HE). If requiring other information, see Service Manual of NSX-F9 (LHA,HRA,EZA, KA,VA) / F98U / F99U / F9HD / F12LH / F15LH. (S/M Code No. 09-978-206-5FP)
- This model have many changes, especially circuit and wiring diagrams as compared with the previous Service Manual of NSX-F9 (LH,HE). (S/M code No. 09-96B-173-5FP)

SPECIFICATIONS

<FM Tuner section>

Tuning range 87.5 MHz to 108 MHz
Usable sensitivity(IHF) 13.2 dBf
Antenna terminals 75 ohms (unbalanced)

<MW Tuner section>

Tuning range 531 kHz to 1602 kHz (9 kHz step)
 530 kHz to 1710 kHz (10 kHz step)
Usable sensitivity 350 μ V/m
Antenna Loop antenna

<SW Tuner section>

Tuning range 5.900 MHz to 17.900 MHz
Antenna Wire antenna

<Amplifier section>

***Power output** Rated 160 W + 160 W
 (6 ohms, T.H.D.1%, 1 kHz)
 Reference: 200 W + 200 W
 (6 ohms, T.H.D.10%, 1 kHz)

*(without connecting to

the SURROUND SPEAKERS)
Total harmonic distortion 0.1% (20 W, 1 kHz, 6 ohms, DIN AUDIO)

Inputs

VIDEO/AUX : 210mV(adjustable)
 MIC 1, MIC 2: 1.4mV (10 kohms)

Outputs

LINE OUT: 200mV
 SUPER WOOFER: 3.1 V
 SPEAKERS: accept speakers of 6 ohms or more
 SURROUND SPEAKERS: accept speakers of 16 ohms or more
 PHONES (stereo jack) : accepts headphones of 32 ohms or more

<Cassette deck section>

Track format 4 tracks, 2 channels stereo
Frequency response CrO₂ tape: 50 Hz – 16000 Hz
 Normal tape: 50 Hz – 15000 Hz
Signal-to noise ratio 60 dB (Dolby B NR ON, CrO₂ tape peak level)
Recording system AC bias
Heads Deck 1 : playback head x 1
 Deck 2 : Recording/Playback/erase head x 1

<Compact disc player section>


Laser Semiconductor laser ($\lambda = 780$ nm)
D-A converter 1 bit dual
Signal-to-noise ratio 85 dB (1 kHz, 0 dB)
Harmonic distortion 0.05 % (1 kHz, 0 dB)
Wow and flutter Unmeasurable

<Speaker system SX-NAVF9>

Cabinet type 3 way, bass reflex (magnetic shielded type)
Speakers Woofer : 160 mm cone type
 Tweeter : 80 mm cone type
 Super tweeter: 20 mm ceramic type
Impedance 6 ohms
Output sound pressure level 87 dB/W/m
Dimensions (W x H x D) 260 x 353 x 330mm
Weight 5.9 kg

<General>

Power requirements 120 V / 220 – 230 V / 240 V AC, switchable 50/60 Hz
Power consumption 210 W
Dimensions of main unit (W x H x D) 300 x 357.5 x 374 mm
Weight of main unit 12 kg

- Design and specifications are subject to change without notice.
- Dolby noise reduction manufactured under license from Dolby Laboratories Licensing Corporation. "DOLBY" and the double-D symbol  are trademarks of Dolby Laboratories Licensing Corporation.
- The word "BBE" and the "BBE symbol" are trademarks of BBE Sound, Inc. Under license from BBE Sound, Inc.

ELECTRICAL MAIN PARTS LIST

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
MAIN C.B			
J253	87-A60-401-010		JACK, PIN 3P B/R/W HS
J801	87-033-239-010		TERMINAL, 4P HSP-154
FFE801	A8-7ZA-291-030		7ZA-2 YFEUNM

MECHANICAL PARTS LIST 1 / 1

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
4	86-NF9-082-110		PANEL, REAR HEJBNMN<HEJBC2>
4	86-NF9-092-010		PANEL, REAR HE W/O SPEC<HEJBC1>
18	86-NF9-038-110		KEY, DSP OFF
33	86-NF9-037-110		KEY, GEQ OFF

ACCESSORIES / PACKAGE LIST

If can't understand for Description please kindly refer to "REFERENCE NAME LIST".

REF. NO.	PART NO.	KANRI NO.	DESCRIPTION
1	86-NF9-921-010		IB, H(KIT) THAI<HEJBC1>
1	86-NF9-922-010		IB, H(KIT) PHIL<HEJBC2>

REFERENCE NAME LIST

ELECTRICAL SECTION

DESCRIPTION	REFERENCE NAME
ANT	ANTENNAS
C-	CHIP
C-CAP	CAP, CHIP
C-CAP TN	CAP, CHIP TANTALUM
C-COIL	COIL, CHIP
C-DI	DIODE, CHIP
C-DIODE	DIODE, CHIP
C-FET	FET, CHIP
C-FOTR	FILTER, CHIP
C-JACK	JACK, CHIP
C-LED	LED, CHIP
C-RES	RES, CHIP
C-SFR	SFR, CHIP
C-SLIDE SW	SLIDE SWITCH, CHIP
C-SW	SWITCH, CHIP
C-TR	TRANSISTOR, CHIP
C-VR	VOLUME, CHIP
C-ZENER	ZENER, CHIP
CAP, CER	CAP, CERA-SOL
CAP, E	CAP, ELECT
CAP, M/F	CAP, FILM
CAP, TC	CAP, CERA-SOL
CAP, TC-U	CAP, CERA-SOL SS
CAP, TN	CAP, TANTALUM
CERA FIL	FILTER, CERAMIC
CF	FILTER, CERAMIC
DL	DELAY LINE
E/CAP	CAP, ELECT
FILT	FILTER
FLTR	FILTER
FUSE RES	RES, FUSE
MOT	MOTOR
P-DIODE	PHOTO DIODE
P-SNSR	PHOTO SENSER
P-TR	PHOTO TRANSISTOR
POLY VARI	VARIABLE CAPACITOR
PPCAP	CAP, PP
PT	POWER TRANSFORMER
PTR, RES	PTR, MELF
RC	REMOTE CONTROLLER
RES NF	RES, NON-FLAMMABLE
RESO	RESONATOR
SHLD	SHIELD
SOL	SOLENOID
SPKR	SPEAKER
SW, LVR	SWITCH, LEVER
SW, RTRY	SWITCH, ROTARY
SW, SL	SWITCH, SLIDE
TC CAP	CAP, CERA-SOL
THMS	THERMISTOR
TR	TRANSISTOR
TRIMER	CAP, TRIMMER
TUN-CAP	VARIABLE CAPACITOR
VIB, CER	RESONATOR, CERAMIC
VIB, XTAL	RESONATOR, CRYSTAL
VR	VOLUME
ZENER	DIODE, ZENER

MECHANICAL SECTION

DESCRIPTION	REFERENCE NAME
ADHESHIVE	SHEET ADHESHIVE
AZ	AZIMUTH
BAR-ANT	BAR-ANTENNA
BAT	BATTERY
BATT	BATTERY
BRG	BEARING
BTN	BUTTON
CAB	CABINET
CASS	CASSETTE
CHAS	CHASSIS
CLR	COLLAR
CONT	CONTROL
CRSR	CURSOR
CU	CUSHION
CUSH	CUSHION
DIR	DIRECTION
DUBB	DUBBING
FL	FRONT LOADING
FLY-WHL	FLYWHEEL
FR	FRONT
FUN	FUNCTION
G-CU	G-CUSHION
HDL	HANDOL
HIMERON	CLOTH
HINGE, BAT	HINGE, BATTERY
HLDR	HOLDER
HT-SINK	HEAT SINK
IB	INSTRUCTION BOOKLET
IDLE	IDLER
IND, L-R	INDICATOR, L-R
KEY, CONT	KEY, CONTROL
KEY, PRGM	KEY, PROGRAM
KNOB, SL	KNOB, SLIDE
LBL	LABEL
LID, BATT	LID, BATTERY
LID, CASS	LID, CASSETTE
LVR	LEVER
P-SP	P-SPRING
PANEL, CONT	PANEL, CONTROL
PANEL, FR	PANEL, FRONT
PRGM	PROGRAM
PULLY, LOAD MO	PULLY, LOAD MOTOR
RBN	RIBBON
S-	SPECIAL
SEG	SEGMENT
SH	SHEET
SHLD-SH	SHIELD-SHEET
SL	SLIDE
SP	SPRING
SP-SCREW	SPECIAL-SCREW
SPACER, BAT	SPACER, BATTERY
SPR	SPRING
SPR-P	P-SPRING
SPR-PC-PUSH	P-SPRING, C-PUSH
T-SP	T-SPRING
TERM	TERMINAL
TRIG	TRIGGER
TUN	TUNING
VOL	VOLUME
W	WASHER
WHL	WHEEL
WORM-WHL	WORM-WHEEL

サービス技術ニュース	
番号	連絡内容
G-	-
G-	-
G-	-

アイワ株式会社
AIWA CO., LTD.

9301978

Tokyo Japan