

# IEC Connectors & NEMA Receptacles



10A 250Vac

UL CSA 10A 250Vac UL 65°C

Terminal data shown at section end

For stock availability & additional options call the factory

To order:

State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels


**0717-1S Q T 1.0mm**

TYPE      TERMINAL (connector)      TERMINAL (switch)      PANEL thickness

**DIMENSIONS (mm)**


View below is at Y

TYPE	TERMINAL
<b>0717-1-P</b>  Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab
<b>0717-1S State "Non Lit"</b>  Switched Fused Inlet 5x20	<b>Q</b> 4.8 Solder Connector <b>T</b> 4.8 Solder Switch
<b>0717-1S State "Lit"</b>  Switched Fused Inlet 5x20	<b>Q</b> 4.8 Solder Connector <b>T</b> 4.8 Solder Switch
<b>0717-C</b>  Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab
<b>0717-2-C</b> (2k min order)  Double Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab
<b>0717-2-P</b> (2k min order)  Double Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab

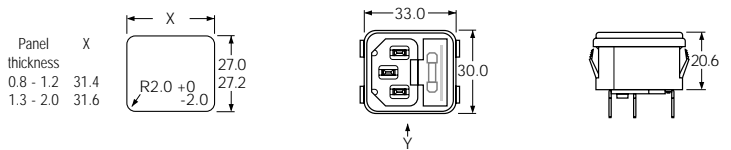


10A 250Vac

DP non-illuminated switch is standard

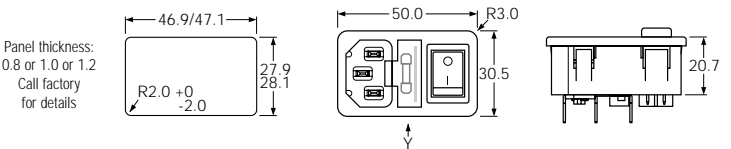


10A 250Vac

DP illuminated switch is standard

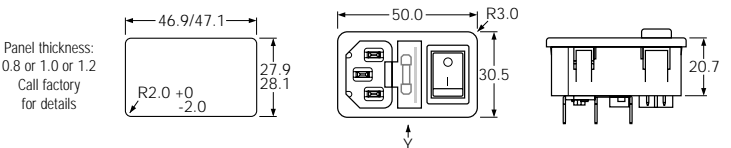


10A 250Vac

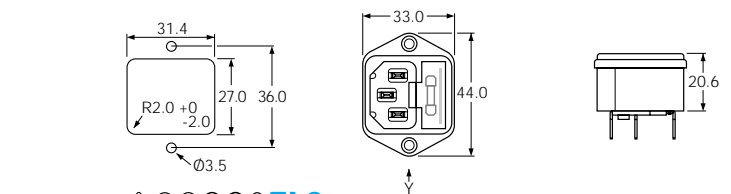


10A 250Vac

0717-2-C For applications (eg medical equipment) where both live & neutral feeds must be fused

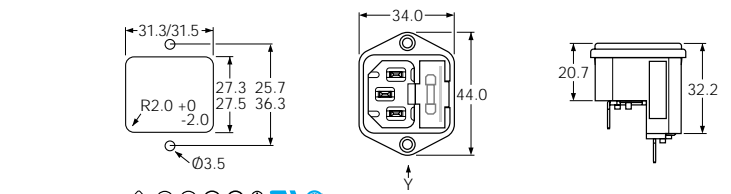





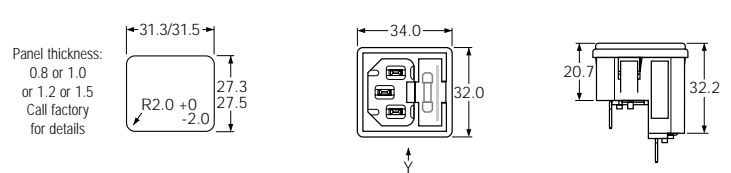






10A 250Vac

0717-2-P For applications (eg medical equipment) where both live & neutral feeds must be fused




10A 250Vac

TYPE	TERMINAL
<b>0721-P</b> (2k min order)  Inlet 	<b>S</b> Solder  
<b>0722-C</b> (2k min order)  Inlet 	<b>Q</b> 4.8 Solder  <b>W</b> 6.3 Tab  
<b>0723-C</b> (2k min order)  Outlet 	<b>Q</b> 4.8 Solder  <b>W</b> 6.3 Tab  

**DIMENSIONS (mm)**

View below is at Y

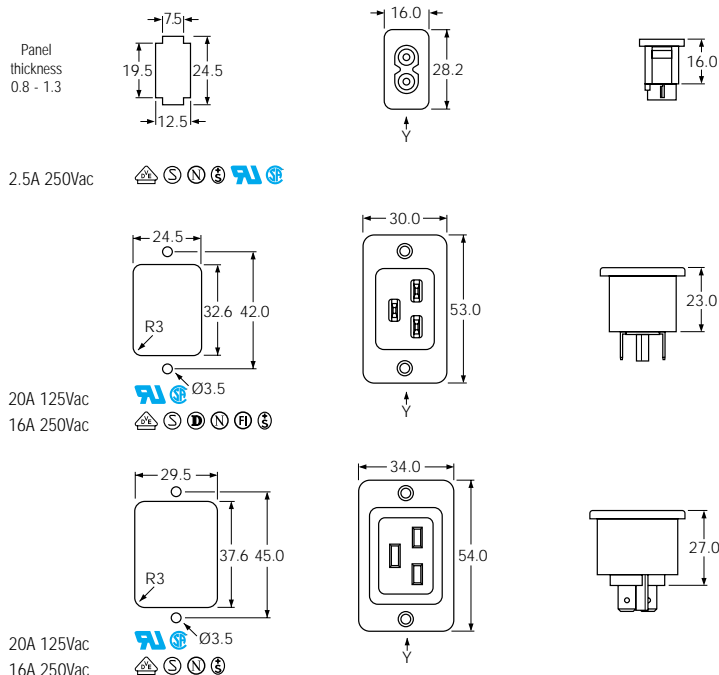













**Technical data**

Mouldings V2 (VO option)  
 Connectors Tin plated solid brass  
 Terminals Silver plated

**Terminal dimensions**

**For Connectors**

**For Switches**

For Connectors									For Switches		
S	N	Q	W	P	L	LS	V12	V16	Slide T	Slide K	Rocker T
2.5mm Solder	4mm Solder	4.8mm Solder/ Fast on	6.3 Fast on	PCB	Solder	2.8mm Solder	12-14 AWG Solid Wire	16 AWG Solid Wire	Solder	2.8mm Solder	4.8mm Solder
											

Note: Designated solder terminals should not be fitted with "Push on", "OD" or "Fast on" type cable connectors