4-2. SCHEMATIC DIAGRAM

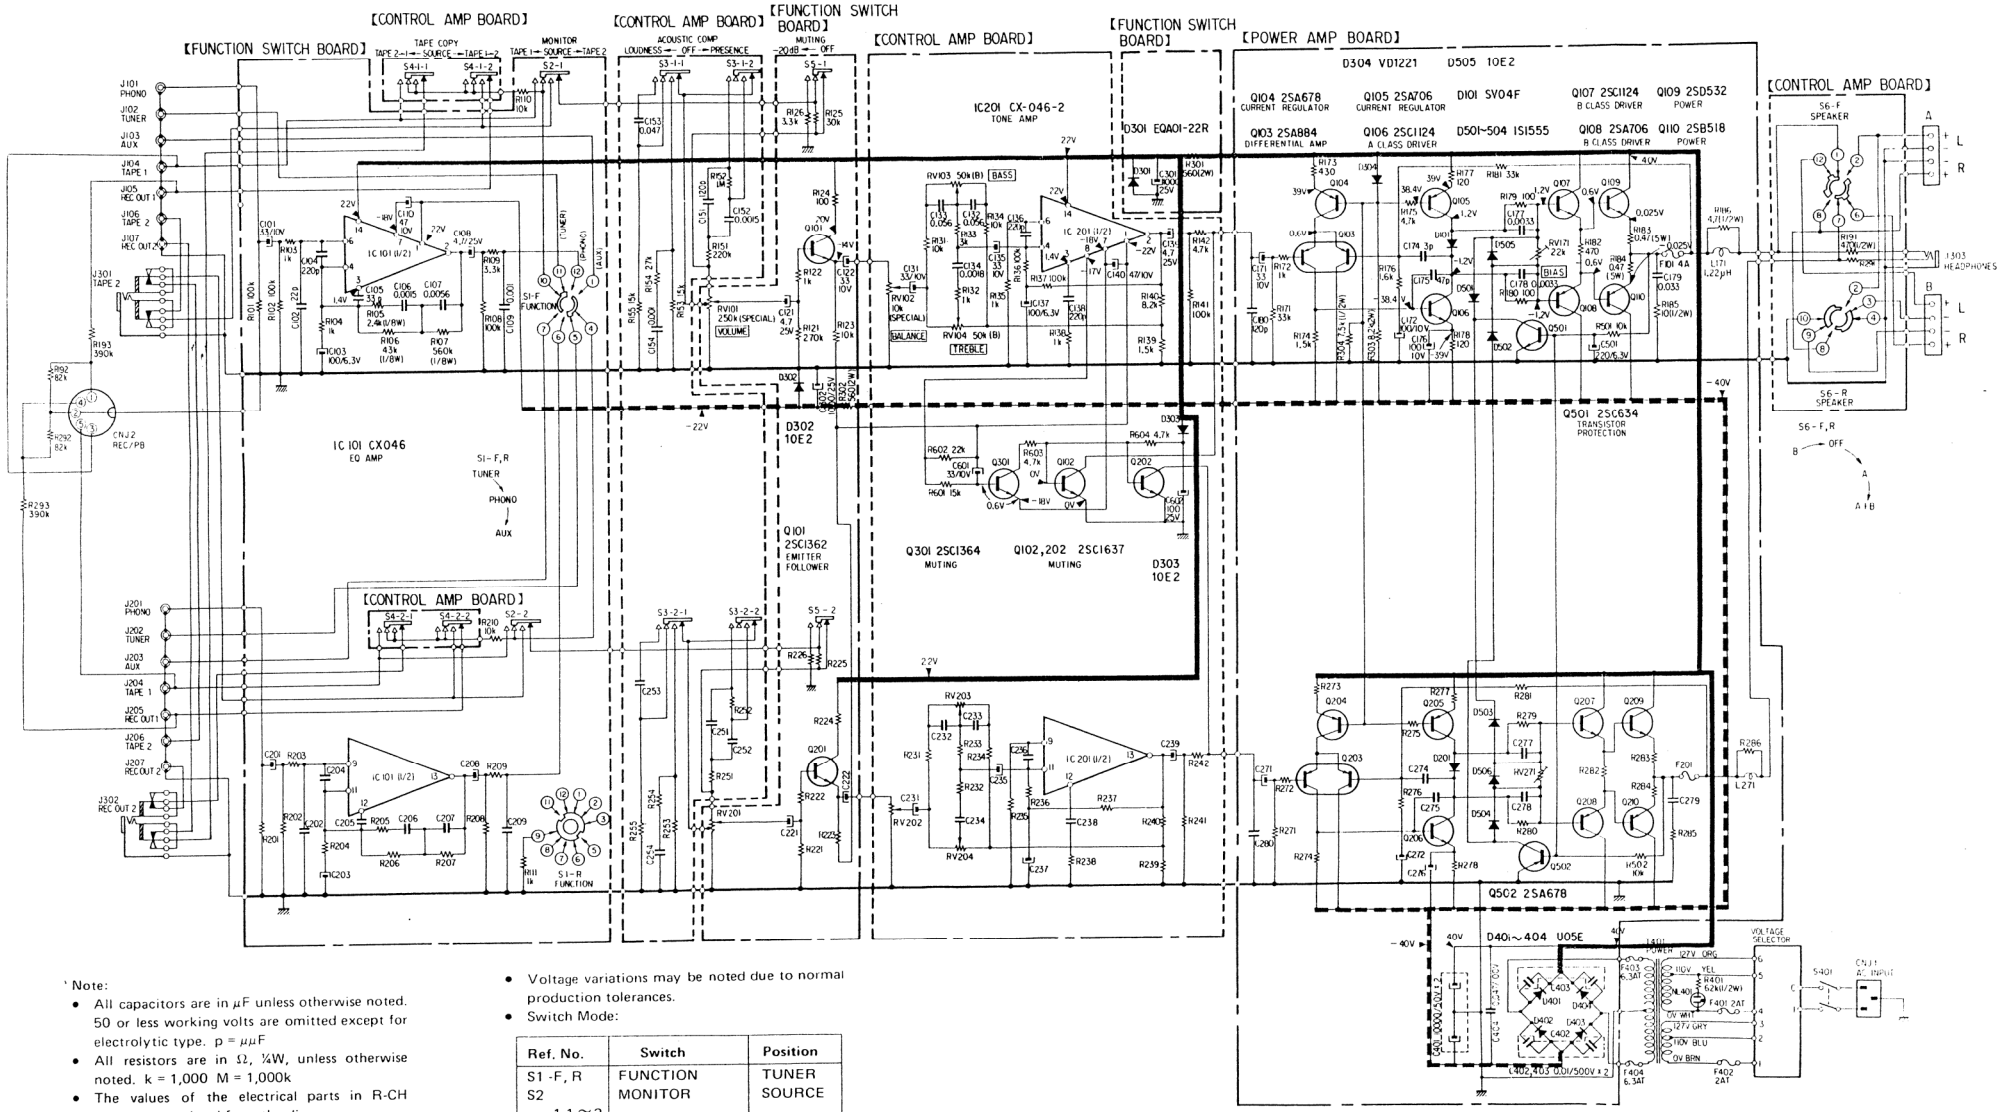

Note:

- All capacitors are in μF unless otherwise noted. 50 or less working volts are omitted except for electrolytic type. p = μμF
- All resistors are in Ω, ¼W, unless otherwise noted. k = 1,000 M = 1,000k
- The values of the electrical parts in R-CH section are omitted from the diagram.
- ⏚ indicates chassis ground.
- ▬▬ indicates B+ circuit.
- ▬▬▬ indicates B− circuit.
- Voltages are DC with respect to ground unless otherwise noted. Readings are taken under no-signal conditions with a VOM (20kΩ/v).
- Voltage variations may be noted due to normal production tolerances.
- Switch Mode:

Ref. No.	Switch	Position
S1 -F, R	FUNCTION	TUNER
S2	MONITOR	SOURCE
S3 -1-1 ~ 2 -2-1 ~ 2	ACOUSTIC COMP	OFF
S4 -1-1 ~ 2 -2-1 ~ 2	TAPE COPY	SOURCE
S5	MUTING	OFF
S6 -F, R	SPEAKER	B
S401	POWER	OFF

This document was created with the Win2PDF “Print to PDF” printer available at

https://www.win2pdf.com

This version of Win2PDF 10 is for evaluation and non-commercial use only.
Visit https://www.win2pdf.com/trial/ for a 30 day trial license.

This page will not be added after purchasing Win2PDF.

https://www.win2pdf.com/purchase/