

MARSCHNER-LAGERTRAFO-PROGRAMM

Range available ex stock




Typ/Type Nennleistung/Power

EI30/10,5 1,5 VA

Sicherheitstrafo / Kurzschlußfest
VDE-geprüft 0570 / EN 61558
ENEC10 / UL 506 / CSA
 Stoßspannungsgeprüft
 Vakuum Epoxidverguss
 Temperaturklasse **ta 70° C/B**
 Cul-Gewicht: 12 g
 Trafo-Gewicht: 75 g

Safety transformer / Short-circuit-proof
VDE-approved 0570 / EN 61558
ENEC10 / UL 506 / CSA
 Surge resistance approved
 Vacuum Epoxy-Casting
 Temperature class **ta 70° C/B**
 Cul-Weight: 12 g
 Trafo-Weight: 75 g

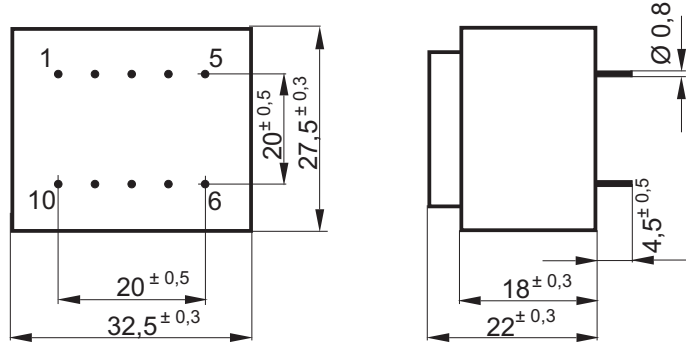

Ansicht auf Stiftseite - Pin view
 Abmessungen - Dimension in mm



Bestell Nr. Order No.	Primär Primary	Sekundär [V] Secondary	Strom [mA] Current	Stiftbelegung Pin	Leerlaufspannung [V] No-Load Voltage ca.	Prüfzeichen / Approvals		
						VDE	UL 1585	UL 506
VN30.10/10939*	230V~	6	250	1+5/7+9	11,1	●		●
VN30.10/10922	230V~	9	166	1+5/7+9	15,7	●		●
VN30.10/10923	230V~	12	125	1+5/7+9	20,8	●		●
VN30.10/10900-1*	230V~	12	125	1+5/7+9	18,9	●	●	●
VN30.10/10924	230V~	15	100	1+5/7+9	25,7	●		●
VN30.10/10925*	230V~	18	83,0	1+5/7+9	32,4	●		●
VN30.10/10962*	230V~	24	62,5	1+5/7+9	43,8	●		●
VN30.10/10963*	230V~	2x 6	2x125,0	1+5/6+7-9+10	2x10,7	●		●
VN30.10/10964*	230V~	2x 9	2x 83,0	1+5/6+7-9+10	2x15,7	●		●
VN30.10/10958*	230V~	2x12	2x 62,5	1+5/6+7-9+10	2x22,5	●		●
VN30.10/10965*	230V~	2x15	2x 50,0	1+5/6+7-9+10	2x25,0	●		●
VN30.10/10966*	230V~	2x18	2x 41,6	1+5/6+7-9+10	2x32,5			●
VN30.10/10967*	230V~	2x24	2x 31,2	1+5/6+7-9+10	2x44,0			●
VN30.10/20939*	115V~	6	250	1+5/7+9	11,1			●
VN30.10/20922*	115V~	9	166	1+5/7+9	15,7			●
VN30.10/20923*	115V~	12	125	1+5/7+9	20,8			●
VN30.10/20900-1*	115V~	12	125	1+5/7+9	18,9			●
VN30.10/20924*	115V~	15	100	1+5/7+9	25,7			●
VN30.10/20925*	115V~	18	83,0	1+5/7+9	32,4			●
VN30.10/20962*	115V~	24	62,5	1+5/7+9	43,8			●
VN30.10/20963*	115V~	2x 6	2x125,0	1+5/6+7-9+10	2x10,7			●
VN30.10/20964*	115V~	2x 9	2x 83,0	1+5/6+7-9+10	2x15,7			●
VN30.10/20958*	115V~	2x12	2x 62,5	1+5/6+7-9+10	2x22,5			●
VN30.10/20965*	115V~	2x15	2x 50,0	1+5/6+7-9+10	2x25,0			●
VN30.10/20966*	115V~	2x18	2x 41,6	1+5/6+7-9+10	2x32,5			●
VN30.10/20967*	115V~	2x24	2x 31,2	1+5/6+7-9+10	2x44,0			●

Wirkungsgrad / Efficiency 45 %

Spannungs-Abfall / Voltage drop 66%

* keine Lagerware
 VPE 128 Stück pro Karton.

* not available ex stock
 Packing unit 128 pieces per box.