

■ Features

- On-chip Hall sensor with two different sensitivity and hysteresis settings for ATS276/277
- 3.5V to 20V operating voltage
- 400mA (avg) output sink current
- Built-in protecting diode only for chip reverse power connecting
- -20°C to 85°C operating temperature
- Low profile 4 pin SIP package

■ Applications

- Dual-coil Brush-less DC Motor
- Dual-coil Brush-less DC Fan
- Revolution Counting
- Speed Measurement


■ General Description

ATS276/277 are integrated Hall sensors with output drivers, mainly designed for electronic commutation of brush-less DC Fan. This IC internally includes the regulator, protecting diode, Hall plate, amplifier, comparator, and a pair of complementary open-collector outputs (**DO**, **DOB**).

While the magnetic flux density (**B**) is larger than operate point (**Bop**), **DO** will turn on (low), and meanwhile **DOB** will turn off (high). Each output is latched until **B** is lower than release point (**Brp**), and then **DO** \ **DOB** transfer each state.


For DC fan application, sometimes need to test power reverse connection condition. Internal diode only protects chip-side but not for coil-side. If necessary, add one external diode to block the reverse current from coil-side.

■ Ordering Information

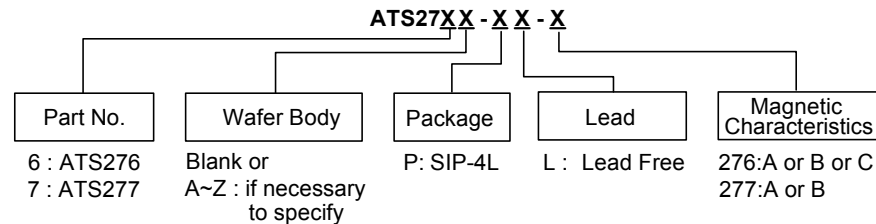


*Packing: Bulk

■ Typical Application Circuit

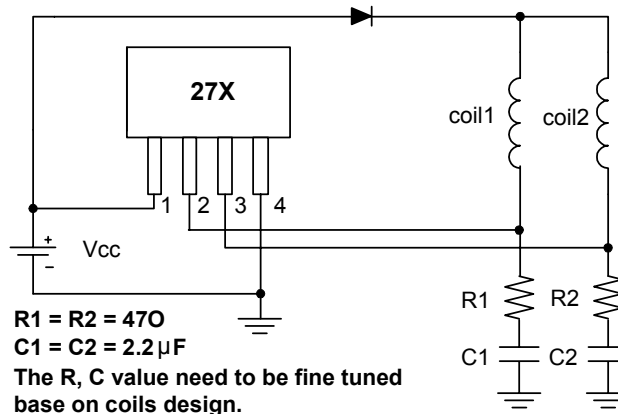


Brush-less DC Fan

■ **Block Diagram**

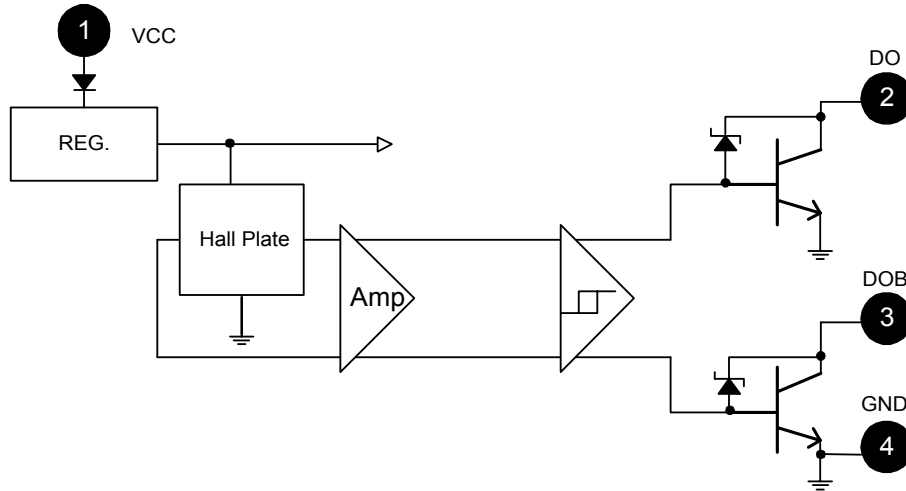

■ **Pin Assignment**



Front View

1 : VCC

2 : DO

3 : DOB

4 : GND

Name	P/I/O	Pin #	Description
Vcc	P	1	Power Supply Input
DO	O	2	Output Pin
DOB	O	3	Output Pin
GND	P	4	Ground

■ **Absolute Maximum Ratings** (at $T_a=25^{\circ}\text{C}$)


Characteristics		Symbol	Values	Unit
Supply voltage		V_{CC}	20	V
Reverse V_{CC} Polarity Voltage		V_{RCC}	-20	V
Magnetic flux density		B	Unlimited	
Output "on" current	Continuous	I_c	0.4	A
	Hold		0.5	
	Peak (Start Up)		0.7	
Operating temperature range		T_a	-20~+85	$^{\circ}\text{C}$
Storage temperature range		T_s	-65~+150	$^{\circ}\text{C}$
Package Power Dissipation		PD	550	mW
Maximum Junction Temp		T_j	150	$^{\circ}\text{C}$

■ **Electrical Characteristics** ($T=+25^{\circ}\text{C}$ $V_{CC} = 4.0\text{V}$ to 20V)

Characteristic	Symbol	Conditions	Min	Typ	Max	Units
Low Supply Voltage	Vce	$V_{CC}=3.5\text{V}$, $I_L=100\text{mA}$		0.4		V
Supply Voltage	Vcc		3.5		20	V
Output Zener Breakdown*	Vz			46		V
Output Saturation Voltage	Vce(sat)	$V_{CC}=14\text{V}$, $I_L=300\text{mA}$		0.3	0.6	V
Output Leakage Current	Icex	$V_{CC}=14\text{V}$, Output Open		<0.1	10	μA
Supply Current	Icc	$V_{CC}=20\text{V}$, Output Open		16	25	mA
Output Rise Time	tr	$V_{CC}=14\text{V}$, $R_L=820\Omega$, $C_L=20\text{pF}$		3.0	10	μs
Output Falling Time	tf	$V_{CC}=14\text{V}$, $R_L=820\Omega$, $C_L=20\text{pF}$		0.3	1.5	μs
Switch Time Differential	Δt	$V_{CC}=14\text{V}$, $R_L=820\Omega$, $C_L=20\text{pF}$		3.0	10	μs

*Note: The Vz may vary with the inductance/resistance of DC Fan. In order to reduce the risk of dynamic operation, the capacitor/resistor is recommended to add below the DO/DOB as Application Circuit (on page 1).

■ **Test Circuit**

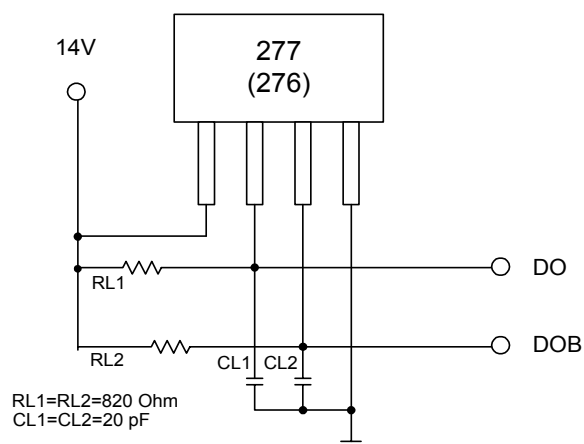

■ Magnetic Characteristics(Ta=+25°C)

(1mT=10 Gauss)

A grade



Characteristic		Symbol	Min.	Typ.	Max.	Unit
Operate Point	ATS276	Bop	10	-	50	Gauss
	ATS277		10	-	50	
Release Point	ATS276	Brp	-50	-	-10	Gauss
	ATS277		-50	-	-10	
Hysteresis	ATS276	Bhy	-	75	-	Gauss
	ATS277		-	75	-	

B grade

Characteristic		Symbol	Min.	Typ.	Max.	Unit
Operate Point	ATS276	Bop	5	-	70	Gauss
	ATS277		5	-	70	
Release Point	ATS276	Brp	-70	-	-5	Gauss
	ATS277		-70	-	-5	
Hysteresis	ATS276	Bhy	-	75	-	Gauss
	ATS277		-	75	-	




C grade

Characteristic		Symbol	Min.	Typ.	Max.	Unit
Operate Point	ATS276	Bop	-	-	100	Gauss
Release Point	ATS276	Brp	-100	-	-	Gauss
Hysteresis	ATS276	Bhy	-	75	-	Gauss

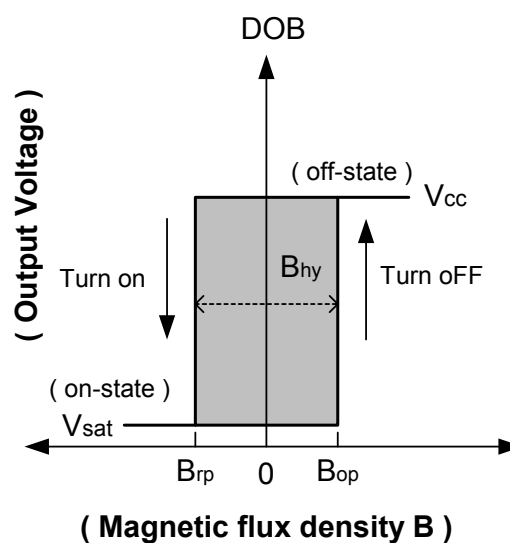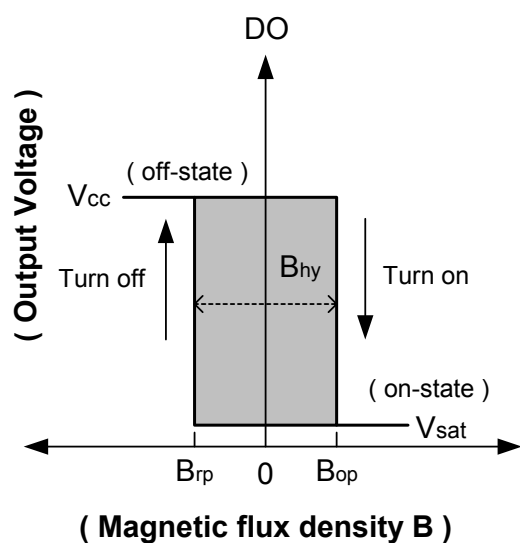


■ Performance Characteristics (SIP4)


Ta (°C)	25	50	60	70	80	85	90	95	100
Pd (mW)	550	440	396	352	308	286	264	242	220
Ta (°C)	105	110	115	120	125	130	135	140	150
Pd (mW)	198	176	154	132	110	88	66	44	0

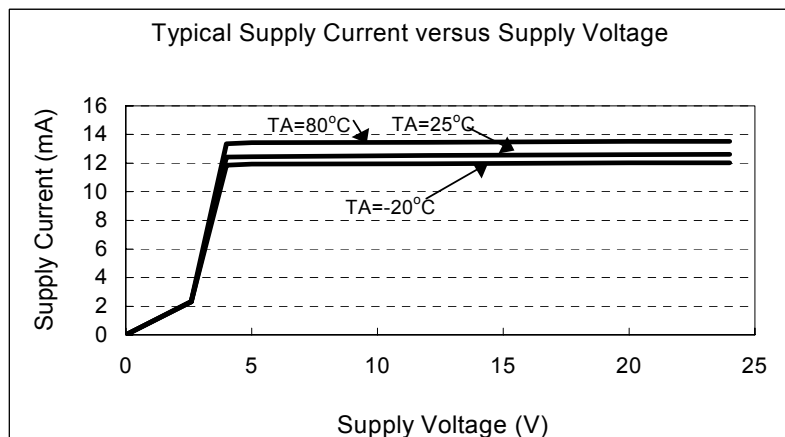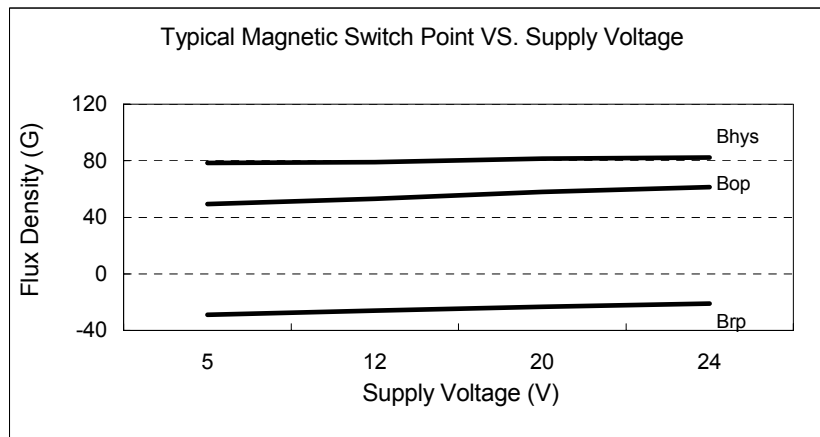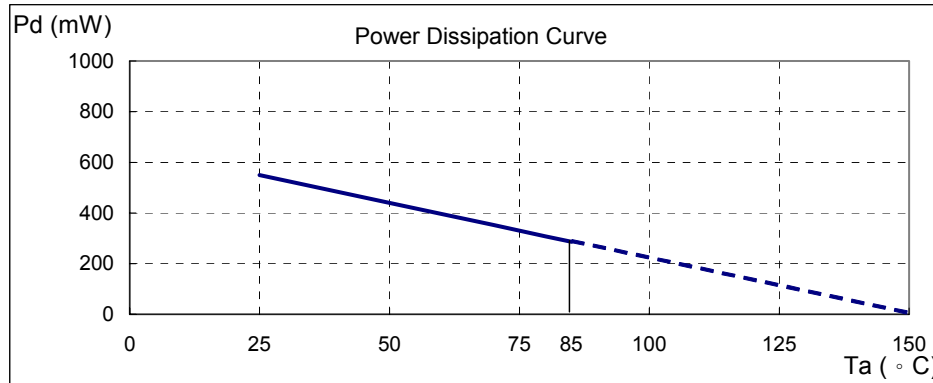

■ **Operating Characteristics**

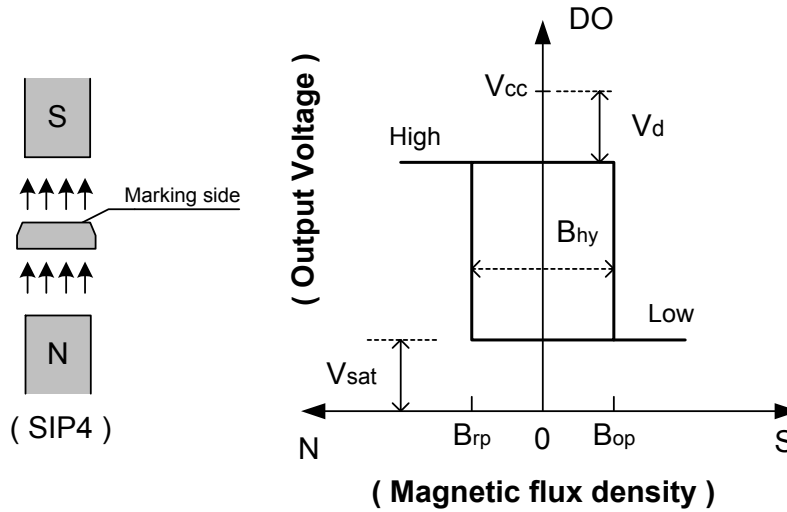


■ **Marking Information**

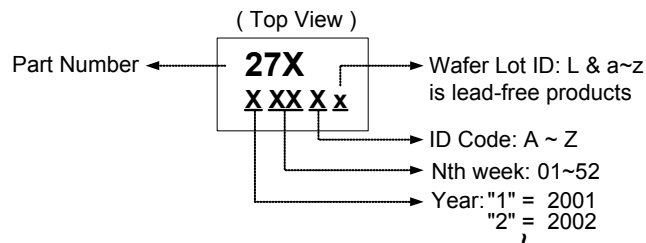


■ Package Information


Active Area Depth



Package Sensor Location



Package Dimension

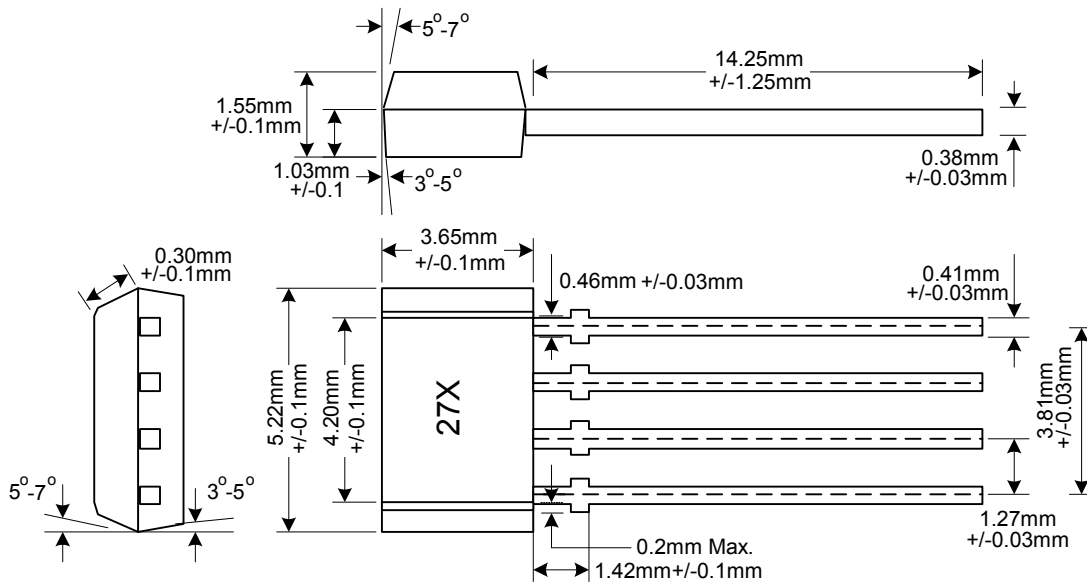



易亨電子股份有限公司
Anachip Corporation

聯絡訊息



易亨電子股份有限公司
Anachip Corporation

臺灣易亨電子大陸代理商：

景凌達(香港)有限公司

GOLDLIGHT(HONGKONG) CO.,LTD

深圳市景凌達電子有限公司

SHENZHEN GOLDLIGHT ELECTRONICS CO.,LTD

Govin(龍曉飛)

TEL:0755-28132705(EXT:8688) 61331851(EXT:8688) 83263976

FAX:0755-83263978 28132705(EXT:88)

Mobile:13802560427

MSN:govin168@hotmail.com

Http://www.anachip.net

Http://www.anachipCN.com

Http://www.anachip.com.tw

E-mail:govin@goldlight88.com

E-mail:govin@anachip.net

ADD: 深圳市福田区振華路桑達電子區華明大廈318室