AVR Download Adapter

If VCC is 2.7V make D1 short.
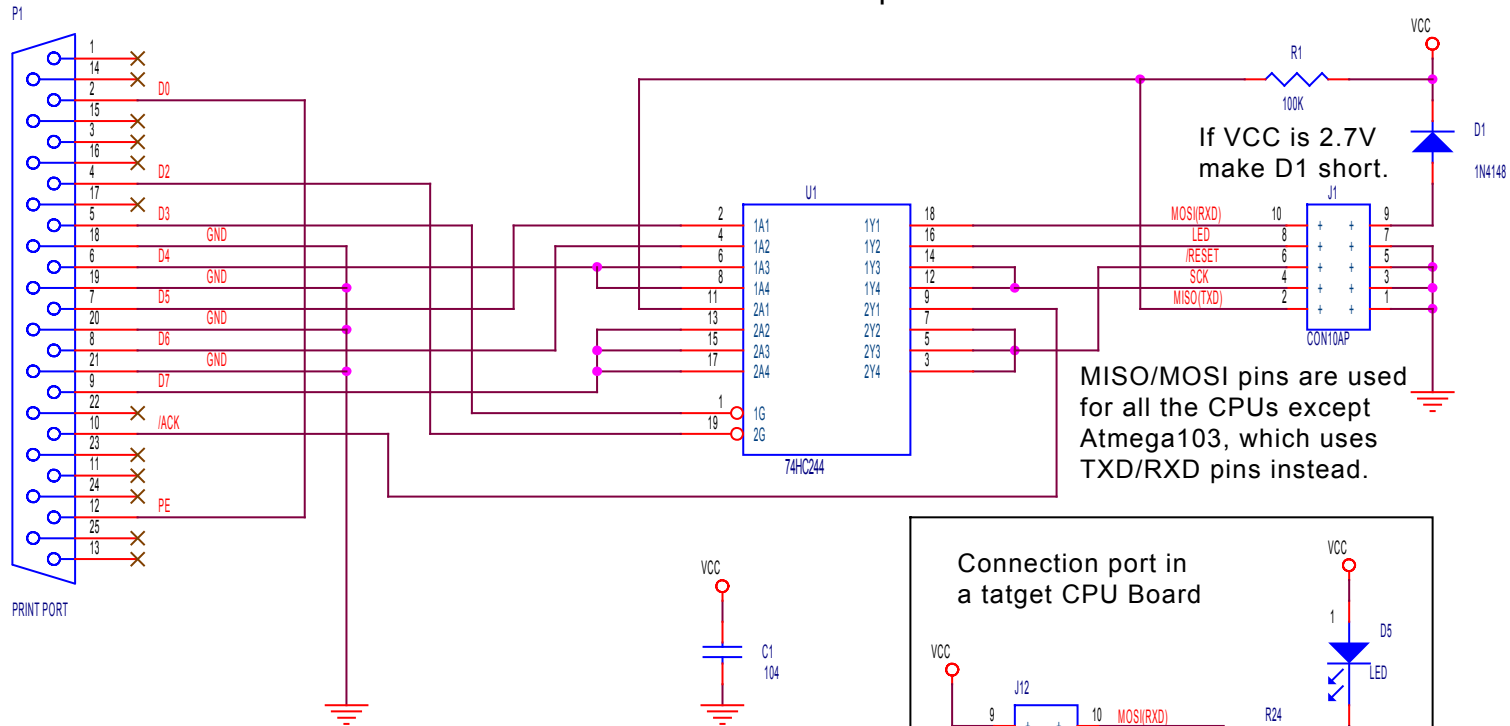
MISO/MOSI pins are used for all the CPUs except Atmega103, which uses TXD/RXD pins instead.

Connection port in a tatget CPU Board

www.active-robots.com