


TFT-LCD Panels

A/V Applications

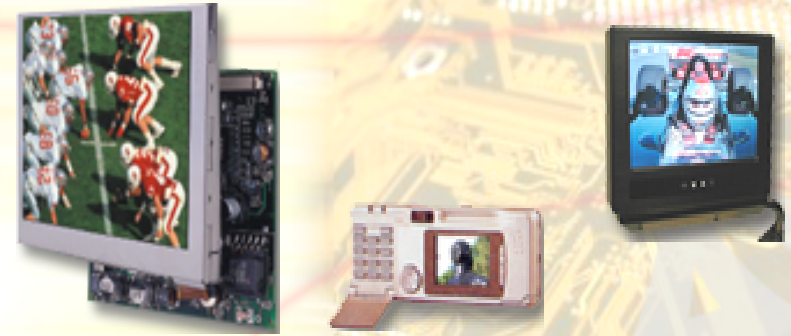

Screen Size	1.5"	1.5"	1.8"	1.8"	2.5"
Model Name	A015AN02	A015AN03	A018AN02	A018AN03	A025CN03
Resolution W x H	280 x 220 (dot)	280 x 220 (dot)	280 x 220 (dot)	280 x 220 (dot)	480 x 234 (dot)
Viewing Angle T/D/L/R	10/30/45/45 (min)	10/30/45/45 (min)	10/30/45/45 (min)	10/30/45/45 (min)	10/30/45/45 (min)
Brightness (nit)	200	200	250	240	250
Contrast Ratio	150 : 1	150 : 1	150 : 1	150 : 1	150 : 1
Power Consumption (W)	0.174	0.171	0.559	0.236	TBD
Active Area WxH (mm)	29.54x22.22	29.54x22.22	35.6x26.6	35.6x26.6	49.2x38.142
Dimensions WxHxD (mm)	40.5x34.65x3.9	40.1x34.6x3.9	48.6x39.6x6.1	48.6x39.8x3.9	59.9x50.4x4.2
Weight (g)	10	10	20	12.6	TBD
Light Source	LED x 2	LED x 2	LED x 2	LED x 2	LED x 4
Interface	Digital	Analog	Analog	Digital	Analog
Operating Temperature	0~60	0~60	0~60	0~60	0~60
Storage Temperature	-25~80	-25~80	-25~80	-25~80	-25~80
Lamp life (min)	10000	10000	10000	10000	10000
Touch Panel Available	N / A	N / A	N / A	N / A	N / A


Specifications are subjected to change.

An Authorized Sales Representative of AU Optronics Corporation.



TFT-LCD Panels

A/V Applications

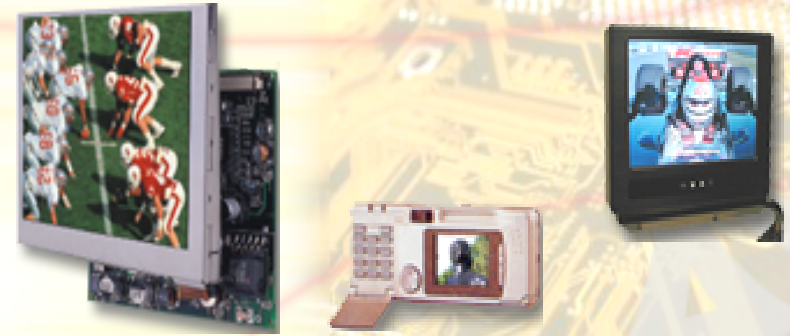

Screen Size	3.5"	3.6"	4.0"	4.0" V2	5.6"	5.6" V2
Model Name	A035CN02	A036QN02	A040CN01	A040CN01-2	A056DN01	A056DN01-2
Resolution W x H	480 x 234 (dot)	960 x 240	480 x 234 (dot)	480 x 234 (dot)	320 x 234 (dot)	320 x 234 (dot)
Viewing Angle T/D/L/R	10/30/40/40 (min)	10/30/45/45 (min)	10/30/45/45 (min)	40/60/60/60 (min)	10/30/45/45 (min)	45/60/60/60 (min)
Brightness (nit)	250	250	250	350	300	530
Contrast Ratio	150 : 1	150 : 1	150 : 1	150 : 1	150 : 1	250 : 1
Power Consumption (W)	TBD	TBD	0.88	0.9	2.95	2.95
Active Area WxH (mm)	72x50.544	72.96x54.72	82.1x61.8	82.1x61.8	113.3x84.7	113.3x84.7
Dimensions WxHxD (mm)	83x60.5x4.5	84.3x66.42x3.2	96x76x6.5	96x76x6.5	126.5x100x6.8	126.5x100x6.8
Weight (g)	TBD	38	65	75	145	145
Light Source	LED x 4	LED x 4	CCFL	CCFL	CCFL L type	CCFL L type
Interface	Analog	Digital	Analog	Analog	Analog	Analog
Operating Temperature	0~60	0~60	0~60	0~60	0~60	0~60
Storage Temperature	-25~80	-25~80	-25~80	-25~80	-25~80	-25~80
Lamp life (min)	10000 (min)	10000 (min)	10000 (min)	10000 (min)	10000 (min)	10000 (min)
Touch Panel Available	N / A	Yes	Yes	Yes	Yes	Yes
Remark	---	---	---	---	---	---


Specifications are subjected to change.

An Authorized Sales Representative of AU Optronics Corporation.



TFT-LCD Panels

A/V Applications

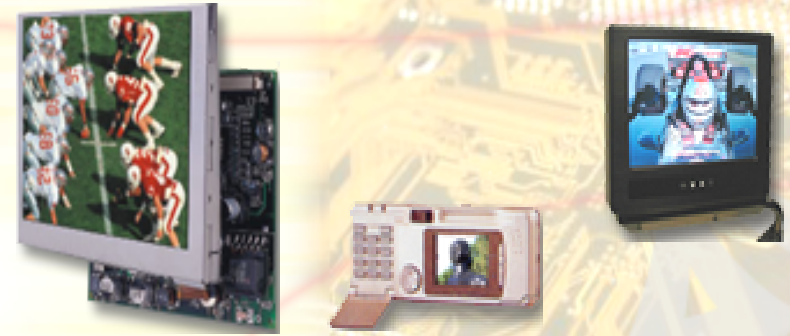

Screen Size	6.5" (16:9)	7.0" (16:9)	7.0" (16:9)	7.0" (16:9)	8.5" (16:9)	10.2" (16:9)
Model Name	A065GW01	A070FW03	A070FW03-1	A070VW01	A085FW01	A102VW01
Resolution W x H	400 x 234 (pixel)	480 x 234 (pixel)	480 x 234 (pixel)	800 x 480 (pixel)	1440 x 234 (dot)	800X480
Viewing Angle T/D/L/R	40/55/60/60 (typ)	40/60/60/60 (typ)	40/60/60/60 (typ)	40/60/60/60 (typ)	50/65/65/65 (typ)	50/60/60/60
Brightness (nit)	500	500	500	400	500	400
Contrast Ratio	300 : 1	300 : 1	300 : 1	300 : 1	300 : 1	300 : 1
Power Consumption (W)	3.35	TBD	TBD	TBD	3.6	3.3
Active Area WxH (mm)	143.4x79.326	154.08x86.58	154.08x86.58	152.4x91.44	187.2x105.3	222X133.2
Dimensions WxHxD (mm)	157.2x89.8x7.8	164.9x100x5.7	164.9x100x5.7	165x104x6	199x119x5.6	235X145.8X5.9
Weight (g)	155	162	160	170	235	305
Light Source	CCFL	CCFL	CCFL	CCFL	CCFL	CCFL
Interface	Analog	Analog	Analog	Digital	Analog	Digital
Operating Temperature	-30~70	-30~85	-30~85	-30~85	-30~75	-30~85
Storage Temperature	-40~95	-40~95	-49~95	-40~95	-30~80	-40~95
Lamp life (min)	40000 (typ)	10000 (min)	10000 (min)	---	15000 (min)	30000 (typ)
Touch Panel Available	N / A	N / A	N / A	Yes	N / A	N / A
Remark	Wide Temperature	Wide Temperature with Screwmount	Wide Temperature without Screwmount	Wide Temperature	Wide Temperature	Wide Temperature

Specifications are subjected to change.

An Authorized Sales Representative of AU Optronics Corporation.

