



**2N3773**


**NPN PLANAR SILICON TRANSISTOR**

**AUDIO POWER AMPLIFIER  
DC TO DC CONVERTER**

- High Current Capability
- High Power Dissipation

**ABSOLUTE MAXIMUM RATING (Ta=25°C)**

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	VCBO	160	V
Collector-Emitter Voltage	VCEO	140	V
Emitter-Base voltage	VEBO	7	V
Collector Current (DC)	IC	16	A
Collector Dissipation	PC	150	W
Junction Temperature	Tj	200	°C
Storage Temperature	Tstg	-50~150	°C

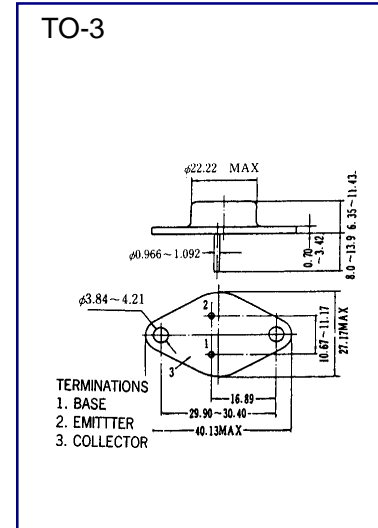

**ELECTRICAL CHARACTERISTICS (Ta=25°C)**

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Base Breakdown Voltage	BVCBO	IC=10 mA IE=0	100			V
Collector Emitter Breakdown Voltage	BVCEO	IC=5 mA RBE= $\infty$	100			V
Emitter Base Breakdown Voltage	BVEBO	IE=5 mA IC=0	6			V
Collector Cutoff Current	ICBO	VCB=30V IE=0			0.1	mA
Emitter Cutoff Current	IEBO	VEB=4V IC=0			0.1	mA
DC Current Gain	hFE	VCE=5V IC=8A	15		60	
Collector- Emitter Saturation Voltage	VCE(sat)	IC=8A IB=0.8A			1.0	V