

DC 100V 10A/50A/100A Voltmeter Ammeter LED Dual Digital Volt Amp Meter Gauge

2500Ft

Details:

- * This voltmeter gauge can help you measure the voltage and current
- * 100% Brand new and high quality
- * Current Measuring range(optional): DC 0~10A,DC 0~50A,DC 0~100A (more than 10A need shunt!!!)
- * The maximum input voltage can not exceed 30V. Otherwise the meter will be burned.
- * DC 0-50A and DC0-100A voltage gauges come with a current shunt
- * Working voltage of Meter itself: DC 4~30V
- * Working current of Meter itself: $\leqslant 20\text{mA}$
- * Voltage Measuring range: DC 0-100V
- * Voltage resolution (V): 0.1V
- * Current resolution (A): 0.01A
- * Measure accuracy: 1% (± 1 digit)
- * Display: 0.28" digital tube
- * Refresh rate: about 300mS/ times

* Operation Temperature: -10degree Celsius~+65degree Celsius

* Dimensions: approx. 48*29*26 mm/1.89*1.14*1.02 inch

Package contents:

Option1: 1* DC 100V 10A Voltmeter & Ammeter

Option2: 1* DC 100V 50A Voltmeter & Ammeter w/ 50A Current Shunt

Option3: 1* DC 100V 100A Voltmeter & Ammeter w/ 100A Current Shunt




Wiring diagram 2:

(The power for load must be DC 4 - 30V.

If not, please use the wiring diagram 1.

Otherwise the meter will be burned or not work.)

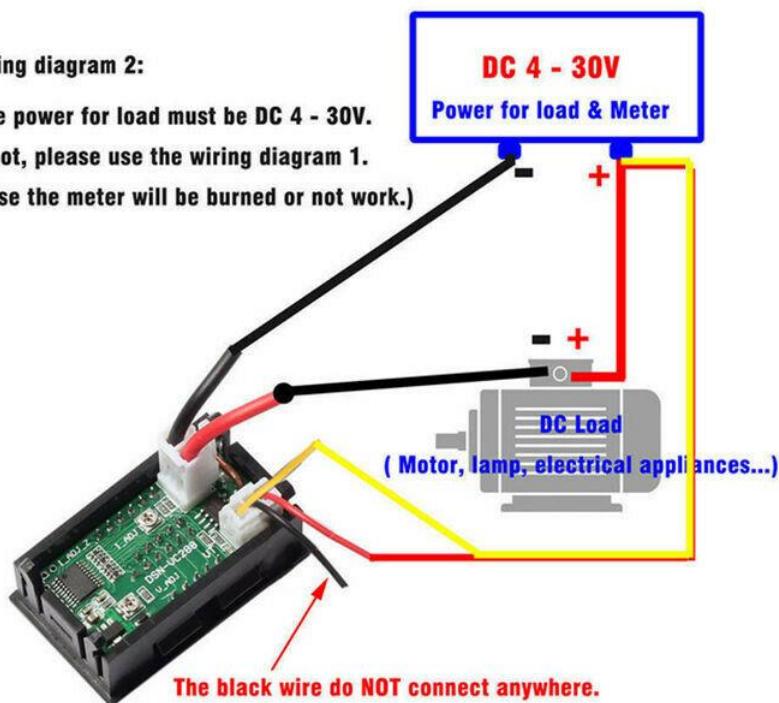

Wiring diagram 1:

(If the power to be measured is 4-30V,

you can use only one power source

wired like diagram 2)

