


RAVELAND




AXX 1010/1212/1515 Car-HiFi Subwoofer Chassis

- silver coated cone
- silver push terminals
- double magnet
- double spider
- lin. excursion +/- 9 mm

- silver die cast basket
- kapton voice coil former
- 30 mm high excursion foam surround
- designed for small cabinets

Gehäusevorschläge / recommended enclosures:

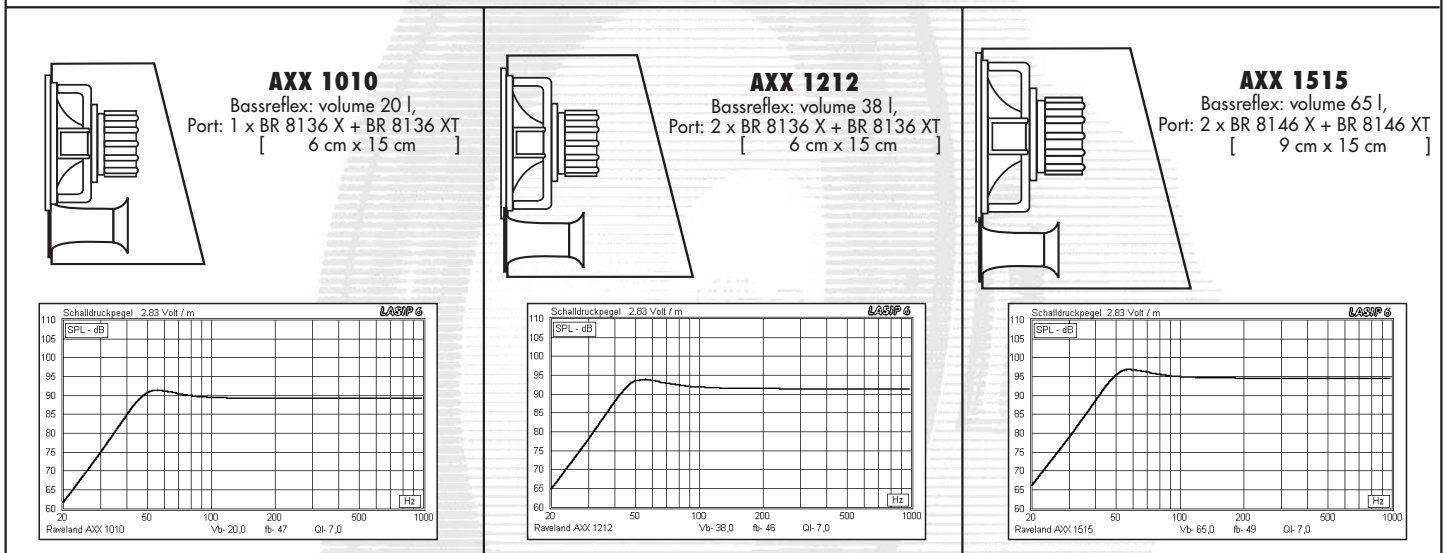

Technische Daten und Parameter / technical data and parameter

Typ / type:	AXX 1010	AXX 1212	AXX 1515
Nom. Impedanz Ohm / nom. impedance ohms:	4	4	4
Aussendurchmesser / overall diameter mm.	270	320	390
Einbaudurchmesser / mounting diameter mm:	236	286	354
Re Ohm / RDC ohms:	3.2	3.2	3.2
Resonanzfrequenz / resonance frequency Fs Hz	36	35	34
Mech. Dämpfung / mech. damping Qms:	4.65	4.76	4.35
Elekt. Dämpfung / elect. damping Qes:	0.37	0.38	0.34
Gesamt Dämpfung / total damping Qts:	0.34	0.35	0.32
Äquivalentvolumen / equivalent volume VAS L:	21.8	41.2	88
Membranfläche / cone area cm ² :	333	515	804
Schalldruck / sound pressure level SPL dB:	88	90	93
Belastbarkeit Watt R.M.S. / power handling watts R.M.S.	200	220	300
Belastbarkeit Watt max. / power handling watts max.	500	600	800

